


Electrical
 Contact Resistance: 20 milliohms
 Max at 1 Amp DC.
 Insulation Resistance: 1000
 magohms at 500 VDC
 Dielectric Withstanding Voltage:
 1000 VAC/rms 60Hz for 1 minute
 Current Rating: 5 Amp
 Volatge Rating: 250 VAC/rms 60Hz

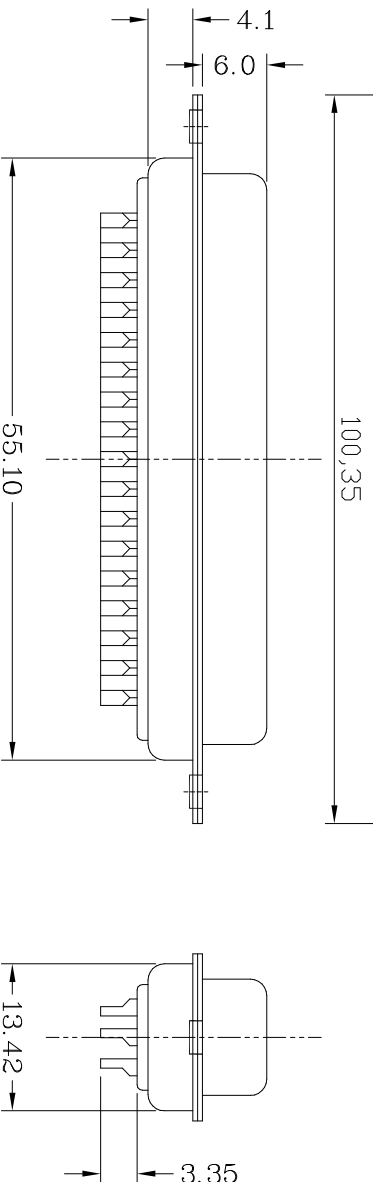

PART NO: B05-0504XIAN-01
 HOUSING COLOR:
 1 = BLACK
 5 = WHITE
 6 = BLUE

3	HOUSING	PBT+30%GF	COLOR:SEE NOTE	
2	REAR SHELL	STEEL	PLATING:Sn	
1	FRONT SHELL	STEEL	PLATING:NI	
ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS

NAME:	D-SUB 50P FEMALE 焊线式传统母头 (客户用图)			
REV:	A	UNIT:	mm	DRW BY
SCALE:	N:1	DATE:	2012/08/12	DRAWN BY
				KING ZHOU
				APP BY
				DRAWING NO.
				AD1-002

QUALITY SYMBOLS

□ : CRITICAL

⊠ : MAJOR

∇ : ZERO DEFECT

S.P.C

Tolerance

x. ±0.50

.x ±0.30

.xx ±0.25



8	7	6	5	4	3	2	1
△							
△							
△	2012/08/12新版发行	King Zhou					
SIDE	DATE	APPROVER					
8	7	6	5	4	3	2	1

东莞市箐围电子有限公司