


Electrical  
 Contact Resistance: 20 milliohms  
 Max at 1 Amp DC.  
 Insulation Resistance: 1000  
 mohms at 500 VDC  
 Dielectric Withstanding Voltage:  
 1000 VAC/rms 60Hz for 1 minute  
 Current Rating: 5 Amp  
 Volatge Rating: 250 VAC/rms 60Hz

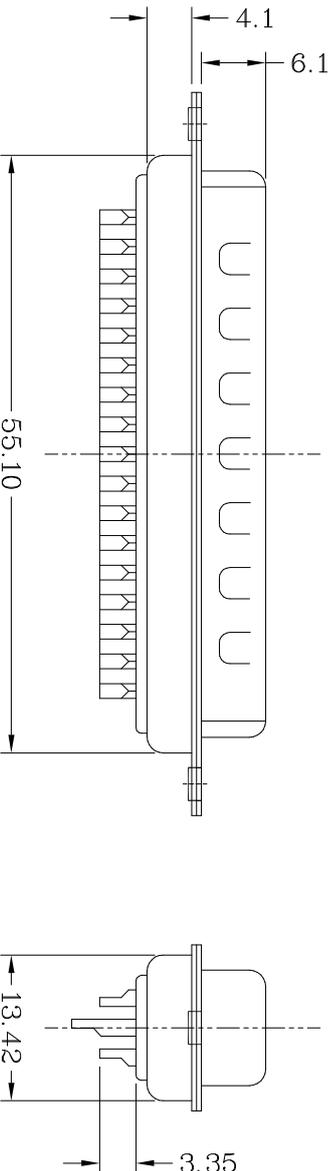

PART NO: B05-0503XIAN-01  
 HOUSING COLOR: 1 = BLACK  
 5 = WHITE  
 6 = BLUE

3	HOUSING	PBT+30%GF	COLOR:SEE NOTE
2	REAR SHELL	STEEL	PLATING:Sn
1	FRONT SHELL	STEEL	PLATING:NI

NAME: D-SUB 50P MALE 焊线式传统公头 (客户用图)  
 PART NO. B05-0503XIAN-01

REV:	A	UNIT:	mm	DRW BY:	CHK BY:	APP BY:	DRAWING NO.
SCALE:	N:1	DATE:	2012/08/12	DAWN HU	KING ZHOU		AD1-002

QUALITY SYMBOLS  
 : CRITICAL  
 : MAJOR  
 : ZERO DEFECT  
 : S.P.C

Tolerance	x.	±0.50
	x	±0.30
	.xx	±0.25

东莞市箐国电子有限公司

8	7	6	5	4	3	2	1
DATE	DESCRIPTION	APPROVER	ZERO DEFECT	S.P.C			
2012/08/12	新版发行	King Zhou					
SIDE							
8							