


REV.	ECN NUMBER	DESCRIPTION	DATE	DRAWN	CHECKE	APPROVE
X1	ECNXXXXXX	INITIAL RELEASE	05/19'21	ShiLi Yang	Zhiyu Chen	Aaron Cai

- NOTES:
- ELECTRICAL AND MECHANICAL PERFORMANCE SHOULD MEET THE SAS2.1 INDUSTRIAL STANDARD.
 - 电气和机械特性满足SAS2.1工业标准.
- THE CABLE ASSEMBLY SHOULD BE ROHS COMPLIANT.
该产品符合RoHS.

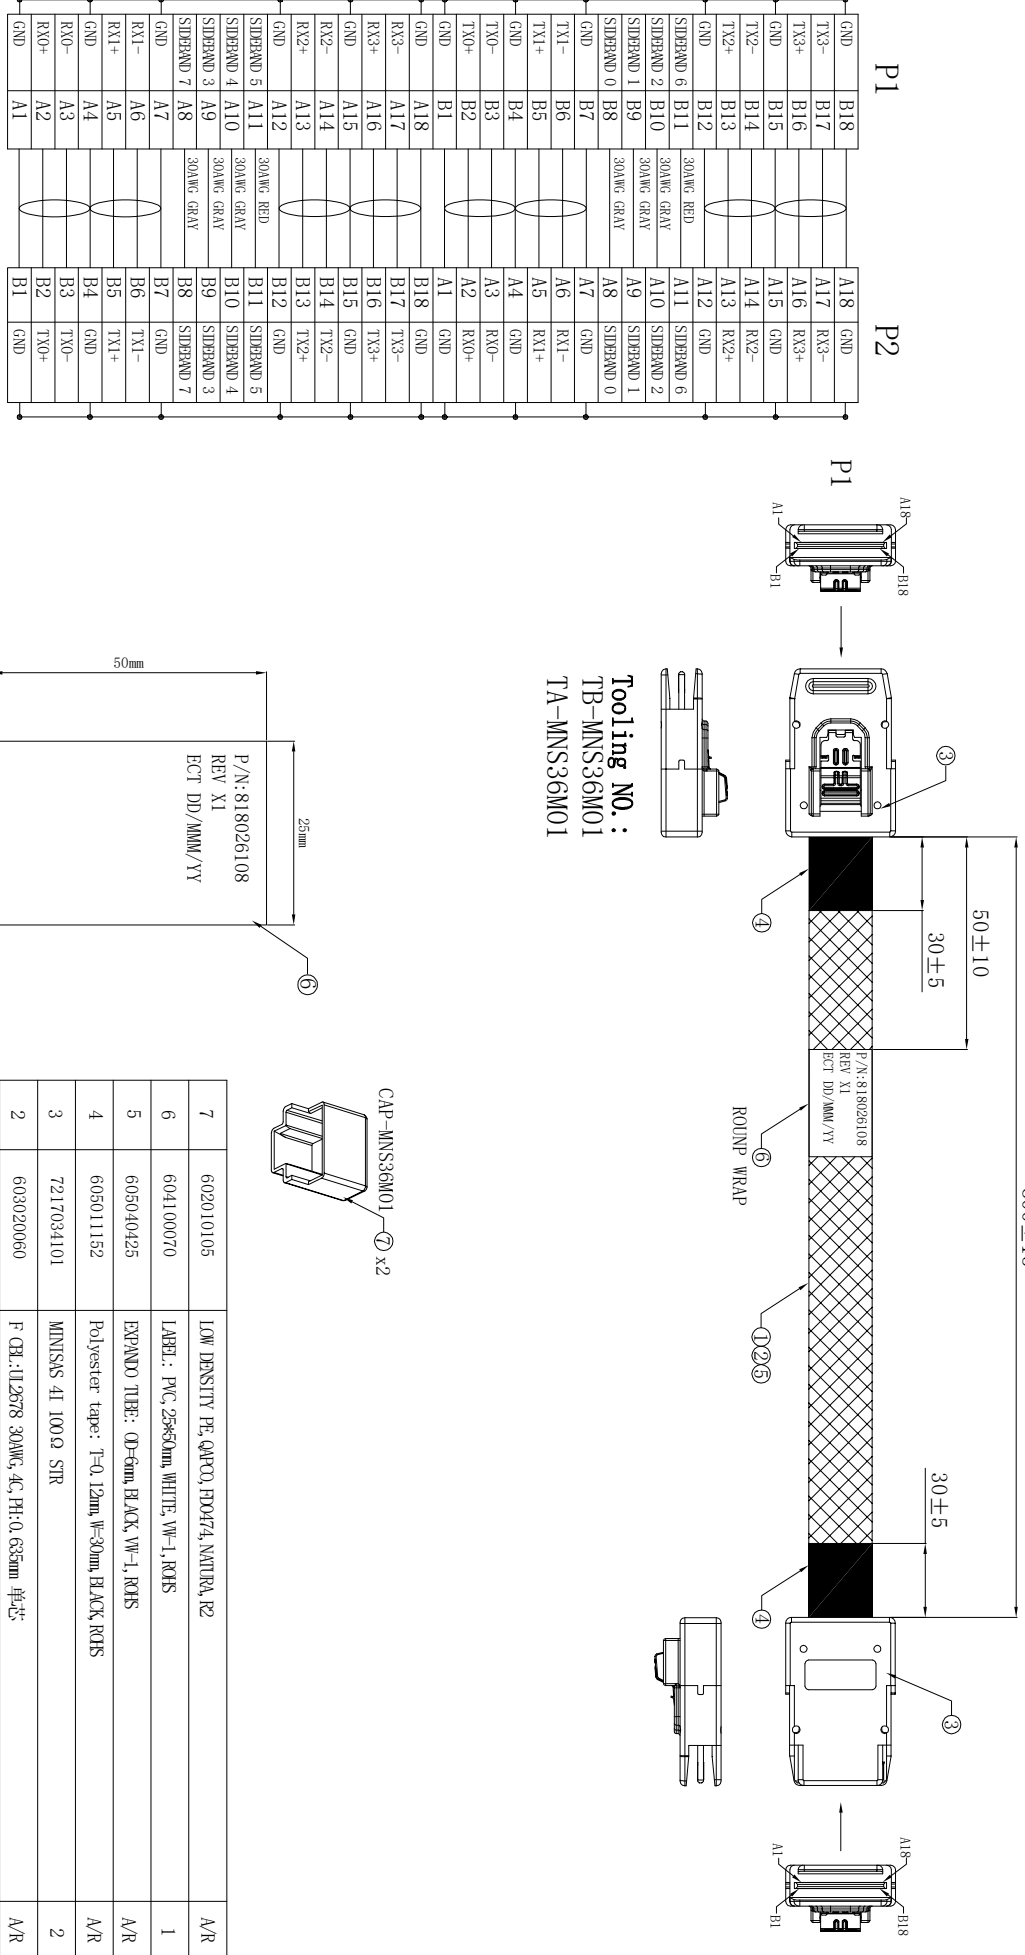

P1		P2	
GND	B18	A18	GND
TX3-	B17	A17	RX3-
TX3+	B16	A16	RX3+
GND	B15	A15	GND
TX2-	B14	A14	RX2-
TX2+	B13	A13	RX2+
GND	B12	A12	GND
SIDEBAND 6	B11	A11	SIDEBAND 6
SIDEBAND 2	B10	A10	SIDEBAND 2
SIDEBAND 1	B9	A9	SIDEBAND 1
SIDEBAND 0	B8	A8	SIDEBAND 0
GND	B7	A7	GND
TX1-	B6	A6	RX1-
TX1+	B5	A5	RX1+
GND	B4	A4	GND
TX0-	B3	A3	RX0-
TX0+	B2	A2	RX0+
GND	B1	A1	GND
RX3-	A18	B18	GND
RX3+	A17	B17	TX3-
GND	A16	B16	TX3+
RX2-	A15	B15	GND
RX2+	A14	B14	TX2-
GND	A13	B13	TX2+
SIDEBAND 5	A12	B12	GND
SIDEBAND 4	A11	B11	SIDEBAND 5
SIDEBAND 3	A10	B10	SIDEBAND 4
SIDEBAND 2	A9	B9	SIDEBAND 3
SIDEBAND 1	A8	B8	SIDEBAND 2
GND	A7	B7	GND
RX1-	A6	B6	TX1-
RX1+	A5	B5	TX1+
GND	A4	B4	GND
RX0-	A3	B3	TX0-
RX0+	A2	B2	TX0+
GND	A1	B1	GND

WIRE TABLE

GENERAL TOLERANCE

SCALE:	1:1
XX ± 5	XX ° ± 2°
X ± 1	X ° ± 1°
.X ± 0.5	.X ° ± 0.5°
.XX ± 0.25	

SCALE: 1:1
CHECK: ShiLi Yang
DATE: 05/19'2021

UNIT: mm
DATE: 05/19'2021

SIZE: A4


APPROVE: DATE:

DWG. NO: 151-26108-01

TITLE: MINISAS 4I STR TO MINISAS 4I STR 0.8M

REV. X1

ITEM	P/N	DESCRIPTION	QTY	UNIT
1	603010089	SAS3.0 Cable: U20744, 30AWG X 1P+25M (100 Ω 125)	A/R	mm
2	603020060	F CBL: U2678, 30AWG, 4C, 1H, 0.635mm 单芯	A/R	mm
3	7217034101	MINISAS 4I 100 Ω STR	2	PCS
4	605011152	Polyester tape: T=0.12mm, W=30mm, BLACK, RDS	A/R	mm
5	605040425	EXPANDO THER: OD=6mm, BLACK, VW-1, ROHS	A/R	mm
6	604100070	LABEL: PVC, 25*50mm, WHITE, VW-1, ROHS	1	PCS
7	602010105	LOW DENSITY PE, QAPCO, P30474, NATURA, R2	A/R	KG

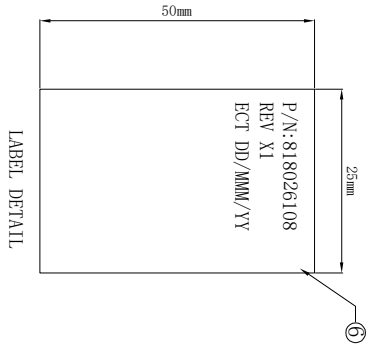

LABEL DETAIL

Tooling NO.:
TB-MNS36M01
TA-MNS36M01

ROHS

PARTS NO. (INTENDED USE): 818026108
东莞市箐国电子有限公司

SHEET: 1/1