


ROHS

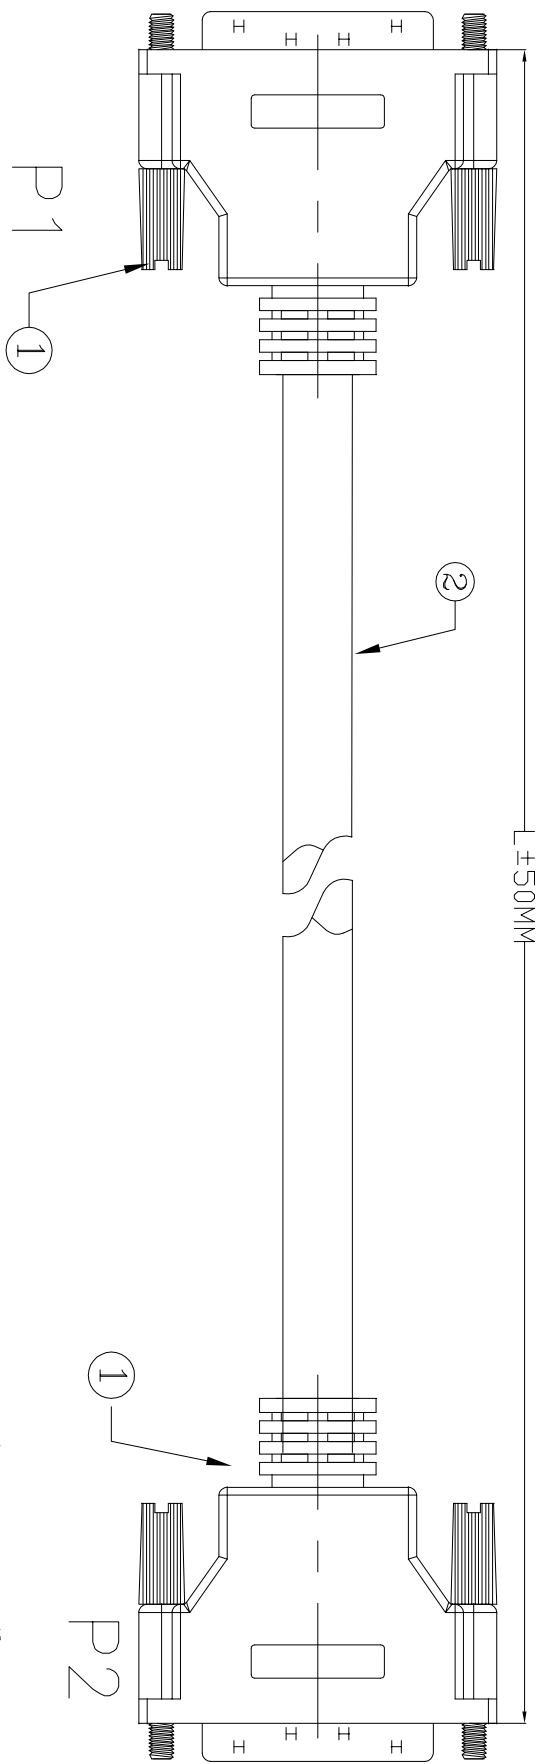

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO KinKuo INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN REMISSION.

- NOTES:
1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
  2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
  3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
  4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

PIN ASSIGNMENT

P1	SIGNAL	P2
1		1
2		2
3		3
4		4
5~34		5~34
35		35
36		36
Shell		Shell

Part NO	LENGTH	REMARK
1 FC-DC36-01S	L=1000MM	
2 FC-DC36-02S	L=1500MM	
3 FC-DC36-03S	L=2000MM	
4 FC-DC36-04S	L=3000MM	

ITEM	CONNECTOR	CABLE	DESCRIPTION	QTY/T
1	SCSI 36Pin Male ASS'Y	UL20276 28AWG*18.5P+AL+BRAID PVC JACKET COLOR:BLACK OD= 8.0mm	SCSI 36Pin Male ASS'Y ABS Hood Screw Type	2SET
2				1PCS

UNIT	SCALE	TOLERANCES
mm	2:1	DIM. ±0.10 ANGLE: ±1°

QUALITY SYMBOLS	CRITICAL	MAJOR
□	▽	▽
CRITICAL	ZERO DEFECT	S.P.C

REV	DESCRIPTION	DATE	DESCRIPTION	DATE	DESCRIPTION	DATE	DESCRIPTION	DATE	DESCRIPTION	DATE
A	图面发行	2021-05-22								
8										
7										
6										
5										
4										
3										
2										
1										

东莞市箐国电子有限公司