


REV.	DESCRIPTION	DATE
△		
△		

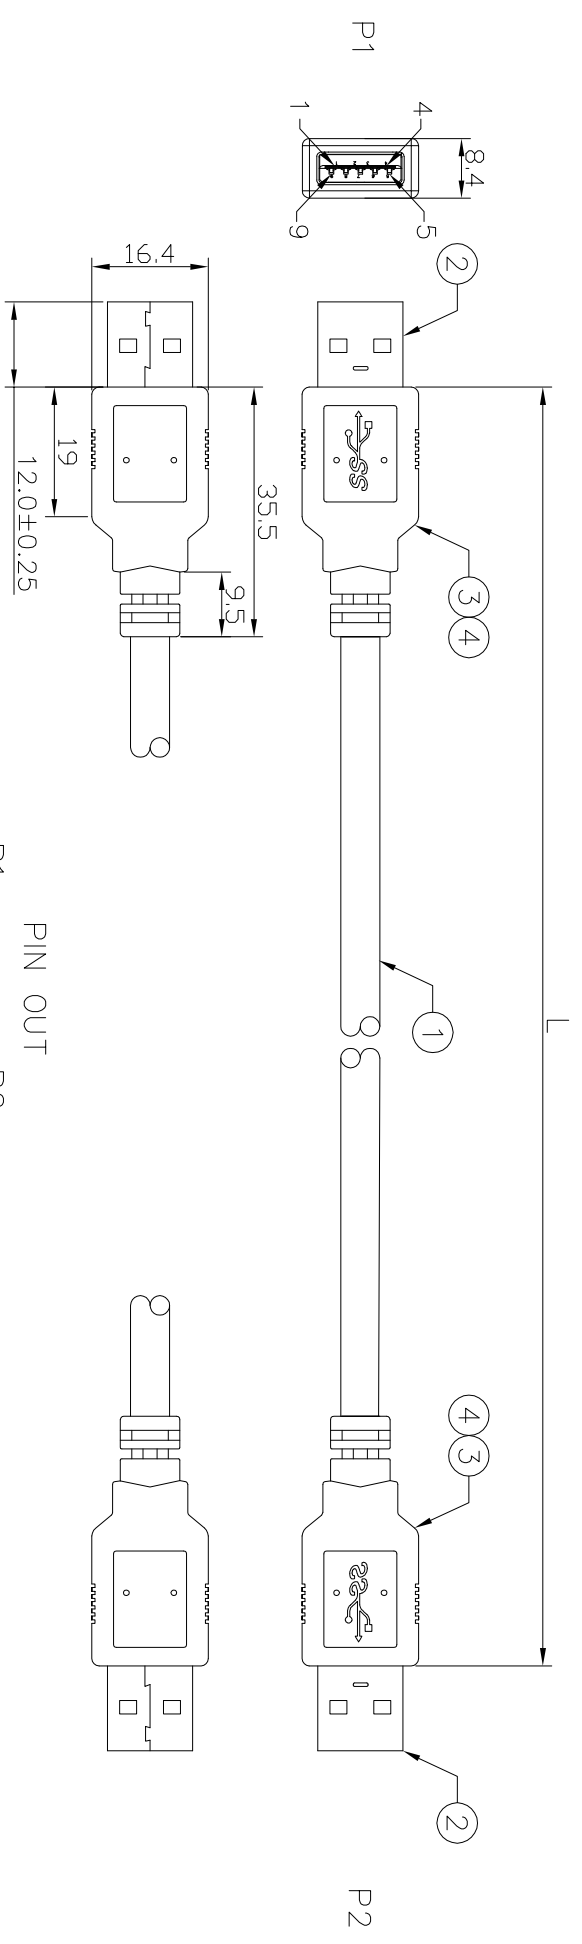

NOTE:

1. 100% OPEN & SHORT WIRE TEST;
2. CONTACT RESISTANCE 2ohm Max;
3. INSULATION RESISTANCE 10M ohm Min;
4. HI-POT DC 300V;

NO.	MATERIAL.P/N	DESCRIPTION	Q'TY	VENDOR	APPROVED:	DESCRIPTION:
4	PVC 50P BLACK/BLUE		8G			UNLESS OTHERWISE SPECIFIED TOLERANCE : xx ± ; angles : ;
3	LD-PE		3G			DESCRIPTION: USB3.0 AM to AM Cbble
2	USB(3.0) A TYPE MALE Au G/F Color: Blue		2SET			CUSTOMER P/N: LKU30AMAM01-XXM
1	UL20276 (USB3.0) (1P#28+DAM)*2C+2C#24+1P#28+ +AEB(AL) OD:5.5MM BLACK L:XX MM		1PCS			PRODUCT NO.: DWG NO: 20220422-22
NO.	MATERIAL.P/N	DESCRIPTION	Q'TY	VENDOR	APPROVED:	SCALE: NONE SHEET: 1 of 1 DATE: 20.05.14

东莞市箐围电子有限公司

UNLESS OTHERWISE SPECIFIED	TOLERANCE : xx ± ; angles : ;
CUSTOMER P/N: LKU30AMAM01-XXM	DESCRIPTION: USB3.0 AM to AM Cbble
PRODUCT NO.:	DWG NO: 20220422-22
SCALE: NONE	SHEET: 1 of 1
DATE: 20.05.14	