


REV.	DESCRIPTION	DATE

RoHS

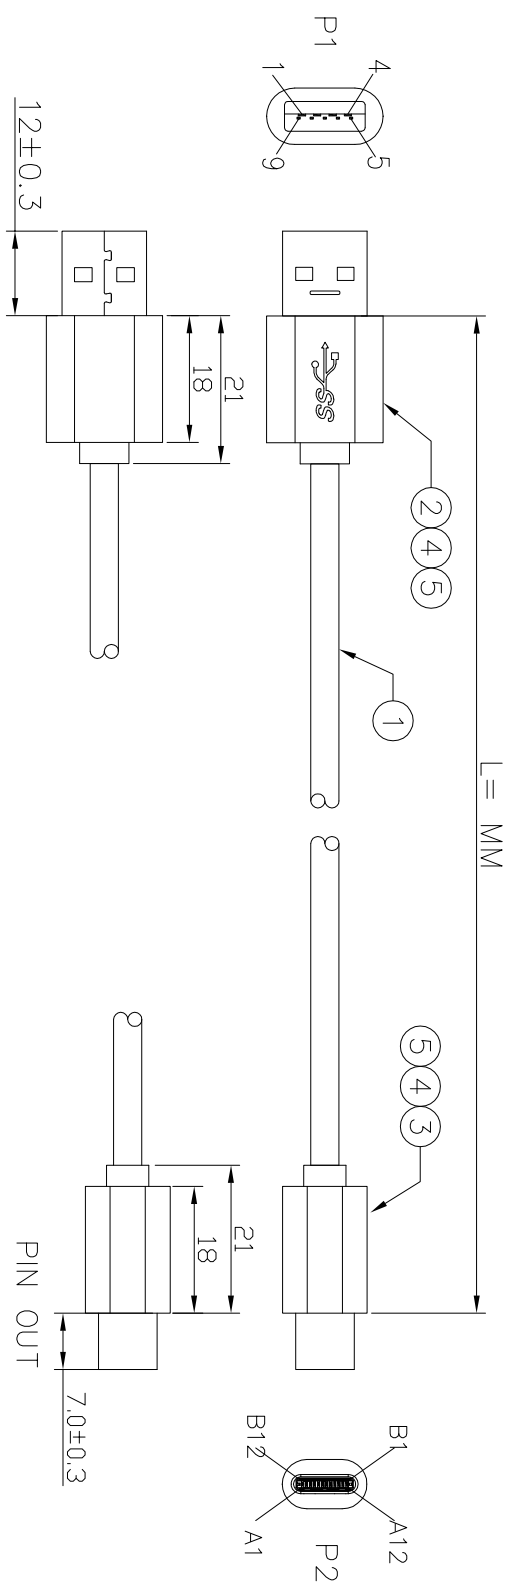

NOTE:

1. 100% OPEN & SHORT WIRE TEST;
2. CONTACT RESISTANCE 2ohm Max;
3. INSULATION RESISTANCE 10M ohm Min;
4. HI-POT DC 300V;

5	PVC 50P BLACK	10G		<p>东莞市箐国电子有限公司</p> <p>UNLESS OTHERWISE SPECIFIED TOLERANCE: x.xx ± x.xxx ± ; angles: °</p> <p>DESCRIPTION: USB 3.0 AM to TYPE C Cbble</p> <p>CUSTOMER P/N: LKU30AMTC01-XXM</p> <p>PRODUCT NO.: DWG NO: 20160129-01</p> <p>SCALE: NONE SHEET: 1 of 1</p>
4	PE	6G		
3	Type-C Male Connector Au 1U”	1PCS		
2	USB 3.0 A Male Connector Au G/F ,Color: Blue	1SET		
1	UL20276(USB3.1) (1P*32#+DAM)*2+1P*32#+1C*22#+AL+S PVC Jacket Black OD=3.8mm	1PCS		
NO.	MATERIAL.P/N	DESCRIPTION	Q'TY	APPROVED: