


REV.	DESCRIPTION	DATE
△		
△		
△		

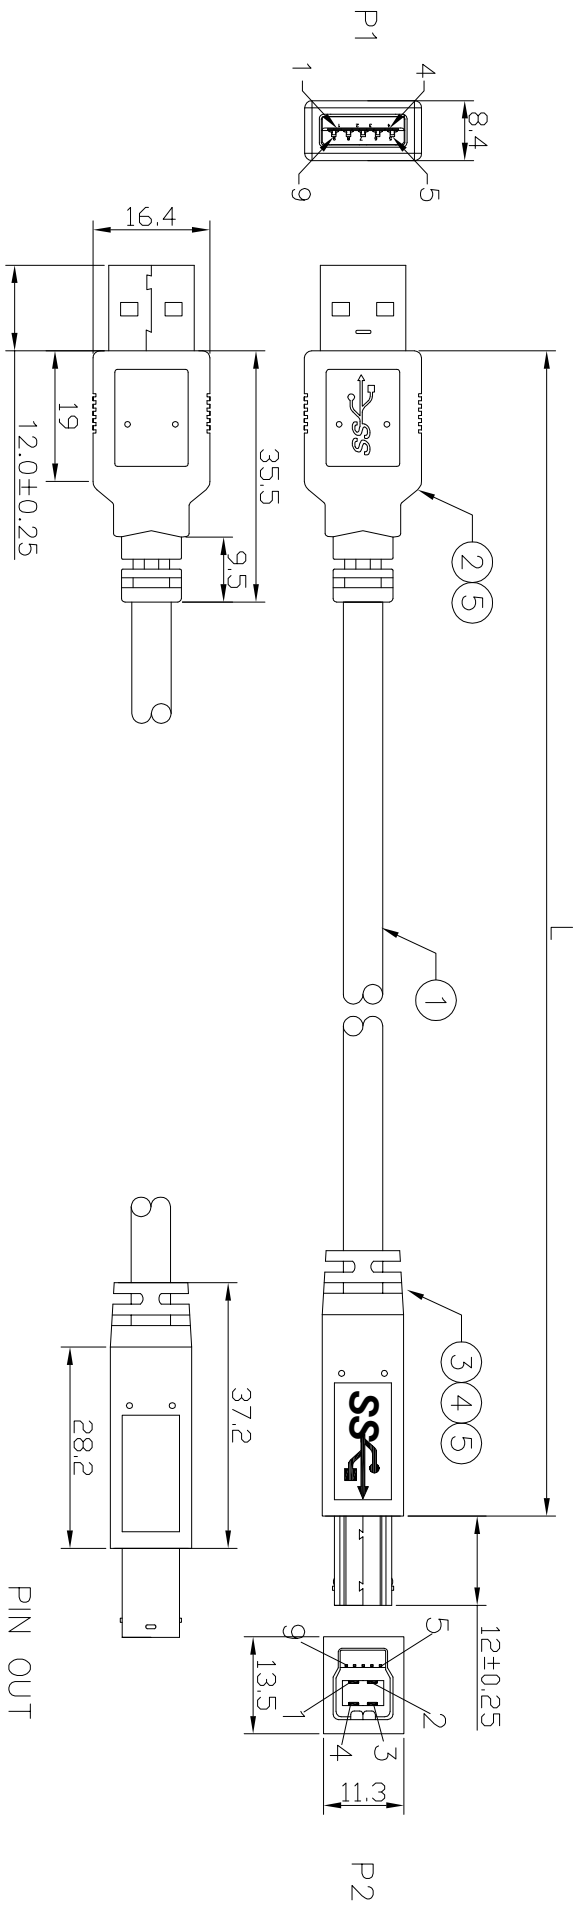

- NOTE:**
1. 100% OPEN & SHORT WIRE TEST;
 2. CONTACT RESISTANCE 2ohm Max;
 3. INSULATION RESISTANCE 10M ohm Min;
 4. HI-POT DC 300V;

5	PVC 50P BLACK	8G			<p>东莞市箐国电子有限公司</p> <p>UNLESS OTHERWISE SPECIFIED TOLERANCE : xx ± ; xx ± ; angles ± ;</p> <p>DRAWN: _____</p> <p>CHECKED: _____</p> <p>APPROVED: _____</p> <p>DESCRIPTION: USB 3.0 AM to BM Cable</p> <p>CUSTOMER P/N: LKU30AMB01-XXM</p> <p>PRODUCT NO.: _____</p> <p>DWG NO: 20200514-22</p> <p>REV: X/0</p> <p>UNIT: mm</p> <p>SCALE: NONE</p> <p>SHEET: 1 of 1</p> <p>DATE: 20.05.14</p>
4	LD-PE	3G			
3	USB(3.0) B TYPE Male Color Blue Au G/F Shell Ni	1SET			
2	USB(3.0) A TYPE Male Color Blue Au G/F Shell Ni	1SET			
1	UL20276 (USB3.0) (1P#28+DAM)*2C+2C#24+1P#28+ AEB(AL) OD:5.5MM BLACK L:XX MM	1PCS			
NO.	MATERIAL.P/N	DESCRIPTION	Q'TY	VENDOR	