


REV.	DESCRIPTION	DATE
△		
△		

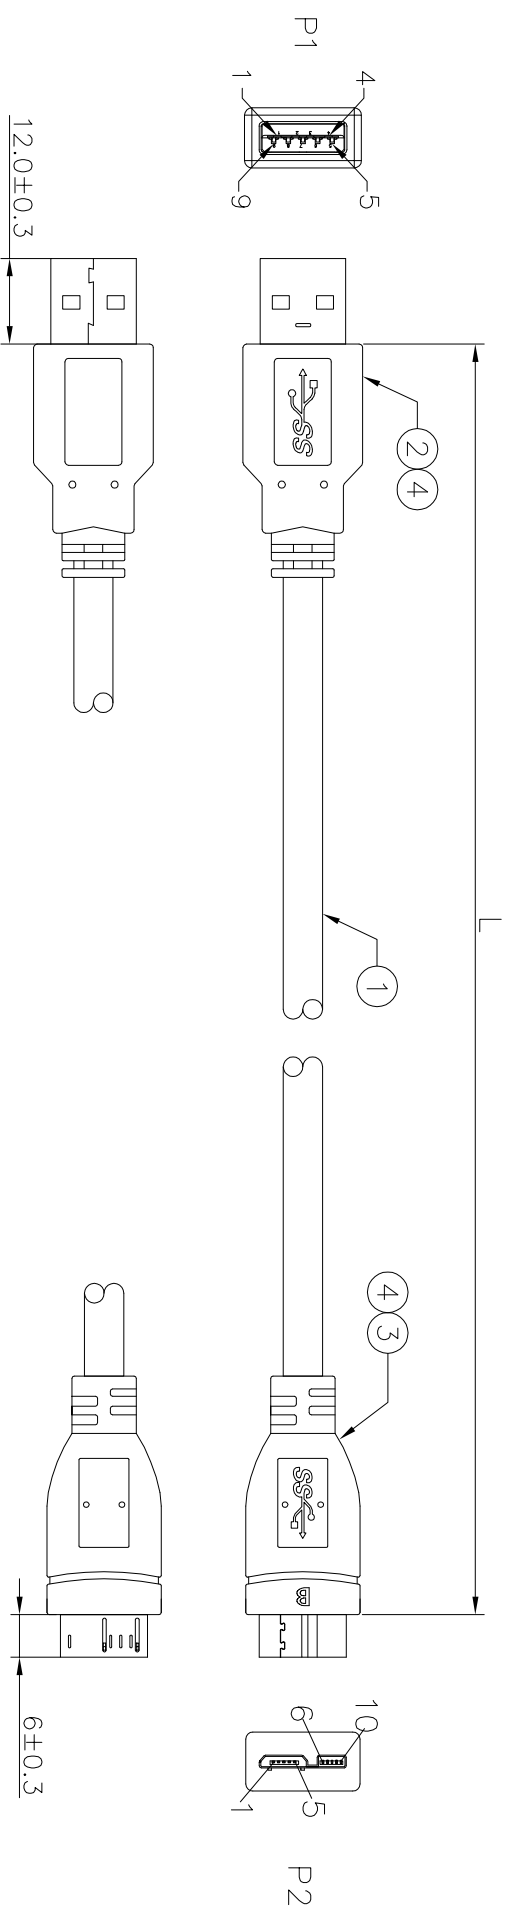

PIN OUT

P1	1 RED	P2	1
	2 WHITE		2
	3 GREEN		3
	4 BLACK		5
	5 BLUE		6
	6 YELLOW		7
	7 DRAIN		8
	8 PURPLE		9
	9 ORANGE		10
	10 DRAIN+BRAID		SHELL

NOTE:
 1.100% OPEN & SHORT WIRE TEST;
 2.CONTACT RESISTANCE 2ohm Max;
 3.INSULATION RESISTANCE 10M ohm Min;
 4.HI-POT DC 300V 0.01SEC;

4	P03000152	PVC 45P BLUE	30G							
3		USB(3.0) MICRO BM Color Black Au G/F	1SET							
2		USB(3.0) A TYPE Male Color Blue Au G/F	1SET							
1		UL20276(USB3.0)(1P#28+AE)*2+2C#24+1P#28+AE(B(AL 96B) OD: 5.5MM BLUE L: XX MM	1PCS							
NO.	MATERIAL.P/N	DESCRIPTION	Q'TY	VENDOR	APPROVED:					

东莞市箐国电子有限公司

UNLESS OTHERWISE SPECIFIED
 TOLERANCE: x.xx ± ; angles ± ;
 DRAWN: ;
 CHECKED: ;
 DESCRIPTION: USB 3.0 AM to 3.0 Micro-BM Cobble
 CUSTOMER P/N: LKU30AMRM01-XXM
 PRODUCT NO.:
 DWG NO: 20200514-23
 SCALE: NONE

REV: X/0 UNIT: mm DATE: 20.05.14
 SHEET: 1 of 1