


REV.		DATE

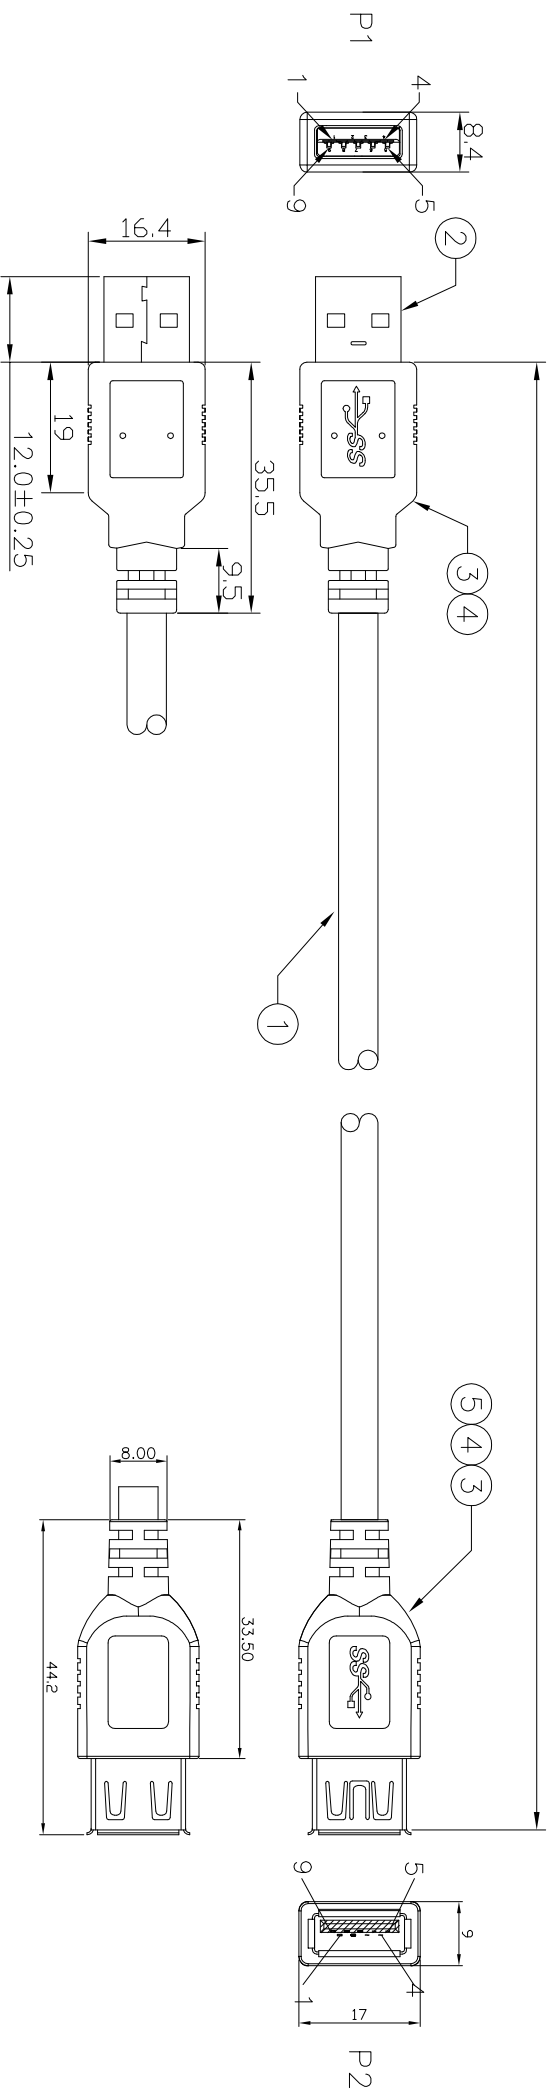

L = MM

- NOTE:
1. 100% OPEN & SHORT WIRE TEST;
 2. CONTACT RESISTANCE 2ohm Max;
 3. INSULATION RESISTANCE 10M ohm Min;
 4. HI-POT DC 300V;

P1	PIN OUT	P2
1	RED	1
2	WHITE	2
3	GREEN	3
4	BLACK	4
5	BLUE	5
6	YELLOW	6
7	DRAIN	7
8	PURPLE	8
9	ORANGE	9
	SHELL DRAIN+BRAID	9
	SHELL	SHELL

5	PVC 45P	15G		<p>东莞市箐国电子有限公司</p> <p>UNLESS OTHERWISE SPECIFIED TOLERANCE : xx ± ; angles : ° ; x.xx ± ;</p> <p>DESCRIPTION: USB 3.0 AM to AB(半包)</p> <p>CUSTOMER P/N: LKU30AMAF002-XM</p> <p>PRODUCT NO.: DWG NO: 20200514-27</p>				
4	PE	4G						
3	USB(3.0) A TYPE Female	1SET						
2	USB(3.0) A TYPE Male	1SET						
1	UL20276 (USB3.0) (1P#28+AE)*2+2C#24+1P#28+AE(B(AL) OD:5.5MM BLACK L:xx MM	1PCS						
NO.	MATERIAL.P/N	DESCRIPTION	Q'TY	VENDOR	APPROVED:	REV: X/0	UNIT: mm	DATE:20.05.14