RoHS

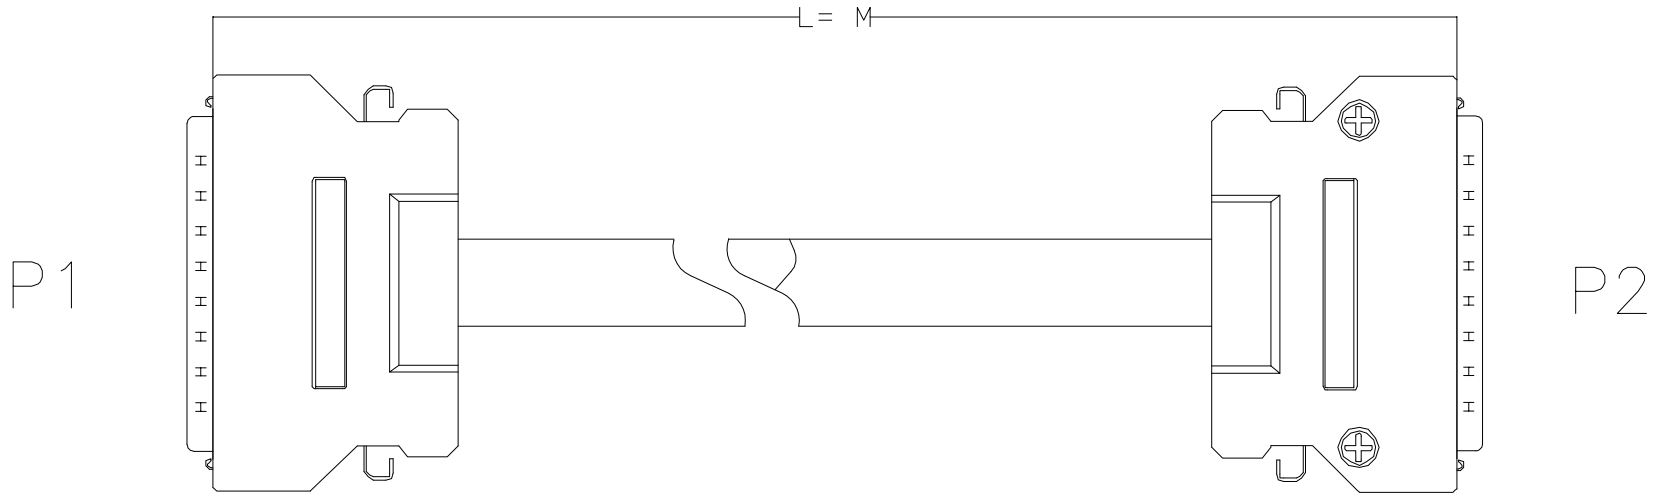

A08-06811-XXX-03

Length

005= 0.5M

010= 1.0M

~

100= 10.0M

P1



P2



PIN ASSIGNMENT

P1	SIGNAL	P2
1		1
2		2
3		3
4~65		4~65
66		66
67		67
68		68
Shell		Shell

NOTES:

1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

2	CABLE	UL20276 28AWG*34P+AL+BRAID PVC JACKET COLOR:BLACK OD= 11.0mm	1PCS
1	CONNECTOR	HPCN SCSI 68Pin Male ASS'Y TYPE	2SET

REV	DESCRIPTION	DATE
A	图面发行	2006-05-22

QUALITY SYMBOLS

■: CRITICAL ⊠: MAJOR

▽: ZERO DEFECT ▽: S.P.C

UNIT	SCALE	TOLERANCES
mm	2:1	DIM. ±0.10 ANGLE: ±1°

东莞市箐国电子有限公司

ITEM	PART NAME	DESCRIPTION	QY'T
APPROVED	CHECKED	DESIGN	DRAWN

PART NO.	A08-06811-XXX-03	SHT	1/1
DESCRIPTION	SCSI MDR 68P CABLE Latch Type		
DRAWING NO.		REV	A

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO KinKuo
INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN REMISSION.