
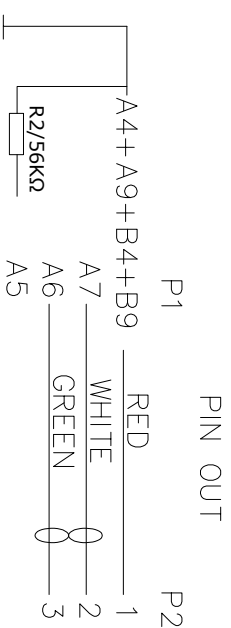
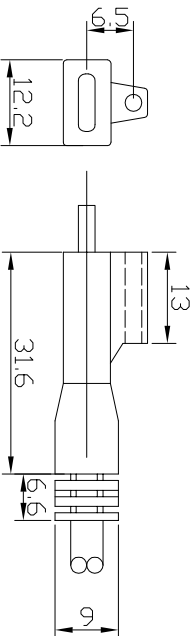


REV.	DESCRIPTION	DATE
△		
△		

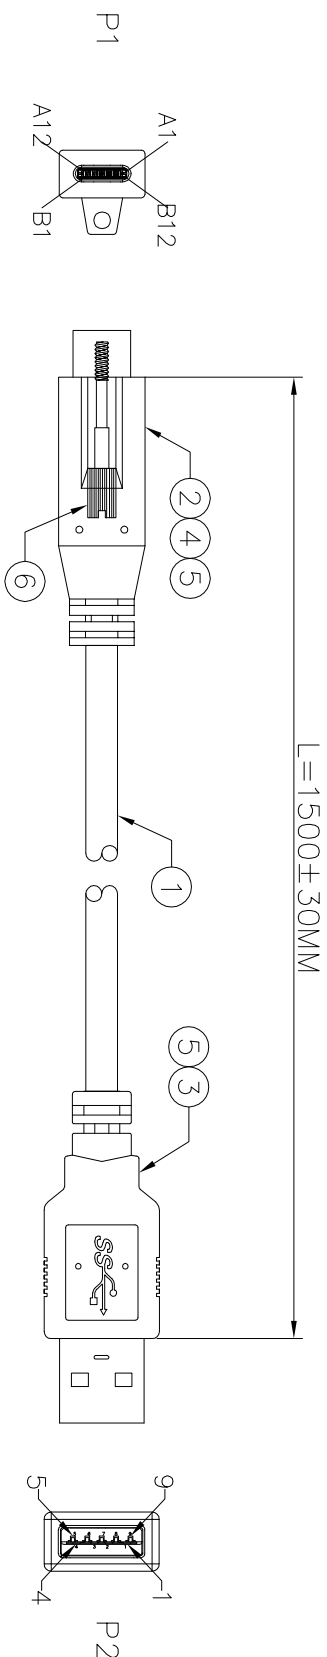

- NOTE:**
1. 100% OPEN & SHORT WIRE TEST;
 2. CONTACT RESISTANCE 2ohm Max;
 3. INSULATION RESISTANCE 10M ohm Min;
 4. HI-POT DC 300V;

6	SCREW	SCREW ϕ 4.0*L:25MM	1PCS	
5	OUT MOULD	PVC 50P BLACK	14G	
4	INTER MOULD	LD-PE	6G	
3	CONN2	USB3.0 A TYPE MALE BLUE AU: G/F	1SET	
2	CONN1	TYPE C-3.0 MALE BLACK AU: G/F	1PCS	
1	CABLE	UL20276 (USB3.0) (1P#30+DAM)*2C+2C#24+1P#30+AEB(AL) OD: 4.5MM BLACK L: XX MM	1PCS	
NO.	MATERIAL.P/N	DESCRIPTION	Q'TY	VENDOR

东莞市箐国电子有限公司

UNLESS OTHERWISE SPECIFIED

TOLERANCE: x.x ± ; .x ± ; angles: °

DRAWN: _____

CHECKED: _____

DESCRIPTION:

USB Type-C to USB 3.0 A/M Cable

CUSTOMER P/N: LKU30TCAM05-1.5M

PRODUCT NO.: _____ SCALE: NONE

DWG NO: 20221018-03 SHEET: 1 of 1

REV: X/0 UNIT: mm DATE: 22.10.18