



REV.	DESCRIPTION	DATE
△		
△		

RoHS

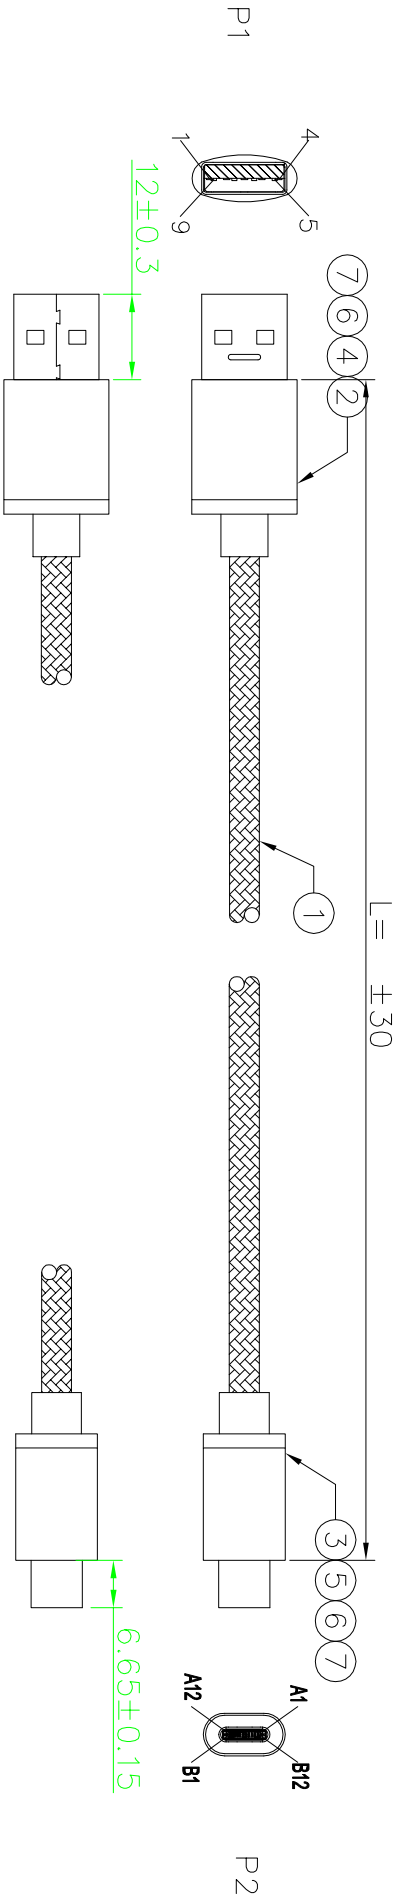

- NOTE:
1. 100% OPEN & SHORT WIRE TEST;
 2. CONTACT RESISTANCE 2ohm Max;
 3. INSULATION RESISTANCE 10M ohm Min;
 4. HI-POT DC 300V;

7	OVER MOULD	PVC 35P BLACK	10G	
6	INTER MOULD	PE	6G	
5	CAGE	SIZE:16*11.5*6.0mm H=0.75mm	1PCS	
4	CAGE	SIZE:17*14.9*6.7mm H=1mm	1PCS	
3	Connector	USB(3.0) TYPE-C Male Connector	1PCS	
2	Connector	USB(3.0) A TYPE Male Connector	1PCS	
1	Cable	USB3.1 (1P#32+AE)*2+1C#22+1P#32+AL+S(64B/0.08 TC) OD: 4.2MM With Nylon Braid Color: Grey	1PCS	
NO.	MATERIAL.P/N	DESCRIPTION	Q'TY	

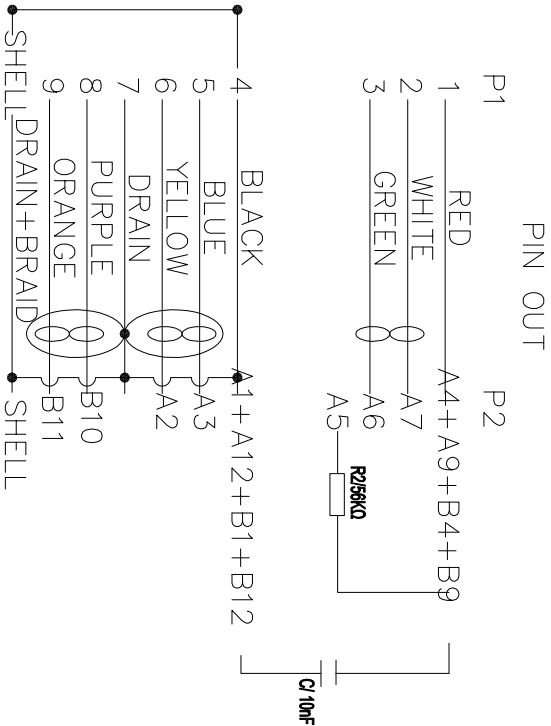

东莞市箐国电子有限公司

UNLESS OTHERWISE SPECIFIED TOLERANCE xxx ± ; angles ± ;		DESCRIPTION: USB 3.0 A/M to Type-C Cable	
DRAWN:		CUSTOMER P/N:	LKU30AMTC05-xxM
CHECKED:		PRODUCT NO.:	
APPROVED:		DWG NO: 20221103-01-01	SCALE: NONE
		REV: X/0	SHEET: 1 of 1
		UNIT: mm	DATE: 22.11.03