





No. of Contact	A	B	C	D
15	16.3	25.0	30.8	19.3
26	24.6	33.3	39.1	27.5
44	36.3	47.0	53.0	41.3
62	54.8	63.5	69.3	57.7

Voltage Current Rating: 5 AMP.
 Dielectric Withstanding Voltage: 1000V AC
 Insulation Resistance: 5000M Ω Min.
 Temperature Range: -25 $^{\circ}$ C to +85 $^{\circ}$ C

PART NO: B04-0XX6X14D-02

NO. OF CONTACT:
 15 = 15 pos
 26 = 26 pos
 44 = 44 pos
 62 = 62 pos

HOUSING COLOR:
 1 = BLACK
 5 = WHITE
 6 = BLUE

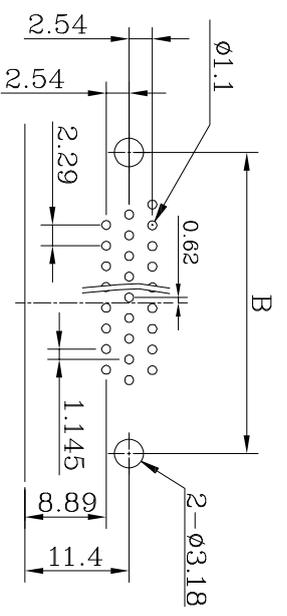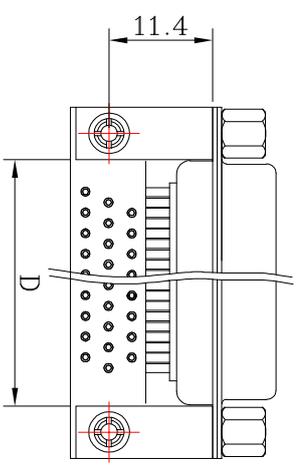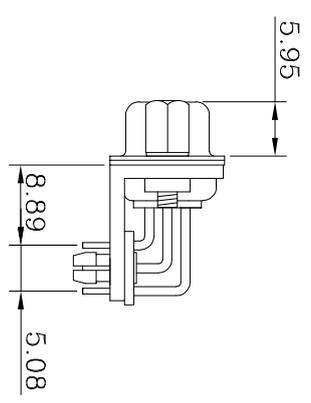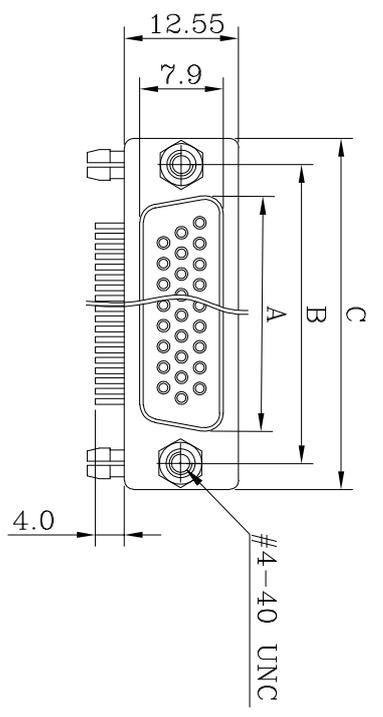

P.C.B LAYOUT

ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS
5	SCREW	STEEL		
4	BOARDLOCK	COPPER ALLOY		
3	HOUSING	PBT+30%GF	COLOR: BLACK	
2	SHELL	SPCC	PALTING: NI	
1	TERMINAL	COPPER ALLOY	CONTACT AREA: Au 2 μ " SOLDER AREA: Au 2 μ " UNDER-PLATING: NI	

QUALITY SYMBOLS	Tolerance	REV:	UNIT:	DRW BY	CHK BY	APP BY	DRAWING NO.
CRITICAL	X	A	mm	JINGLI	KING ZHOU		B04-011
MAJOR	.X						
ZERO DEFECT	.XX						

DATE	DESCRIPTION	APPROVER
2011/06/14	NEW ISSUE	JINGLI

Kinkuo 东莞市箐国电子有限公司
 www.kinkuo.com