

图例 Photo and Size

MS3106


MS3108



MS3102

MS3101

MS3100

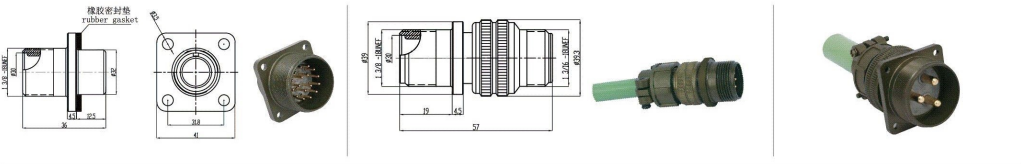

Note

- 1.Solder terminal 焊接式,MS3106A MS3108A MS3102A MS3101A MS3100A
- 2.Crimping terminal 压接式,MS4106A MS4108A MS4102A MS4101A MS4100A
- 3.Cable Clamp and Dust cap code 尾夹和防尘盖型号 MS3057-12A ;MS25042-22D,MS25043-22D
- 4.Zinc plated Army green, Silver and Black color option. 电镀默认军绿色, 银色和黑色可选

接触体排列及参数

Contacts Arrangement and Technical Parameters

内芯 Insert				
项目 Item				
代号 Code	22-1	22-2	22-4	22-22
芯数 No.of contacts	2	3	5	4
使用等级Service rating	A	A	A	A
接触及尺寸 Contacts size(AWG)	2*#8	3*#8	5*#8	4*#8
焊杯直径 Solder cup mouth(mm)	5.5	5.5	5.5	5.5
额定电流/电压 Rated current/voltage	50A/500V	50A/500V	50A/500V	50A/500V
工作电压 Operating voltage(AC.V)	500V	500V	500V	500V
耐电压 withstand voltage(AC.V 1min)	5000	5000	5000	5000
绝缘抗阻 Insulation resistance(MΩ) 500V	5000	5000	5000	5000
接触抗阻 Contact resistance (MΩMax)	≤1	≤1	≤1	≤1

内芯 Insert				
项目 Item				
代号 Code	22-23	22-19	22-14	22-16
芯数 No.of contacts	8	14	19	9
使用等级Service rating	A	A	A	A
接触及尺寸 Contacts size(AWG)	8*#12	14*#16	19*#16	3*#12;6*#16
焊杯直径 Solder cup mouth(mm)	3.2	1.7	1.7	3.2;1.7
额定电流/电压 Rated current/voltage	30A/500V	15A/500V	15A/500V	30A/500V;15A/500V
工作电压 Operating voltage(AC.V)	500V	500V	500V	500V
耐电压 withstand voltage(AC.V 1min)	5000	5000	5000	5000
绝缘抗阻 Insulation resistance(MΩ) 500V	5000	5000	5000	5000
接触抗阻 Contact resistance (MΩMax)	≤3	≤6	≤6	≤3;≤6