


图例 Photo and Size

MS3106


MS3108

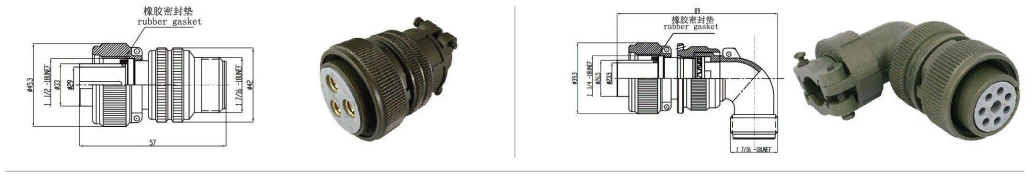

MS3102

MS3101

MS3100

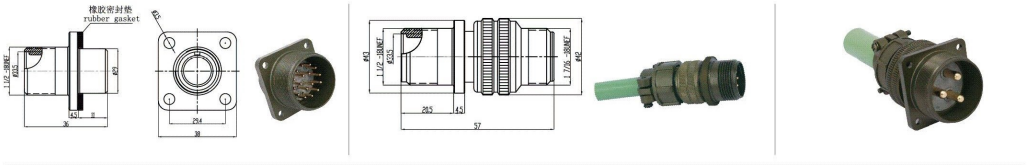

Note

- 1.Solder terminal 焊接式,MS3106A MS3108A MS3102A MS3101A MS3100A
- 2.Crimping terminal 压接式,MS4106A MS4108A MS4102A MS4101A MS4100A
- 3.Cable Clamp and Dust cap code 尾夹和防尘盖型号 MS3057-16A ;MS25042-24D,MS25043-24D
- 4.Zinc plated Army green, Silver and Black color option. 电镀默认军绿色, 银色和黑色可选

接触体排列及参数

Contacts Arrangement and Technical Parameters

内芯 Insert				
项目 Item				
代号 Code	24-7	24-10	24-11	24-22
芯数 No.of contacts	16	7	9	4
使用等级Service rating	A	A	A	A
接触及尺寸 Contacts size(AWG)	14*#16;2*#12	7*#8	3*#8;6*#12	4*#8
焊杯直径 Solder cup mouth(mm)	1.7;3.2	5.5	5.5;3.2	5.5
额定电流/电压 Rated current/voltage	15A/500V;30A/500V	50A/500V	50A/500V;30A/500V	50A/500V
工作电压 Operating voltage(AC.V)	500V	500V	500V	500V
耐电压 withstand voltage(AC.V 1min)	5000	5000	5000	5000
绝缘抗阻 Insulation resistance(MΩ) 500V	5000	5000	5000	5000
接触抗阻 Contact resistance (MΩMax)	≤ 6; ≤ 3	≤ 1	≤ 1; ≤ 3	≤ 1

内芯 Insert				
项目 Item				
代号 Code	24-28	24-58	24-88	24-19
芯数 No.of contacts	24	13	9	12
使用等级Service rating	A	A	A	A
接触及尺寸 Contacts size(AWG)	24*#16	3*#8;3*#12;7*#16	4*#8 / 5*#12	12*#16
焊杯直径 Solder cup mouth(mm)	1.7	5.5 ; 3.2 ; 1.7	5.5 / 3.2	1.7
额定电流/电压 Rated current/voltage	15A/500V	50A/500V;30A/500V 15A/500V	50A/500V / 30A/500V	15A/500V
工作电压 Operating voltage(AC.V)	500V	500V	500V	500V
耐电压 withstand voltage(AC.V 1min)	5000	5000	5000	5000
绝缘抗阻 Insulation resistance(MΩ) 500V	5000	5000	5000	5000
接触抗阻 Contact resistance (MΩMax)	≤ 6	≤ 1 ; ≤ 3 ; ≤ 6	≤ 1 / ≤ 3	≤ 6