


8 7 6 5 4 3 2 1

ROHS

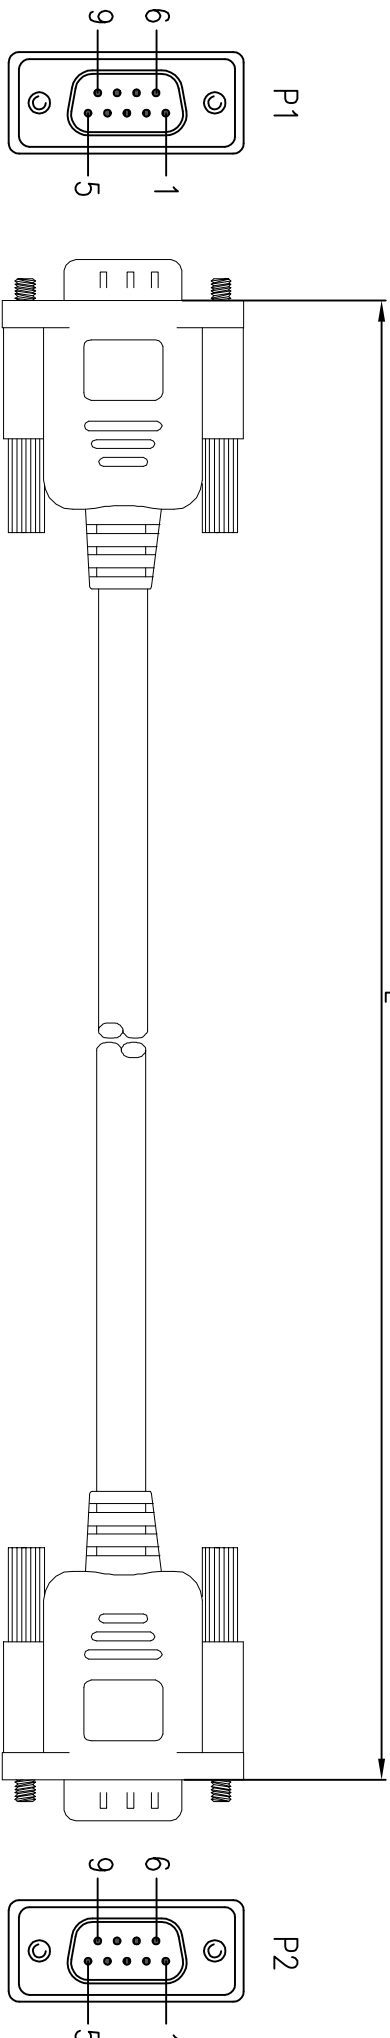

DB 9P Male

DB 9P Male

P1 PIN ASSIGNMENT P2

- NOTES:
1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
  2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
  3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
  4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

- 1 \_\_\_\_\_ 1 黑
- 2 \_\_\_\_\_ 2 棕
- 3 \_\_\_\_\_ 3 红
- 4 \_\_\_\_\_ 4 绿
- 5 \_\_\_\_\_ 5 黄
- 6 \_\_\_\_\_ 6 橙
- 7 \_\_\_\_\_ 7 蓝
- 8 \_\_\_\_\_ 8 灰
- 9 \_\_\_\_\_ 9 紫
- SHELL \_\_\_\_\_ SHELL
- DRAIN \_\_\_\_\_ SHELL

ITEM	PART NAME	DESCRIPTION	QTY
6	CABLE	UL2464 28AWG*9C+AD PVC JACKET COLOR:GRAY OD=5.0mm	1PCS
5	SCREW	SCREW 4-40# GRAY	4PCS
4	OVERMOLD	45P PVC COLOR: GRAY	1PCS
3	MOLD	PE	NA
2	CONNECTOR	D-SUB 9Pin Male Solder TYPE Block	1PCS
1	CONNECTOR	D-SUB 9Pin Male Solder TYPE Block	1PCS

QUALITY SYMBOLS		Tolerance		NAME:		PART NO.		DRAWING NO.	
<input type="checkbox"/> : CRITICAL	<input checked="" type="checkbox"/> : MAJOR	尺寸(CM)	公差(CM)	D-SUB 9P Male To 9P Male Cable	A05-00911XXX-01	REV:	A	CHK BY	APP BY
<input checked="" type="checkbox"/> : ZERO DEFECT	<input checked="" type="checkbox"/> : S.P.C	30~200	±10	UNIT: mm		SCALE:	NONE	DATE:	2017/04/21
		201~500	±20	DRW BY	JACK ZHENG KING ZHOU				
		501~	±30	CHK BY					

A	B	C	D	E	F
△	△	△	△	△	△
2017/04/21	新版发行	JANE ZHEN	APPROVER	APPROVER	APPROVER
DATE	DESCRIPTION	APPROVER	ZERO DEFECT	S.P.C	APPROVER
8	7	6	5	4	3
东莞市箐国电子有限公司					
1	2	3	4	5	6