


8 7 6 5 4 3 2 1

**RoHS**

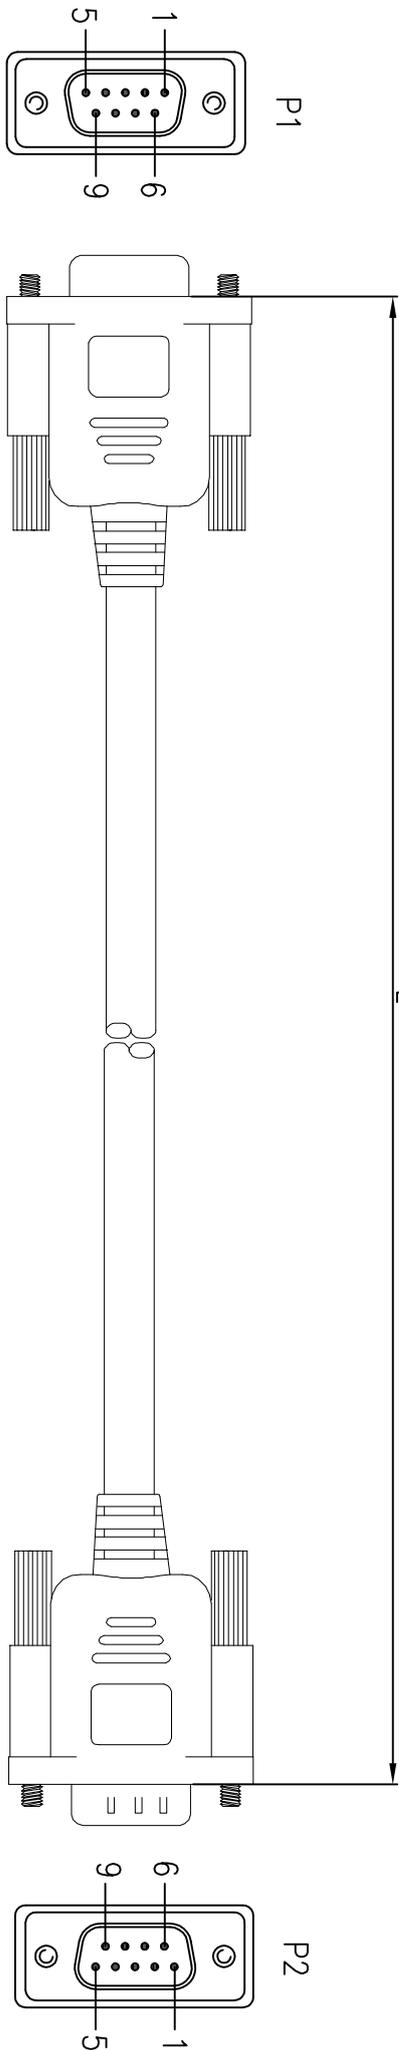

DB 9P 母

DB 9P 公

PIN ASSIGNMENT

- |    |   |   |   |   |   |   |   |   |   |
|----|---|---|---|---|---|---|---|---|---|
| P1 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
|    | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
|    | 黑 | 棕 | 红 | 绿 | 黄 | 橙 | 蓝 | 灰 | 紫 |
- SHELL \_\_\_\_\_ SHELL
- DRAIN \_\_\_\_\_ SHELL

NOTES:

1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

6	CABLE	UL2464 28AWG*9C+AD PVC JACKET COLOR:GRAY OD=5.0mm	1PCS
5	SCREW	SCREW 4-40# GRAY	4PCS
4	OVERMOLD	45P PVC COLOR: GRAY	1PCS
3	MOLD	PE	NA
2	CONNECTOR	D-SUB 9Pin Male Solder TYPE Black	1PCS
1	CONNECTOR	D-SUB 9Pin Female Solder TYPE Black	1PCS
ITEM	PART NAME	DESCRIPTION	QTY

QUALITY SYMBOLS

- : CRITICAL
- ▽ : MAJOR
- ▽ : ZERO DEFECT S.P.C

Tolerance

尺寸(CM)	公差(CM)
30~200	±10
201~500	±20
501~	±30

△					
△	2017/06/07	按客户要求变更尺寸标注	JANE ZHEN		
△	2017/04/21	新版发行	JANE ZHEN		
SIDE	DATE	DESCRIPTION	APPROVER		
8		7		6	5

NAME:	D-SUB 9P Male To 9P Female Cable		PART NO.	A05-00931XXX-01	
REV:	B	UNIT:	mm	DRW BY	CHK BY
SCALE:	NONE	DATE:	2017/04/21	JACK ZHENG	KING ZHOU
<b>东莞市箐国电子有限公司</b>					
				APP BY	DRAWING NO.
					A05-009