


ROHS

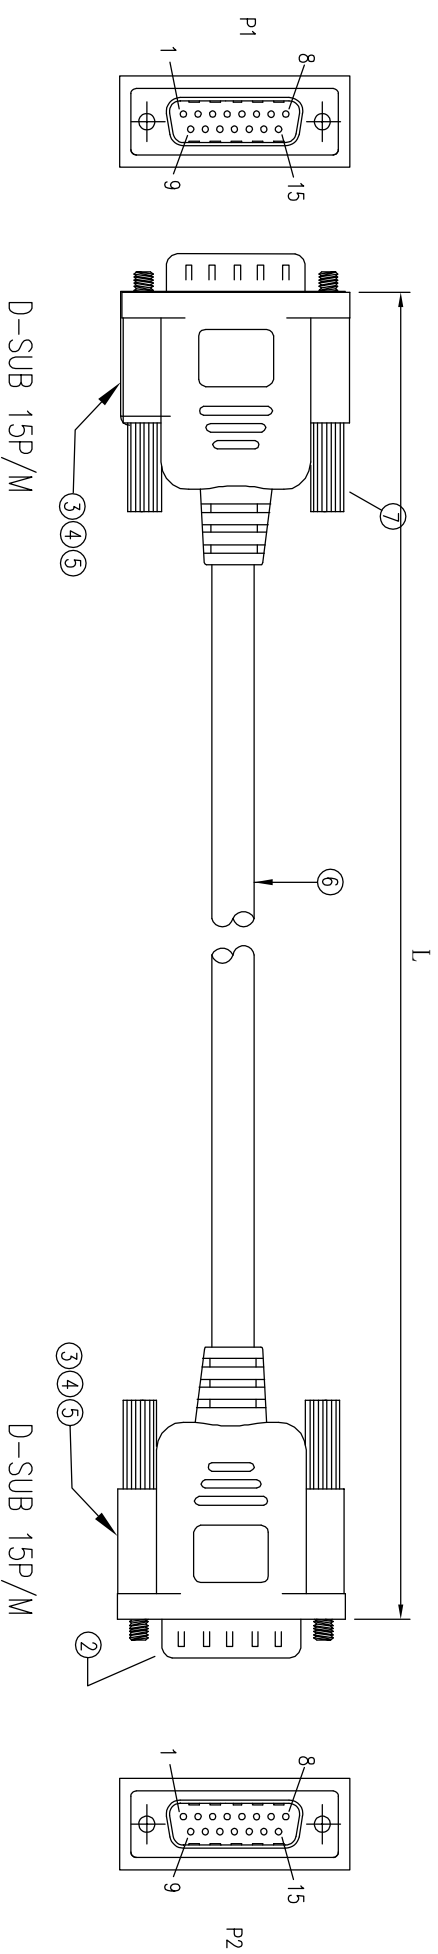

PIN ASSIGNMENT

P1	P2
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
Shell	Shell

NOTES:

1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

7	SCREW	SCREW 4-40# NI	4PCS
6	CABLE	UL2464 26AWG*15C+4ED PVC JACKET COLDR:GERY DD=7.5mm	1PCS
5	COPPER FOIL	COPPER FOIL W=25MM	NA
4	OVERMOLD	45P PVC COLDR: GERY	NA
3	MOLD	PE	NA
2	CONNECTOR	D-SUB 15Pin Male Solder WHITE	1PCS
1	CONNECTOR	D-SUB 15Pin Male Solder WHITE	1PCS
ITEM	PART NAME	DESCRIPTION	QY'T

QUALITY SYMBOLS

- : CRITICAL
 : MAJOR
 : ZERO DEFECT
 : S.P.C

Tolerance

R+(CM)	A±(CM)
30~200	±10
20~500	±20
50~	±30

NAME:	D-SUB 15P Male To 15P Male CABLE				PART NO.:	A05-01511XXX-01	
REV:	A	UNIT:	mm	DRW BY:	CHK BY:	APP BY:	DRAWING NO.:
SCALE:	NONE	DATE:	2018/05/24	JACK CHEN	KING ZHOU		A05-015

东莞市箐国电子有限公司

△	QUALITY SYMBOLS	APPROVER	DATE	DESCRIPTION	DATE	SIDE
△		JACK CHEN	2018/05/24	新版发行		A
△						
△						