


RoHS

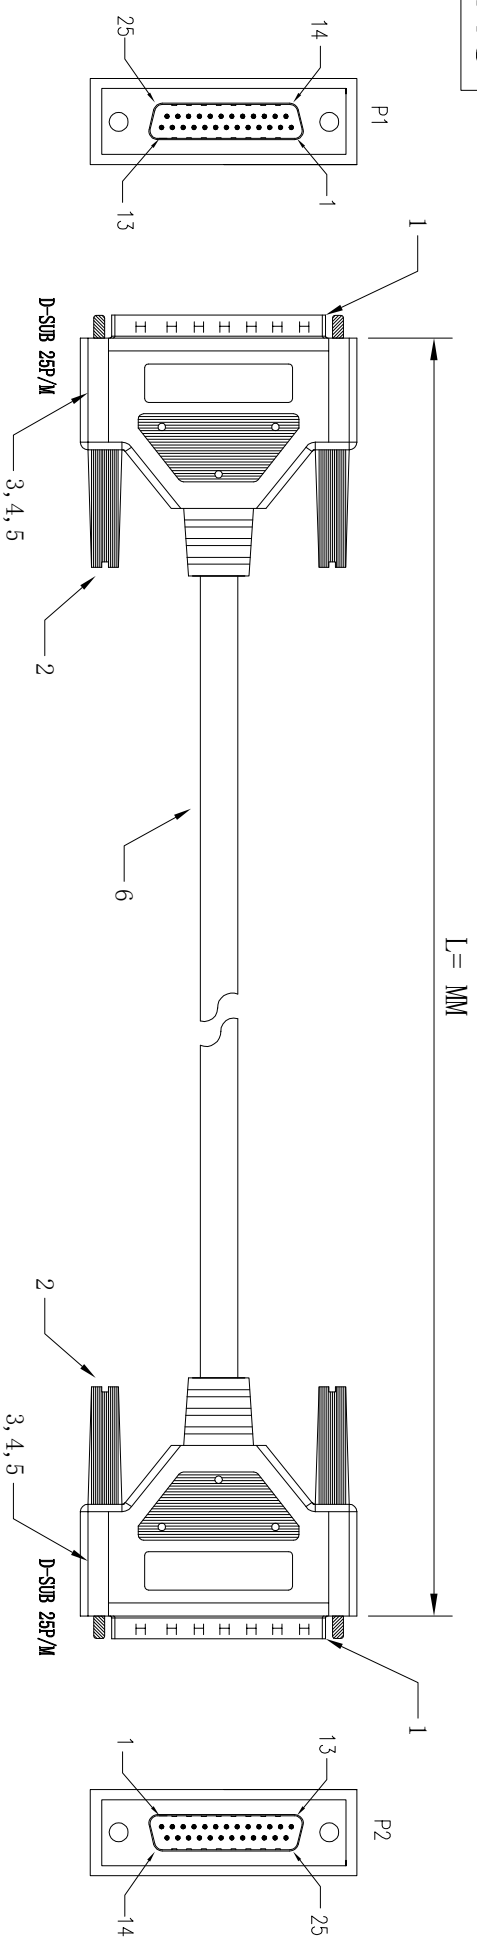


L = MM

NOTES:

1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

PIN ASSIGNMENT

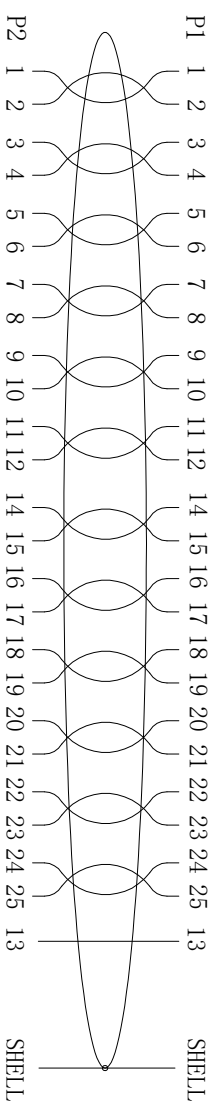

6	CABLE	UL2919 28AWG*13P+4ED PVC JACKET COLOR:BLACK OD= 7.5mm	1PCS
5	COPPER FOIL	COPPER FOIL W=25MM	NA
4	DYER/MOLD	4SP PVC COLDR: BLACK	NA
3	MOLD	PE	NA
2	SCREW	SCREW 4-40# NI (E33BK)	4PCS
1	CONNECTOR	DB25Pin Male Solder BLACK TYPE	1PCS
ITEM	PART NAME	DESCRIPTION	QTY

QUALITY SYMBOLS

□ :
CRITICAL MAJOR

△ :
ZERO DEFECT S.P.C

Tolerance

Rf(CM)	公差(CM)
30~200	±10
201~500	±20
501~	±30

NAME: D-SUB 25P Male To 25P Male Cable PART NO. A05-02511XXX-01

REV: A UNIT: mm DRAW BY CHK BY APP BY DRAWING NO. A05-025

SCALE: NONE DATE: 2018/05/24 DAW NHU KING ZHOU

△		
△		
△	2018/05/24	新版发行
SIDE	DATE	DESCRIPTION

APPROVER Jack Chen

8 7 6 5 4 3 2 1

东莞市箐国电子有限公司

8 7 6 5 4 3 2 1