



RoHS

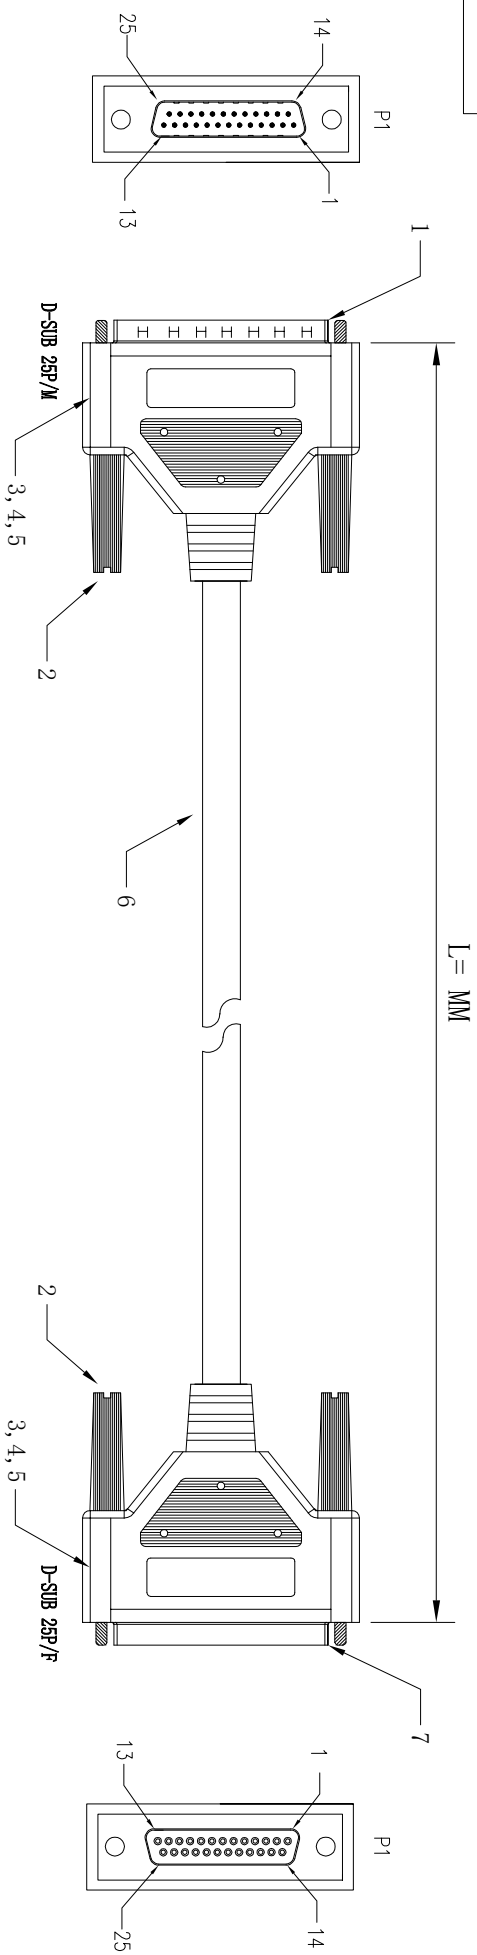

NOTES:

1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

PIN ASSIGNMENT

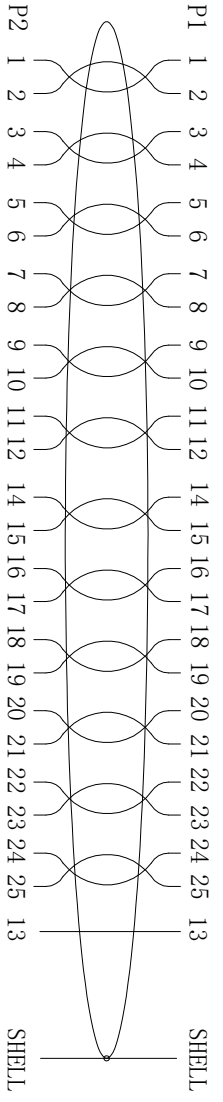

7	CONNECTOR	DB25Pin Female Solder	BLACK	TYPE	1PCS
6	CABLE	UL2919 28AWG*13P+4ED	PVC JACKET COLOR:BLACK	OD= 7.5mm	1PCS
5	COPPER FOIL	COPPER FOIL W=25MM			NA
4	OVERMOLD	4SP PVC COLDR: BLACK			NA
3	MOLD	PE			NA
2	SCREW	SCREW 4-40# Ni (E33BK)			4PCS
1	CONNECTOR	DB25Pin Male Solder	BLACK	TYPE	1PCS
ITEM	PART NAME	DESCRIPTION			QY'T

QUALITY SYMBOLS

□: CRITICAL
 ✖: MAJOR
 ∇: ZERO DEFECT S.P.C

Tolerance

R±(CM)	A±(CM)
30~200	±10
201~500	±20
501~	±30

NAME: D-SUB 25P Male To 25P Female Cable
 REV: A
 UNIT: mm
 SCALE: NONE
 DATE: 2018/05/24

DRW BY: KING ZHOU
 CHK BY: DAWN HU
 APP BY: KING ZHOU

PART NO.: A05-02531XXX-01
 DRAWING NO.: A05-025

NAME:	D-SUB 25P Male To 25P Female Cable	PART NO.:	A05-02531XXX-01
REV:	A	UNIT:	mm
SCALE:	NONE	DATE:	2018/05/24
DATE:	2018/05/24	DAWN HU	KING ZHOU
APP BY:	KING ZHOU	APP BY:	KING ZHOU
DRAWING NO.:	A05-025	DRAWING NO.:	A05-025

东莞市箐国电子有限公司

DATE	2018/05/24	DESCRIPTION	新版发行	APPROVER	Jack Chen
SIDE	8	DATE	7	DESCRIPTION	6

QUALITY SYMBOLS

□: CRITICAL
 ✖: MAJOR
 ∇: ZERO DEFECT S.P.C

Tolerance

R±(CM)	A±(CM)
30~200	±10
201~500	±20
501~	±30

NAME: D-SUB 25P Male To 25P Female Cable
 REV: A
 UNIT: mm
 SCALE: NONE
 DATE: 2018/05/24

DRW BY: KING ZHOU
 CHK BY: DAWN HU
 APP BY: KING ZHOU

PART NO.: A05-02531XXX-01
 DRAWING NO.: A05-025

东莞市箐国电子有限公司