

8

7

6

5


4

3


2

1

L

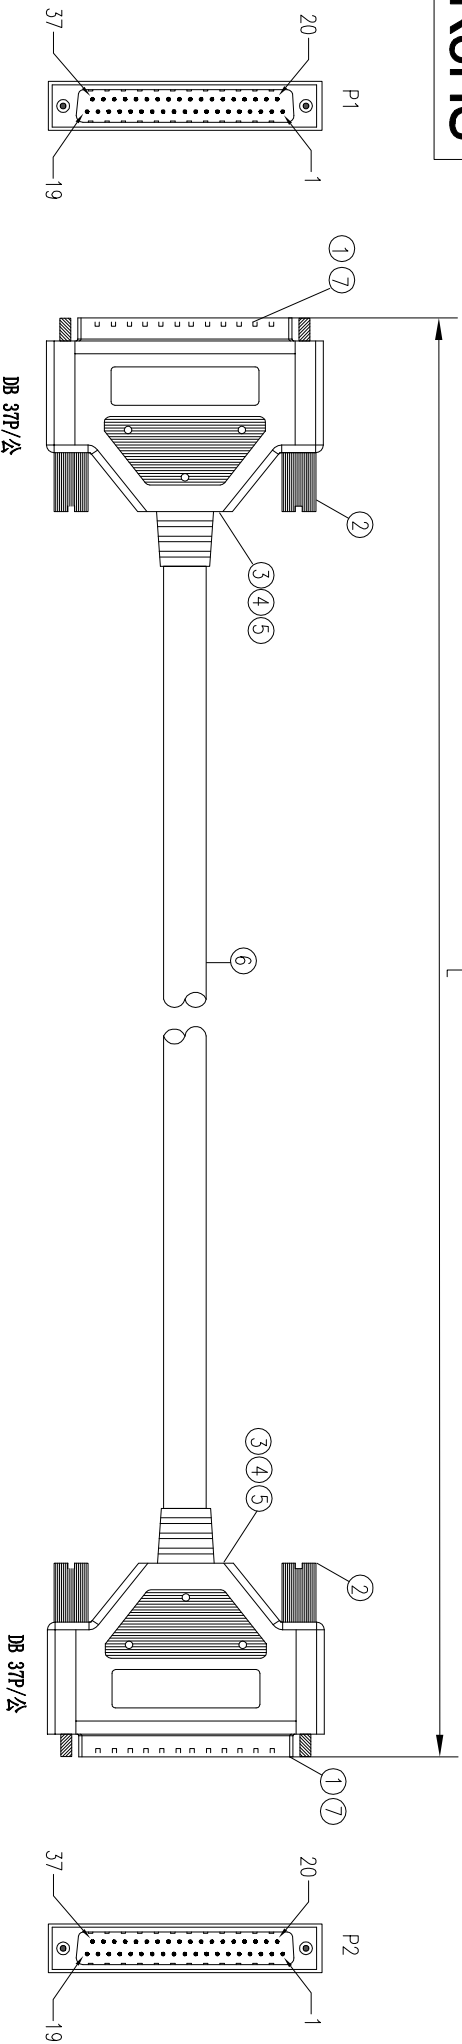

PIN ASSIGNMENT

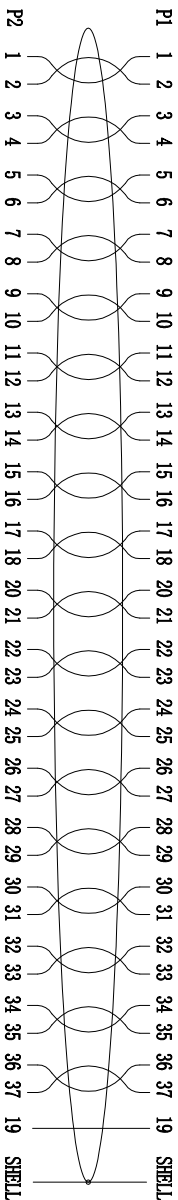

NOTES:

1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

7	DUST COVER	37Pin DUST COVER PE	UL20276 28AWG*18P+28AWG*1C+AEED	2PCS
6	CABLE	PVC JACKET COLOR:BLACK OD=8.0mm		1PCS
5	COPPER FOIL	COPPER FOIL W=25MM		NA
4	DVERMOLD	50P PVC COLOR: BLACK		NA
3	MOLD	PE		NA
2	SCREW	SCREW 4-40# Ni(Cr E33 BK)		4PCS
1	CONNECTOR	D-SUB 37Pin Male Solder TYPE		2PCS
ITEM	PART NAME	DESCRIPTION		QY'T

QUALITY SYMBOLS

□: MAJOR

△: CRITICAL

▽: ZERO DEFECT

◇: S.P.C

Tolerance

R±(CM) A±(CM)

30~200 ±10

201~500 ±20

501~ ±30

NAME: D-SUB 37P Male To 37P Male Cobble PART NO. A05-03711XXX-01

REV: A UNIT: mm DRAW BY CHK BY APP BY DRAWING NO. A05-037

SCALE: NONE DATE: 2018/01/06 DAWN HU KING ZHOU

东莞市箐国电子有限公司

8	7	6	5	4	3	2	1
△							
△							
△	2018/01/06	新版发行	Jack Chen				
△	DATE	DESCRIPTION	APPROVER				
8	7	6	5	4	3	2	1