



RoHS

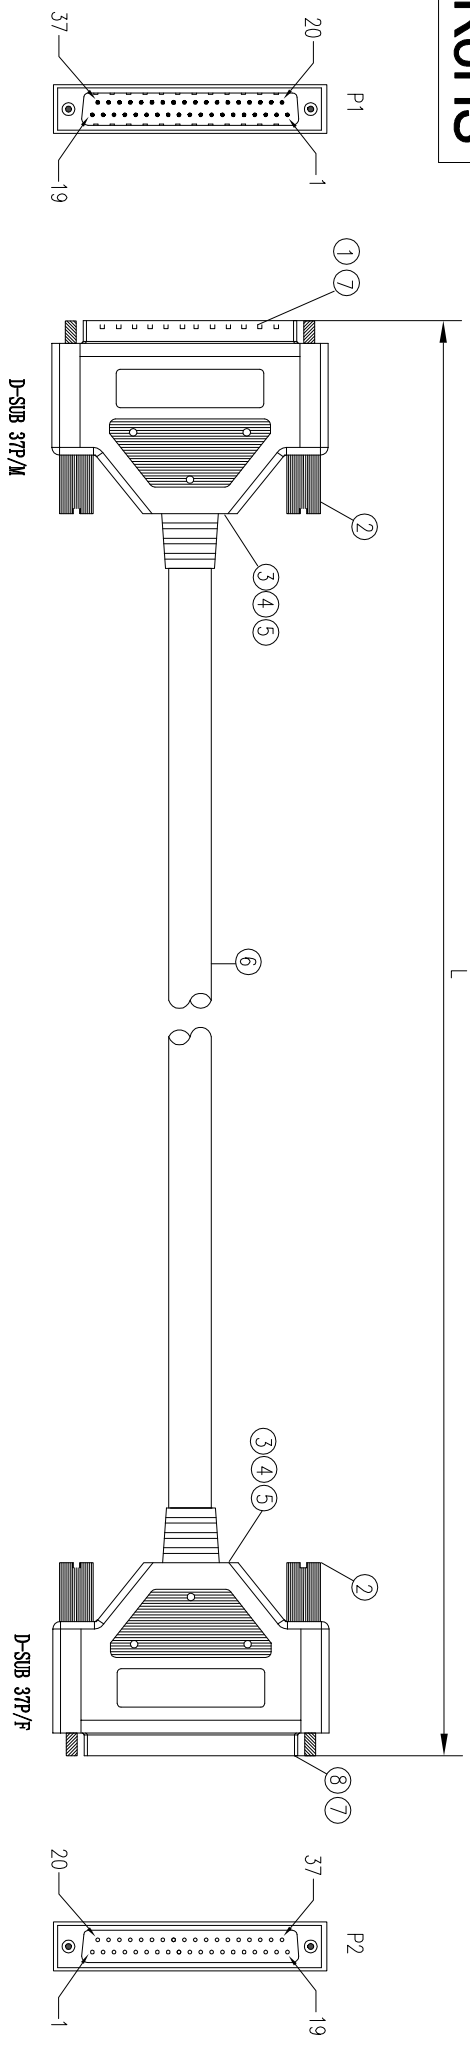

PIN ASSIGNMENT

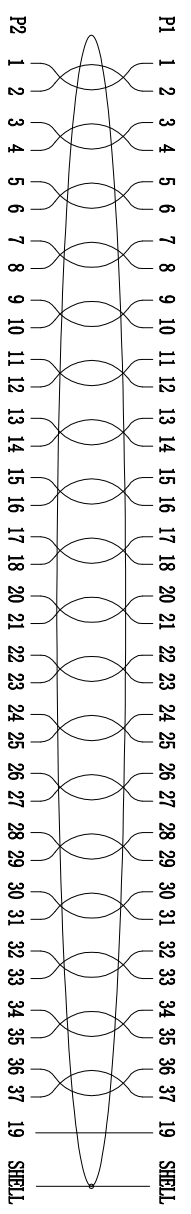

- NOTES:
1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
 2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
 3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
 4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

8	CONNECTOR	D-SUB 37Pin Female Solder TYPE	1PCS
7	DUST COVER	37Pin DUST COVER PE	2PCS
6	CABLE	UL20276 28AWG*18P+28AWG*1C+AE PVC JACKET COLOR:BLACK OD=8.0mm	1PCS
5	COPPER FOIL	COPPER FOIL W=25MM	NA
4	OVERMOLD	SOP PVC COLDR: BLACK	NA
3	MOLD	PE	NA
2	SCREW	SCREW 4-40# Ni(Cr E33 BK)	4PCS
1	CONNECTOR	D-SUB 37Pin Male Solder TYPE	1PCS
	ITEM	PART NAME DESCRIPTION	QTY

QUALITY SYMBOLS

□ : :

CRITICAL MAJOR

ZERO DEFECT S.P.C

Tolerance

R±(CM) A±(CM)

30~200 ±10

201~500 ±20

501~ ±30

NAME: D-SUB 37P Male To 37P Female Cable (客户用图) PART NO. A05-03731XXX-01

REV: A UNIT: mm DRW BY CHK BY APP BY DRAWING NO.

SCALE: NONE DATE: 2018/01/06 DAWN HU KING ZHOU A05-015

东莞市箐国电子有限公司

8	7	6	5	4	3	2	1
DATE	DESCRIPTION	APPROVER	ZERO DEFECT S.P.C				
2018/01/06	新版发行	Jack Chen					
SIDE							