

- NOTES:**
- ELECTRICAL AND MECHANICAL PERFORMANCE SHOULD MEET THE PCIe GEN4 INDUSTRIAL STANDARD.
电气和机械特性满足PCIe GEN4工业标准.
 - THE CABLE ASSEMBLY SHOULD BE RoHS COMPLIANT.
该产品符合RoHS.
 - THE CABLE ASSEMBLY SHALL MEET BELOW IMPEDANCE REQUIREMENT:
TERMINATION AREA: $85 \pm 15\%$ OHMS, CABLE ABSOLUTE AREA: $85 \pm 10\%$ OHMS.
该产品满足下面阻抗特性: 接触区域 $85 \pm 15\%$ 欧姆, 线材为 $85 \pm 10\%$ 欧姆.

7	7215148111	DIST COVER:HR SLMSSS 81, WHITE	2	PCS
6	605040426	EXPANDO TUBE: 0D-8mm, BLACK, W-1, HF	A/R	MM
5	605011152	Polyester tape: T=0.12mm, W=30mm, BLACK, RHTS	A/R	MM
4	74151XXXXX	SLMSSS 81 85Ω STR	1	PCS
3	74151XXXXX	SLMSSS 81 85Ω STR	1	PCS
2	603020059	F CBL: UL2678, 30AWG, 5C, PH: 0.635mm, 1/0.254	A/R	MM
1	603010225	SAS CBL: UL20744*30#*2C+2EAM, SILVER, 85Ω, W-1, BL, UE, HF, 16G	A/R	MM
ITEM	P/N	DESCRIPTION	QTY	UNIT

NAME:	SFP-8654 SLMSSAS (x8) 防斜插 CABLE L-0.8M	PART NO.	A35-07400576-01
REV:	A	UNIT:	mm
SCALE:	N:1	DATE:	2022/09/10
		DAW NHU	KING ZHOU

QUALITY SYMBOLS	□ :	MAJOR
	▽ :	ZERO DEFECT S.P.C

Tolerance	x:	±0.50
	.x	±0.30
	.xx	±0.15




△				
△	2022/09/10	新版发行	King Zhou	
A	SIDE	DATE	DESCRIPTION	APPROVER
	8	7	6	5

东莞市箐国电子有限公司

REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2022/09/10	DAW NHU	KING ZHOU		A35-074

Connection relationship:

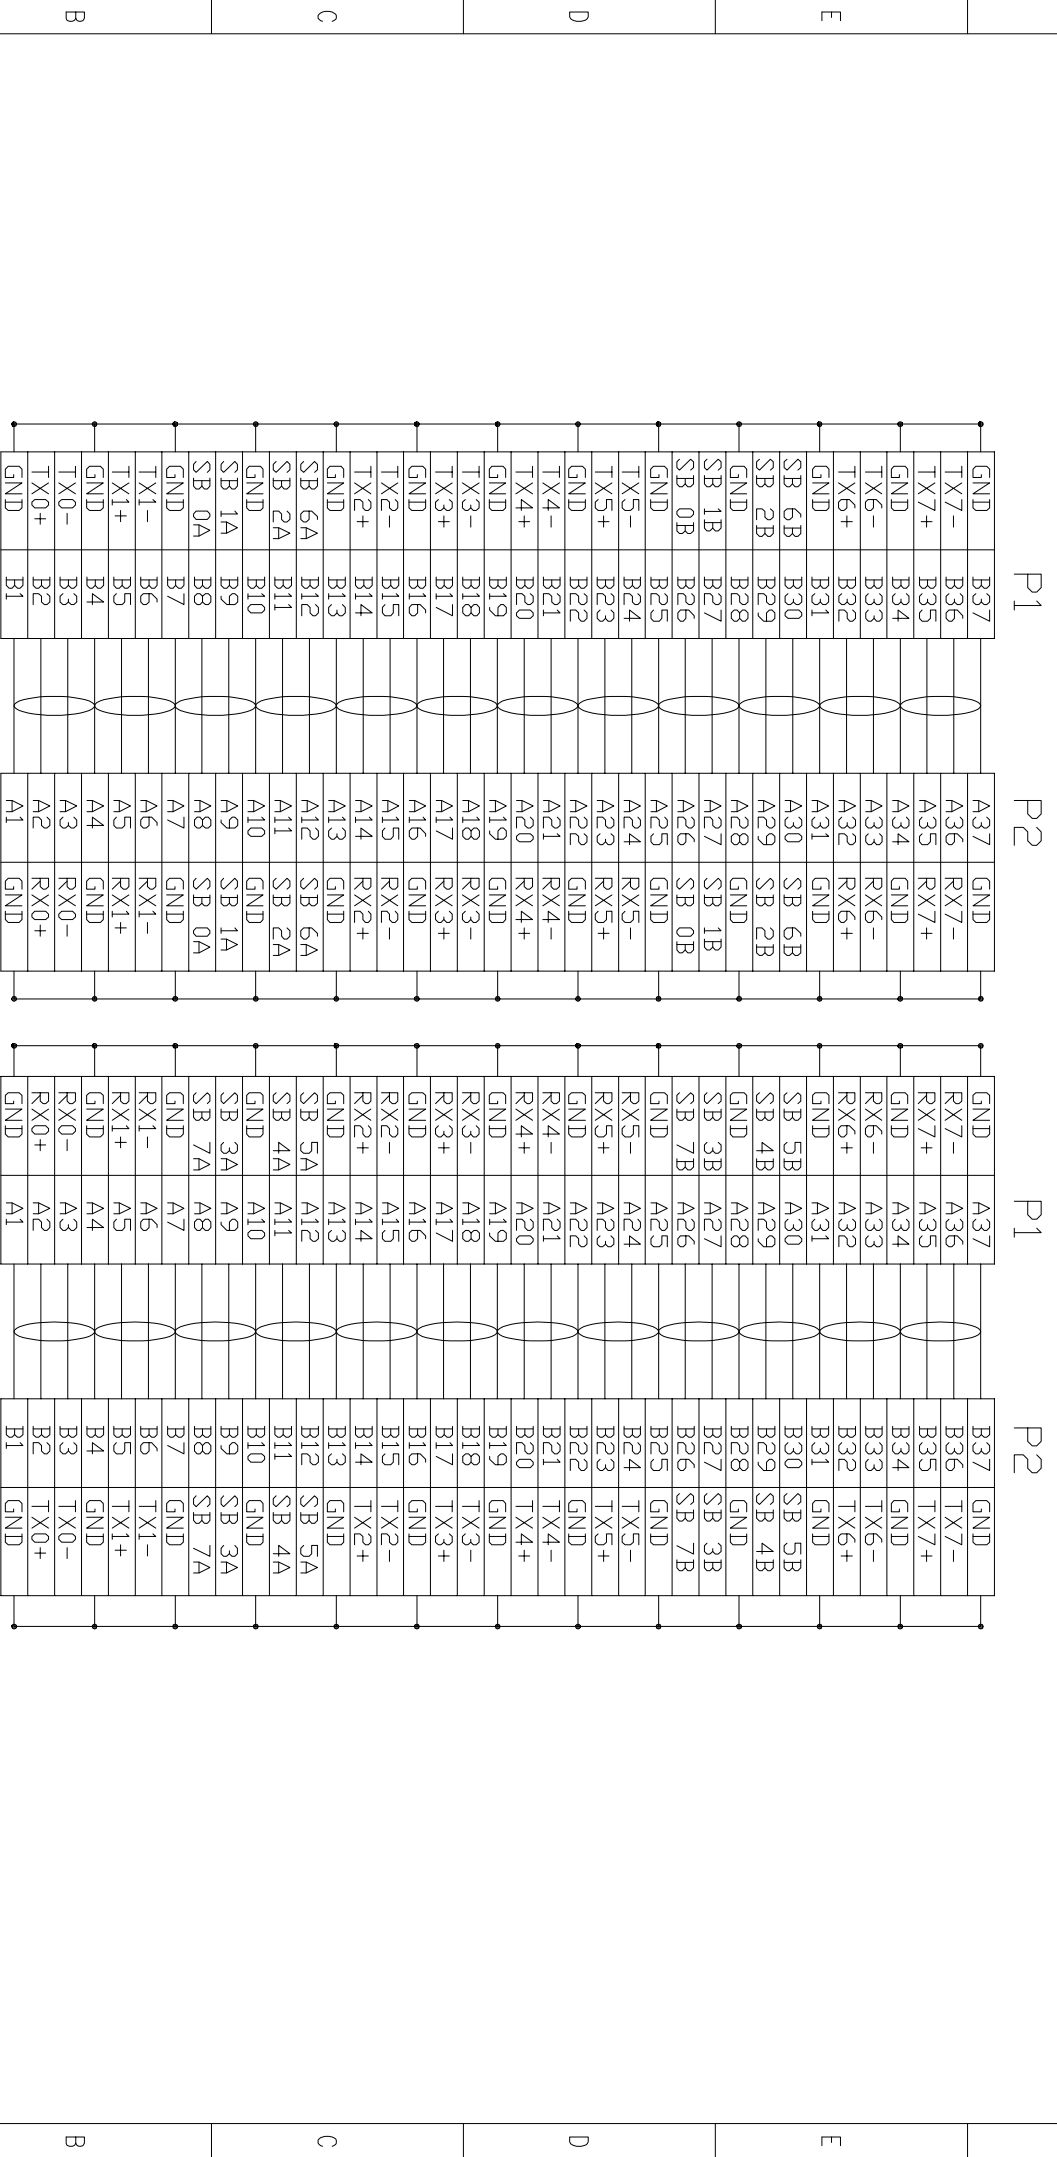

A		B		C		D		E		F		
△		QUALITY SYMBOLS										
△		□ :	⊠ :	Tolerance								
△	2022/09/10	CRITICAL	MAJOR	x.	±0.50	NAME: SFF-8654 SLM5MS (x8) 防鎖插 CABLE L=0.8M						PART NO. A35-07400576-01
△	2022/09/10	King Zhou	King Zhou	x	±0.30	REV: A	UNIT: mm	DRW BY: DAW NHU	CHK BY: KING ZHOU	APP BY:	DRAWING NO. A35-074	
△	2022/09/10	新版发行	King Zhou	.xx	±0.15	SCALE: N:1	DATE: 2022/09/10	DAW NHU	KING ZHOU	APP BY:	DRAWING NO. A35-074	
SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT	S.P.C	东莞市箐围电子有限公司						
8				5		4		3		2	1	