


3D VIEW

Voltage Current Rating: 0.5 AMP.
 Dielectric Withstanding Voltage: AC350V (r.m.s)
 Contact Resistance: 100 mΩ Max.
 Insulation Resistance: DC25V 500MΩ Min.
 Temperature Range: -40°C to +85°C

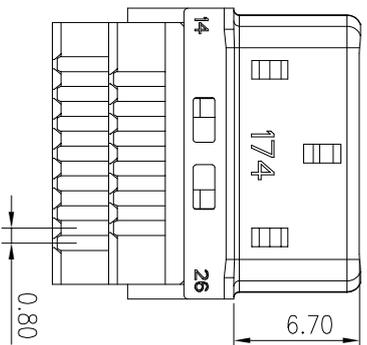

E	LONG CONTACT	13	C2680-EH T=0.30mm	GOLD FLASH ALU31 ON CONTACTS 100U/TIN PLATING ON SOLDER TAILS 80U/TIN OVER NICKEL PLATING.
D	SHORT CONTACT	13		
C	SHELL	1	SPCC T=0.30mm	Ni 80u Min
B	COVER	1	LCP+15%GF UL94-V0	BLACK
A	INSULATOR	1	LCP+15%GF UL94-V0	BLACK
NO.	MATERIAL	QTY	MATERIAL	PLATING & COLOR

QUALITY SYMBOLS

□ : MAJOR

△ : CRITICAL

▽ : ZERO DEFECT

S.P.C

NAME: SDR-26P Male Solder Connector PART NO. B06-026111AA-01

REV: A UNIT: mm DRW BY: CHK BY: APP BY: DRAWING NO. B01-009

SCALE: N:1 DATE: 2018/01/09 JING LI JACK CHEN

APPROVER: JACK CHEN

东莞市箐国电子有限公司

8	7	6	5	4	3	2	1
DATE	DESCRIPTION	APPROVER	ZERO DEFECT	Tolerance	SCALE	DATE	JACK CHEN
2018/01/09	新版发行	JACK CHEN	S.P.C	±0.80 ±0.50 ±0.30	N:1	2018/01/09	JACK CHEN
8	7	6	5	4	3	2	1