


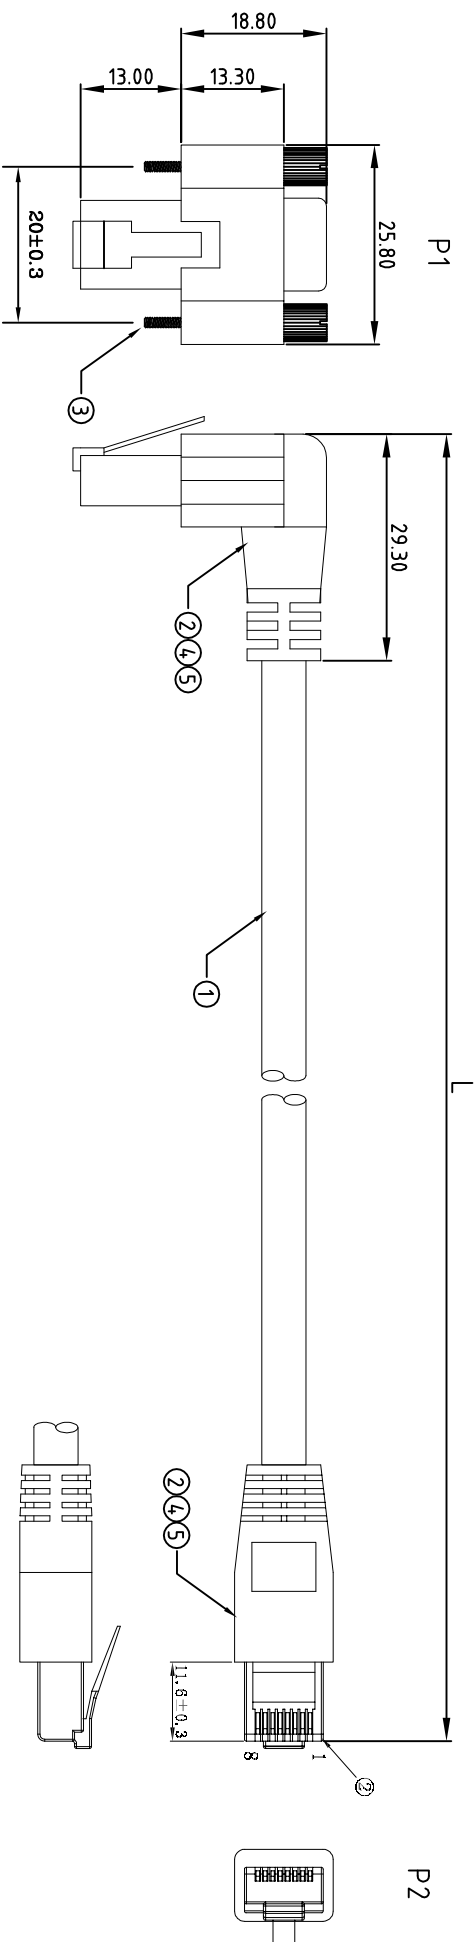

PIN ASSIGNMENT

P1		P2
ORANGE/WHITE		1
1		2
2		3
GREEN/WHITE		6
3		4
6		5
BLUE		7
4		8
5		SHELL
BLUE/WHITE		
BROWN/WHITE		
7		
8		
BRAID		
SHELL		

Length and Part number:

No	Part No:	Length (mm)
1	A15-080M1210-2.0M	2000±30
2	A15-080M1210-3.0M	3000±35
3	A15-080M1210-5.0M	5000±50
5	A15-080M1210-8.0M	8000±100
6	A15-080M1210-10.0M	10000±150

- NOTES:
1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
 2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
 3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
 4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY

5	PE	PE	NA
4	OVERMOLD	BLACK PVC 45P	NA
3	SCREW	M2.0*0.4 Steel,Ni plating.	2PCS
2	CONN	RJ45 CONNECTOR,8P8C,WITH SHELL	2PCS
1	CABLE	CAT 5E 24AWG*4P SFTP,JACKET:PVC COLOR: Green, OD= 6.5mm	1PCS
ITEM	PART NAME	DESCRIPTION	QTY

PART NAME:	CAT 5E Industrial Camera Cable	PART NO:	A15-080M1210-xxM
------------	--------------------------------	----------	------------------

						DRAWING NO.
		QUALITY SYMBOLS	Tolerance	REV:	A	UNIT: mm
					DRW BY	CHK BY
					APP BY	

	☐	☒	X.	± 0.60	SCALE:	N:1	DATE:	2024/03/22	Huangmei	Jack Chen	A15-080
--	--------------------------	-------------------------------------	----	------------	--------	-----	-------	------------	----------	-----------	---------

A			Critical WIP:	.X EUC: 40
Δ	NEW ISSUE	Jack Chen	MJOR V:	.XX ±0.25
	2024/03/22			



Kinkuo 东莞市肇宇电子有限公司

SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT S.P.C	
					www.kinku.co.uk