
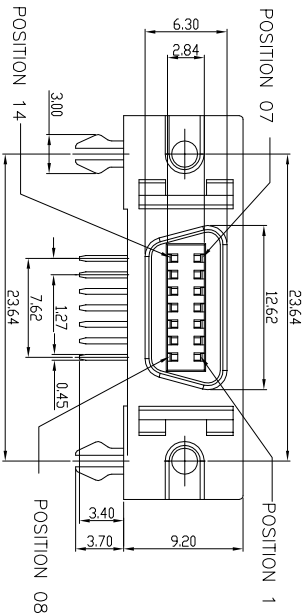
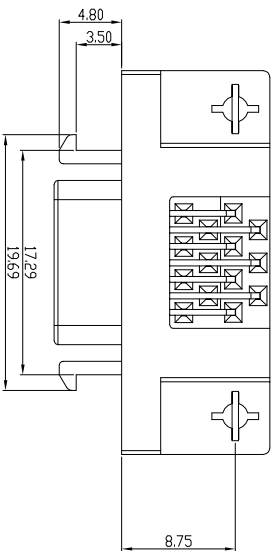


- ELECTRICAL CHARACTERISTICS:
 - CONTACT RATING:30 VAC
 - CONTACT CURRENT RATING:0.5A
 - DIELECTRIC WITHSTANDING VOLTAGE:500V AC FOR 60S.
 - INSULATION RESISTANCE 500mΩ MIN INITIAL
 - OPERATING TEMPERATURE:−45°C ~ 85°C

2. PLATING

- 2.1 TERMINAL:50u” MIN NICKEL ALL OVER
80u” MIN Tin ON SOLDER AREA
1u” GOLD ON CONTACT AREA
- 2.2 SHELL:100u”MIN.NICKEL OVER 50”MIN COPPER

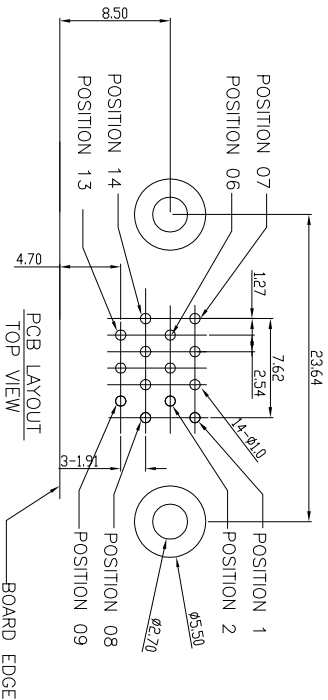

4	SHELL	ZINC ALLOY Ni Plated	1	pcs
3	CONTACT	COPPER ALLOY(T=0.30mm)	14	pcs
2	COVER	LCP BLACK UL94-V0	1	pcs
1	INSULATOR	PBT BLACK UL 94V-0	1	pcs
NO.	PART NAME	DESCRIPTION	QTY	UNIT

PART NAME:	SCSI MDR-14Pin Female Connector R/A For PCB	PART NO:	B03-014618A7-01
------------	---	----------	-----------------

Tolerance	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
.x. ±0.60	SCALE:	N:1	DATE:	2023/03/11	Huangmei	Jack Chen		B03-014
.x ±0.40								
.xx ±0.25								

QUALITY SYMBOLS

□ : CRITICAL

MAJOR

MINOR

S.P.C



东莞市箐国电子有限公司
www.kinkuo.com

www.kinkuo.com