
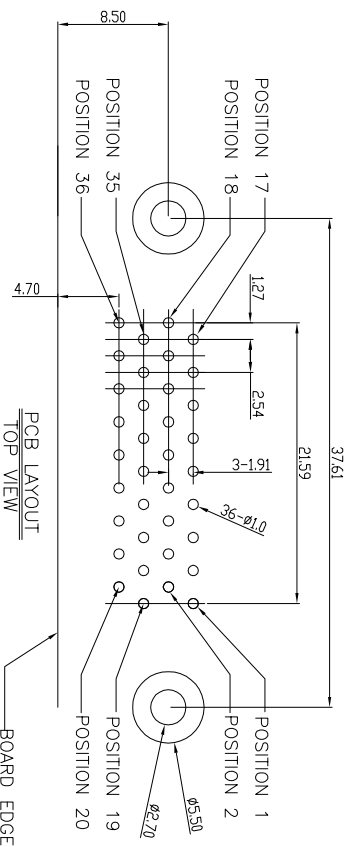

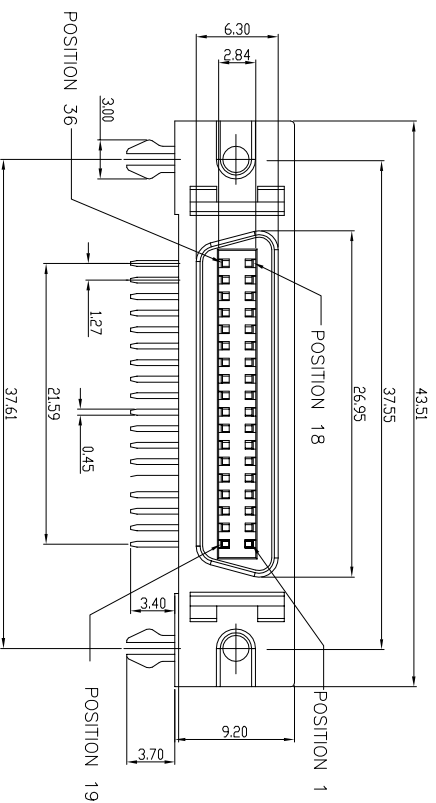


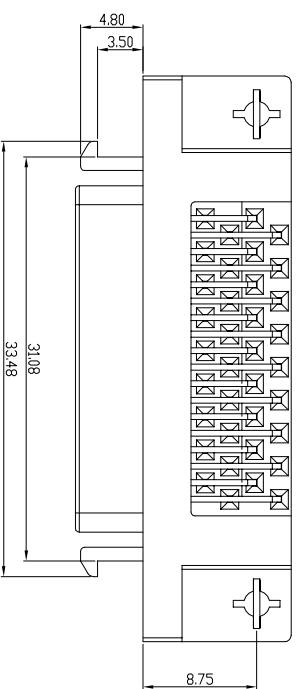

4	SHELL	ZINC ALLOY NI Plated	1	pcs
3	CONTACT	COPPER ALLOY(T=0.30mm)	36	pcs
2	COVER	LCP BLACK UL94-V0	1	pcs
1	INSULATOR	PBT BLACK UL 94V-0	1	pcs
NO.	PART NAME	DESCRIPTION	QTY	UNIT

PART NAME:		SCSI MDR-36Pin Female Connector R/A For PCB				PART NO:	B03-036618A7-01		
Tolerance	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
	SCALE:	N:1	DATE:	2023/03/11	Huangmei	Jock Chen			
	X.	±0.60							
	.x	±0.40							
.xx	±0.25								
									
东莞市箐国电子有限公司									
www.kinkuo.com									

1. ELECTRICAL CHARACTERISTICS;

- 1.1 CONTACT RATING:30 VAC
- 1.2 CONTACT CURRENT RATING:0.5A
- 1.3 DIELECTRIC WITHSTANDING VOLTAGE:500V AC FOR 60S.
- 1.4 INSULATION RESISTANCE 500MΩ MIN INITIAL
- 1.5 OPERATING TEMPERATURE:-45°C ~ 85°C

2. PLATING

- 2.1 TERMINAL:50u" MIN NICKEL ALL OVER
80u" MIN Tin ON SOLDER AREA
1u" GOLD ON CONTACT AREA
- 2.2 SHELL:100u"MIN.NICKEL OVER 50"MIN COPPER