


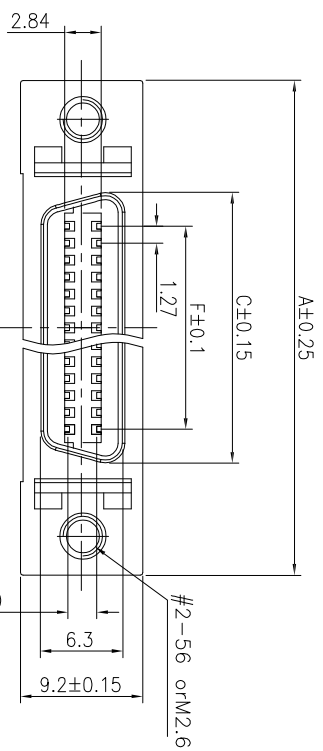

ELECTRICAL CHARACTERISTICS

Contact Current Rating: 1 Amp



Dielectric Withstanding Voltage: 500V AC

Insulation Resistance: 500M Ω /Min

Contact Resistance: $35\text{m}\Omega/\text{Max}$

Operation Temperature: $-45^{\circ}\text{C} \sim +85^{\circ}\text{C}$

No. of Pin	DIME NSIONS					
	A	B	C	D	E	F
14	29.51	23.64	12.60	17.25	23.64	7.62
20	33.32	27.45	16.43	21.06	27.45	11.43
26	37.13	31.26	20.24	24.76	31.26	15.24
36	43.48	37.61	26.50	31.11	37.61	21.59
40	46.08	40.15	29.14	33.30	40.15	24.13
50	52.37	46.50	35.39	40.00	46.50	30.48
68	64.00	57.92	46.90	51.00	57.92	41.91
100	84.18	78.23	67.14	71.50	78.23	62.23

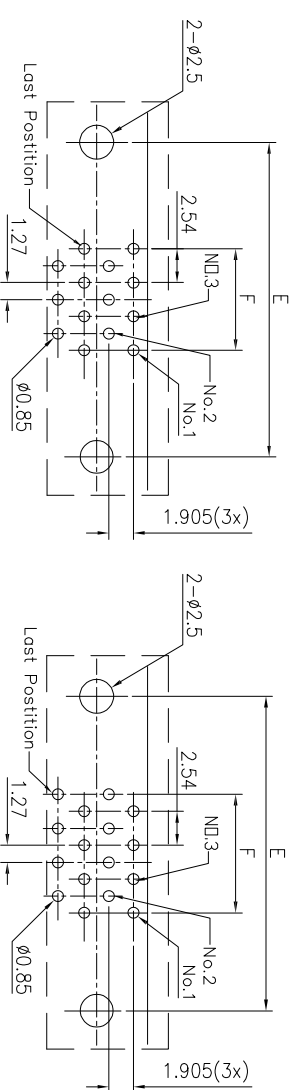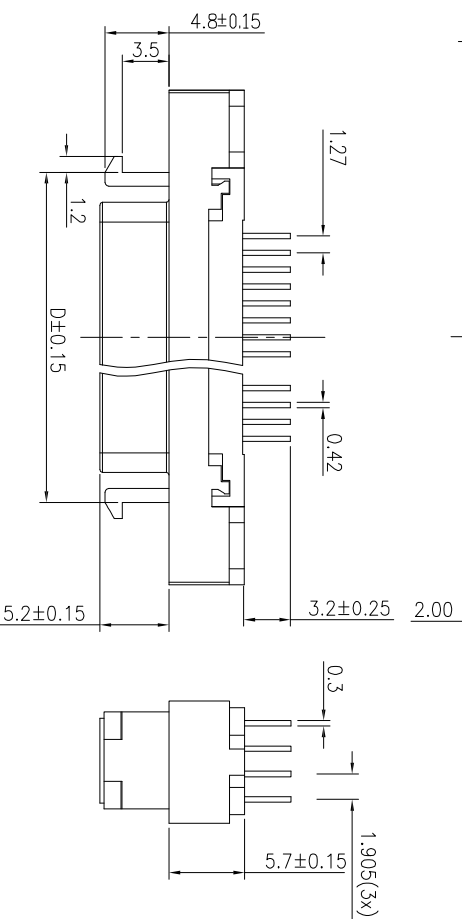


Part No.:

B03-XXX818CB-01

PCB Layout
(14, 26, 50POS)

PCB Layout
(20,36,40,68,100POS)

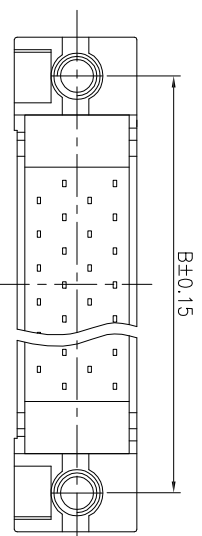

—No.of Pin: 014: 14Pin

100: 100Pin

3	SHELL	ZINC ALLOY	PALTING:NI	1	pcs
2	HOUSING	PBT+30%GF	COLOR:BLACK	2	pcs
1	TERMINAL	COPPER ALLOY	CONTACT PALTING:Au G/F, SOLDER PALTING:NI	XX	pcs
NO.	PART NAME	DESCRIPTION	REMARKS	QTY	UNIT

PART NAME:	SCSI MDR Female Connector V/T DIP Type
------------	--

PART NO:	B03-XXX818CB-01
----------	-----------------

			QUALITY SYMBOLS				Tolerance	
			☐ :	☒ :			X.	±0.60
			CRITICAL		MAJOR		.X	±0.40
			☒ :	☒ :			.xx	±0.25
			ZERO DEFECT		S.P.C		 	
A	A	2023/03/11	NEW ISSUE		Jack Chen			
REV	DATE		DESCRIPTION		APPROVER			



东莞市箐国电子有限公司

www.kinkuo.com

REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO. B03-818
SCALE:	N:1	DATE:	2023/03/11	Huangmei	Jack Chen		