
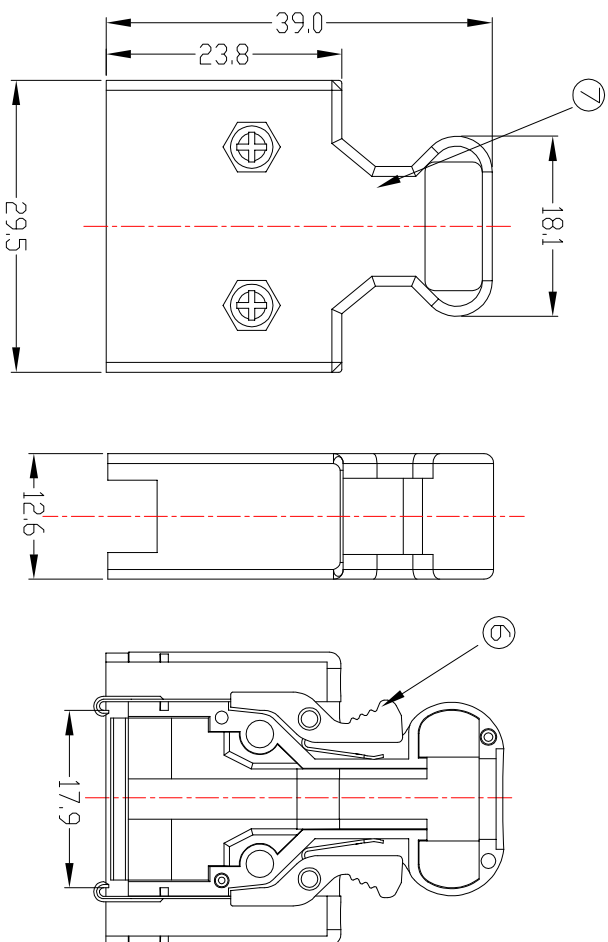
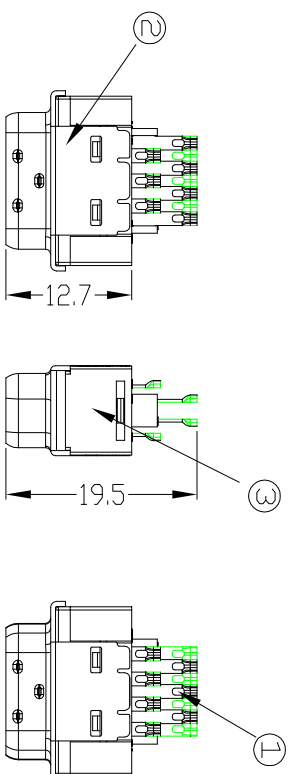
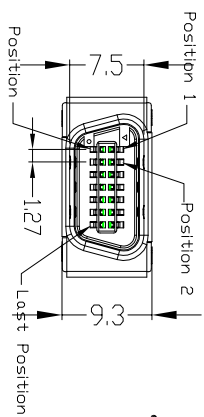
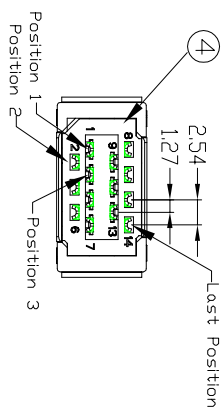




ELECTRICAL CHARACTERISTICS

Contact Current Rating: 1 Amp
Dielectric Withstanding Voltage: 500V AC
Insulation Resistance: 500MΩ/Min
Contact Resistance: 35mΩ/Max
Operation Temperature: -55°C ~ +105°C

7	HOOD	PBT+30%GF	COLOR: BLACK
6	LATCH	ABS,SUS304	COLOR: BLACK
5	CLAMP	STEEL	PLATING: MATTE TIN AND NI
4	COVER	PBT+30%GF	COLOR: BLACK
3	HOUSING	PBT+30%GF	COLOR: BLACK
2	SHELL	SPCC	PLATING: NI
1	TERMINAL	COPPER ALLOY	CONTACT AREA: Au 3u" SOLDER AREA: G/F UNDER-PLATING: NI

QUALITY SYMBOLS

□: ☐ CRITICAL
✕: ☒ MAJOR
▽: ☐ ZERO DEFECT
S.P.C

Tolerance

X.	±0.80
.X	±0.50
.XX	±0.30

NAME: 3M同等品 SCSI 14P MALE SOLDER ASSEMBLY (客户用图)		PART NO. B01-01431132-01	
REV: A	UNIT: mm	DRW BY: CHK BY: APP BY:	DRAWING NO. B01-011
SCALE: N:1	DATE: 2009/06/04	DAW NHU	KING ZHOU

东莞市箐国电子有限公司

DATE	DESCRIPTION	APPROVER
2009/06/04	新版发行	King Zhou