

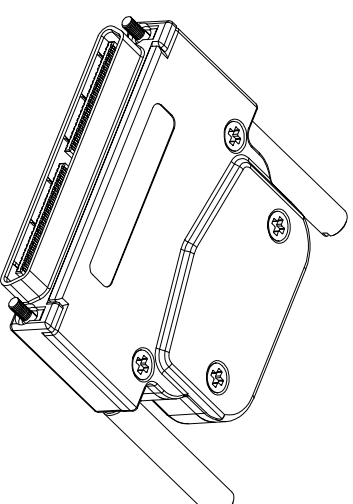
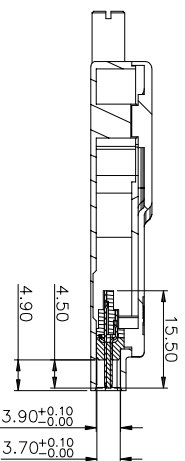
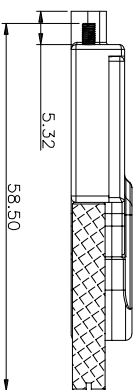
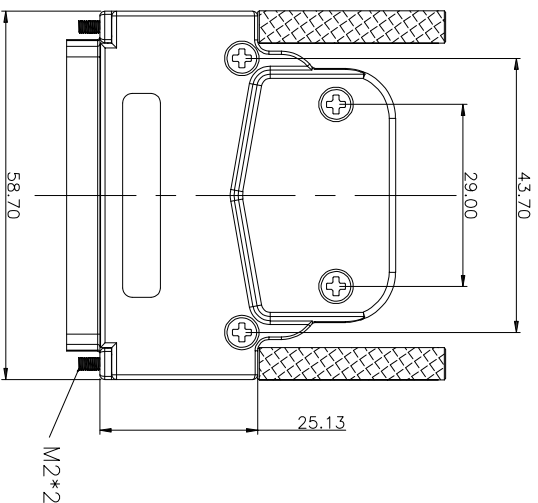


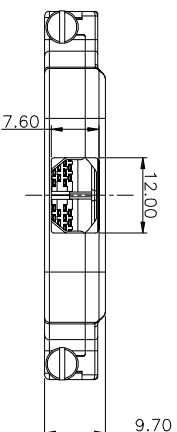


3D VIEW

SECTION:A-A

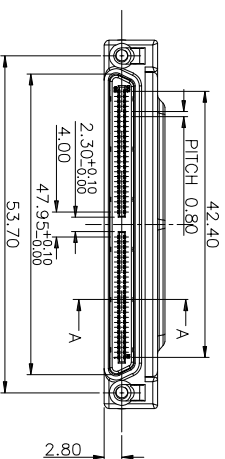

ELECTRICAL CHARACTERISTICS

Contact Current Rating: 0.3 Amp
Dielectric Withstanding Voltage: 500V AC
Insulation Resistance: 500M /Min
Contact Resistance: 35m /Max
Operaion Temperature: -45°C ~ + 85°C

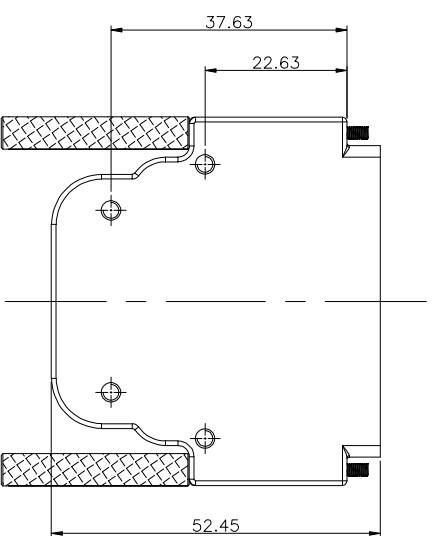

5	SCREW	STEEL	PLATED NI	
4	SHELL	ZINC ALLOY	PLATED NI	
3	HOUSING	PBT+30% UL 94-V0	COLOR:BLACK	
2	COVER	LCP+15% UL 94-V0	COLOR:BLACK	
1	TERMINAL	COPPER ALLOY	CONTACT AREA:G/F SOLDER AREA:Sn UNDER-PLATING:NI	

QUALITY SYMBOLS		NAME:		MATERIAL		REMARKS		PART REMARKS	
☐ : CRITICAL	☒ : MAJOR	Tolerance	NAME:	WHDCI-100Pin	Male Pitch=0.8mm	Connector	PART NO.	B06-100318AA-01	
☒ : ZERO DEFECT	☒ : S.P.C	xx	REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY
		x	SCALE:	NONE	DATE:	2017/04/21	DAW NHU	KING ZHOU	
		.xx							



东莞市箐国电子有限公司