
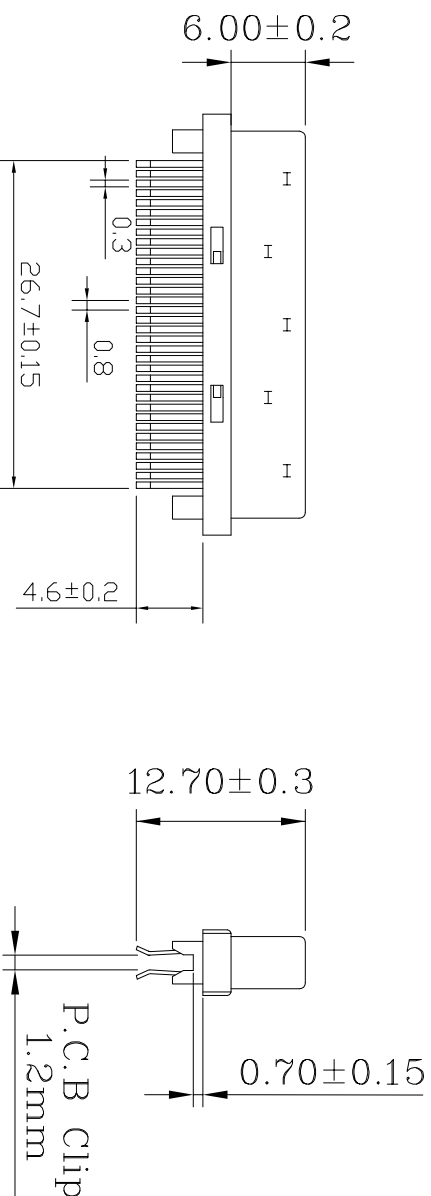


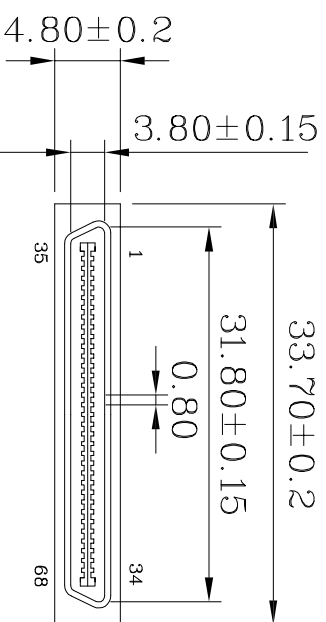

● ELECTRICAL CHARACTERISTICS:

Contact Current Rating: 0.5 Amp
 Dielectric Withstanding Voltage: 250V AC
 Insulation Resistance: >500M Ω /Min
 Contact Resistance: 35m Ω /Max
 Operation Temperature: -55°C ~ +85°C

3	HOUSING	PBT+30%GF	UL94V-0	
2	SHELL	STEEL	NICKEL PLATED OVER COPPER	
1	TERMINAL	PHOSPHOR BRONZE	GOLD SELECTIVE PLATED	
ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS

NAME:	VHDCI 68P Pitch 0.8mm FOR P.C.B Clip Molding Type	PART NO.	B06-068G11EN-01
-------	---	----------	-----------------

			QUALITY SYMBOLS		Tolerance		NAME: VHDCL 68P Pitch 0.8mm FOR P.C.B Clip		PART NO.		B06-068G11EN-01	
			☐ : ☒ :		X. ±0.50	REV: A	UNIT: mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
			CRITICAL MAJOR		.X ±0.30	SCALE: N:1	DATE: 2018/11/04	JINGLI	KING ZHOU		B05-017	
A	Δ	2022-3-30	NEW ISSUE	JINGLI	∇ : ∇ : ZERO DEFECT S.P.C	东莞市箐国电子有限公司						
SIDE	DATE	DESCRIPTION	APPROVER									