

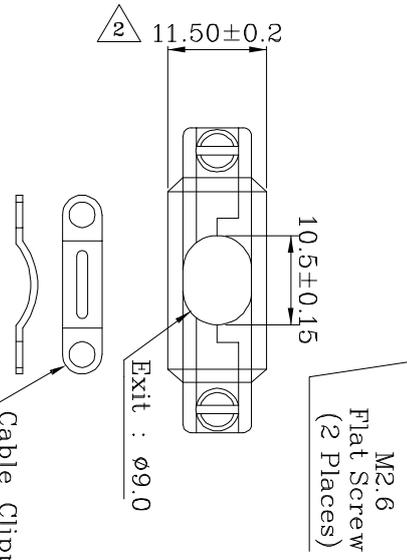
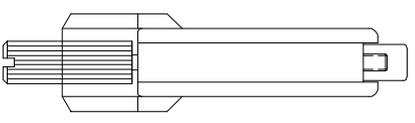
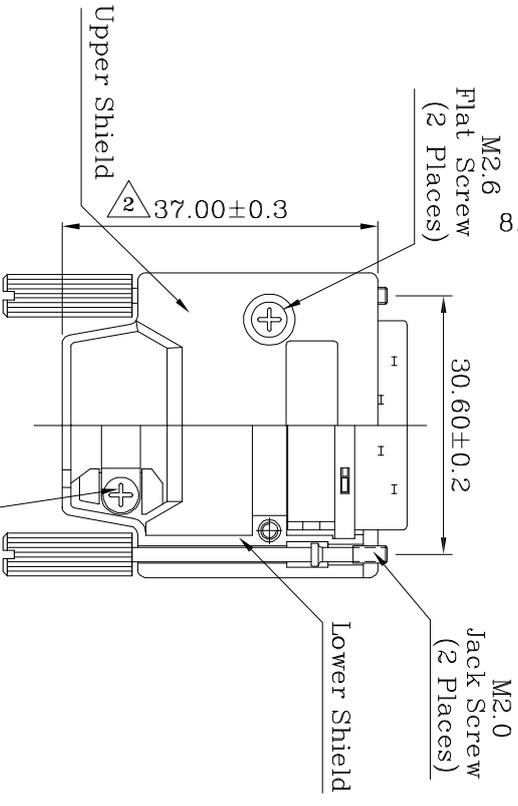
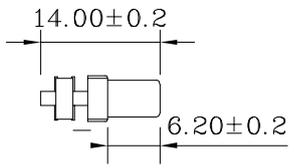
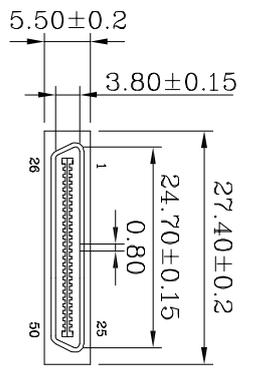


ROHS

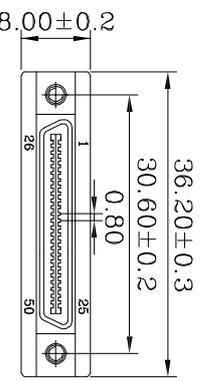

• ELECTRICAL CHARACTERISTICS:

Contact current rating: 1 Amp

Dielectric withstanding voltage: 250V AC

Insulation resistance: 500MΩ/Min

Contact resistance: 35mΩ/Max

Operation temperature: -55°C ~ +105°C

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO KinKuo INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN REMISSION.

QUALITY SYMBOLS
 ■ : CRITICAL
 □ : MAJOR
 ▽ : ZERO DEFECT S.P.C

UNIT: mm
 SCALE: 2:1
 TOLERANCES: DIM. ±0.10 ANGLE: ±1°

NO.	MATERIAL	QTY	MATERIAL	PLATING & COLOR
I	SHIELD	2	zinc alloy	Ni: 80U ³ /Min
H	CABLE CLIPPER	1	SPCC T=0.80mm	Ni: 80U ³ /Min
G	FLAT SOREW	2	SPCC	Ni: 80U ³ /Min
F	FLAT SOREW	4	SPCC	Ni: 80U ³ /Min
E	LONG CONTACT	34	C2680-EH T=0.30mm	99.0% FLASH, 150 ³ ON CONTACT AREA, 1000 ³ TIN PLATING ON SOLDER TAILS, 800 ³ NiL OVER MODEL PLATING.
D	SHORT CONTACT	34		
C	SHELL	1	SPCC T=0.30mm	Ni: 80U ³ /Min
B	COVER	1	LCP+15%GF UL94-V0	BLACK
A	INSULATOR	1	PBT+30%GF UL94-V0	BLACK

REV	DESCRIPTION	DATE	ZERO DEFECT S.P.C	APPROVED	CHECKED	DESIGN	DRAWN	PART NO.	DESCRIPTION	VHDCI-50P Male Connector Pitch=0.8mm IDC Type	REV
A	圖面發行	2017-12-12						B06-050111A0-02			A
8											
7											
6											
5											
4											
3											
2											
1											

东莞市箐国电子有限公司