
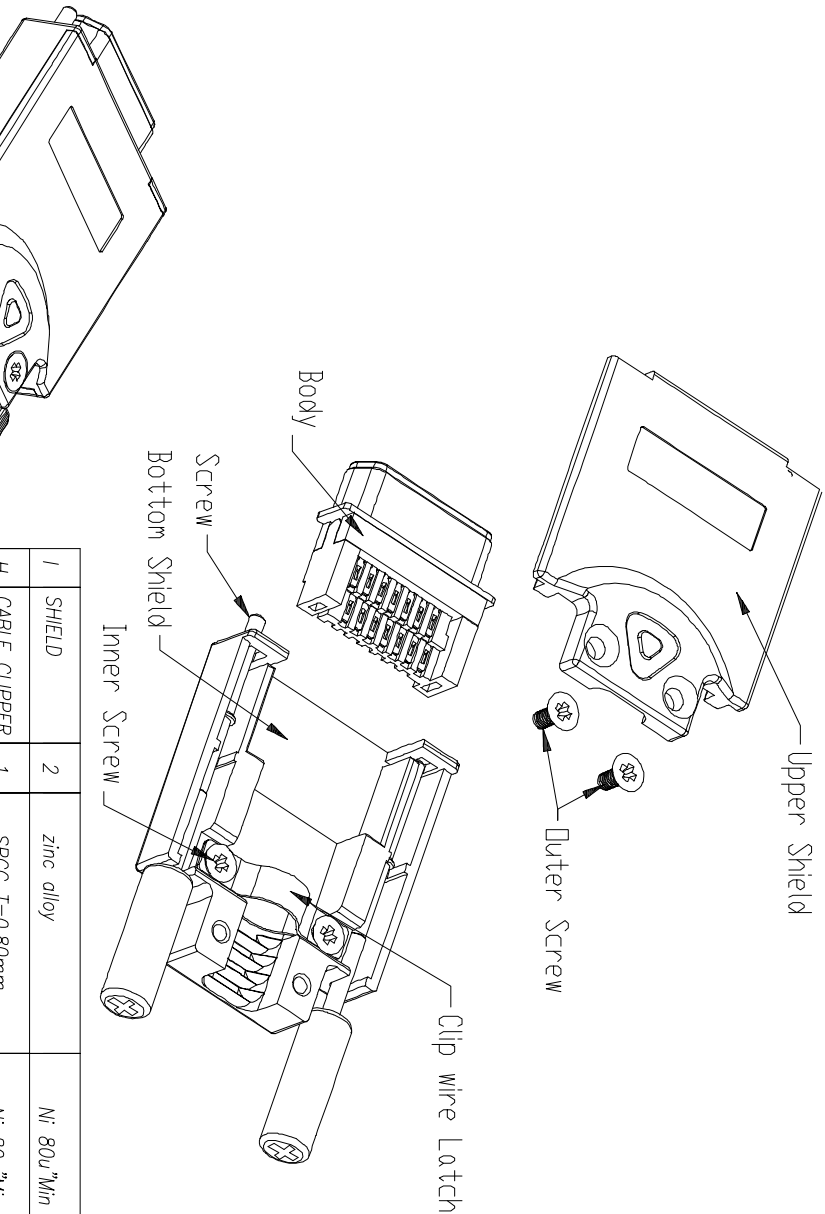


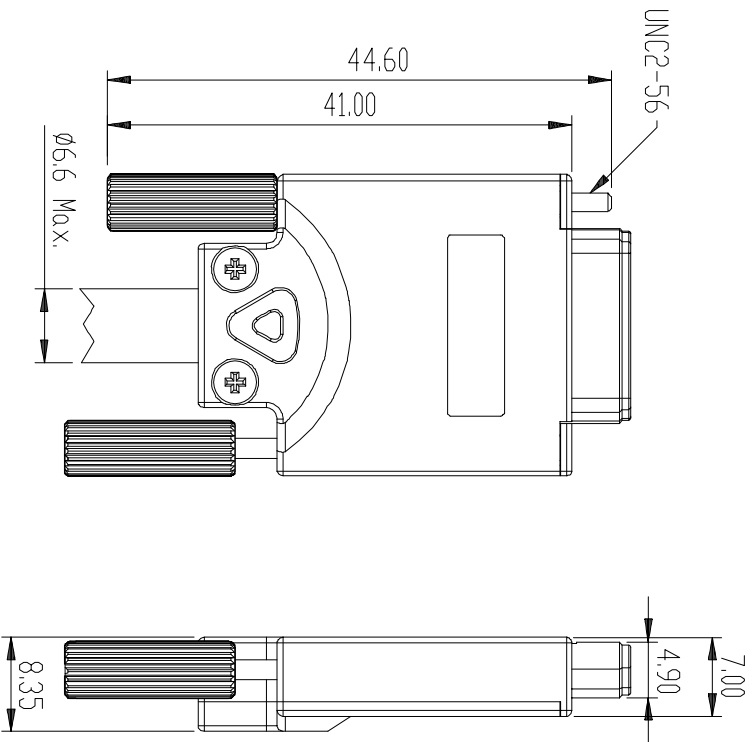

Voltage Current Rating: 0.3 AMP.
Dielectric Withstanding Voltage: 250V AC
Contact Resistance: 100 mΩ Max.
Insulation Resistance: 500MΩ Min.
Temperature Range: -20°C to +85°C

I	SHIELD	2	zinc alloy	Ni: 80u"Min
H	CABLE CLIPPER	1	SPCC T=0.80mm	Ni: 80u"Min
G	FLAT SOREW	2	SPCC	Ni: 80u"Min
F	FLAT SOREW	4	SPCC	Ni: 80u"Min
E	LONG CONTACT	13	C2680-EH T=0.30mm	GOLD FLASH ALU3U" ON CONTACT AREA 100U"TN PLATING ON SOLDER TAILS. 80U"NiL OVER NICKEL PLATING.
D	SHORT CONTACT	13		
C	SHELL	1	SPCC T=0.30mm	
B	COVER	1	LCP+15%GF UL94-V0	BLACK
A	INSULATOR	1	LCP+15%GF UL94-V0	BLACK
NO.	MATERIAL	QTY	MATERIAL	PLATING & COLOR

NAME:		SDR-28P Male Solder Type Pitch=0.8mm		PART NO.		B06-028111AA-02	
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2022/03/09	JING LI	JACK CHEN		B06-028

东莞市箐国电子有限公司

Tolerance		QUALITY SYMBOLS	
x.	±0.80	□:	
x	±0.50	⊠:	
.xx	±0.30	CRITICAL	MAJOR
⊕:		ZERO DEFECT	S.P.C
⊖:			

DATE	DESCRIPTION	APPROVER
2022/03/09	新版发行	JACK CHEN

SIDE	8
------	---