


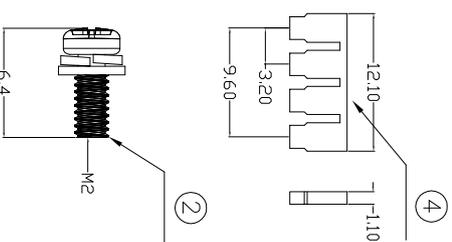
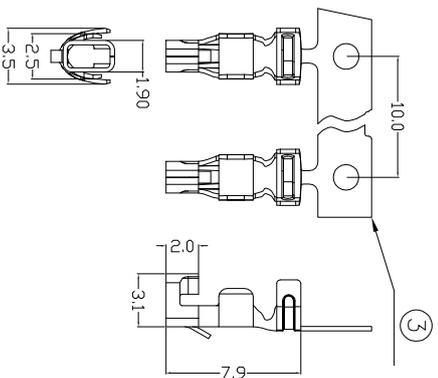
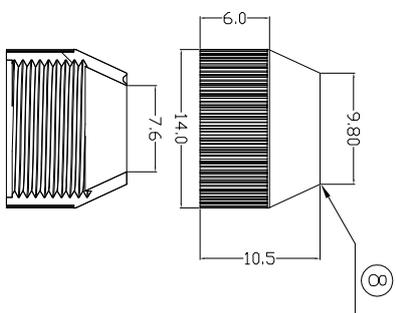


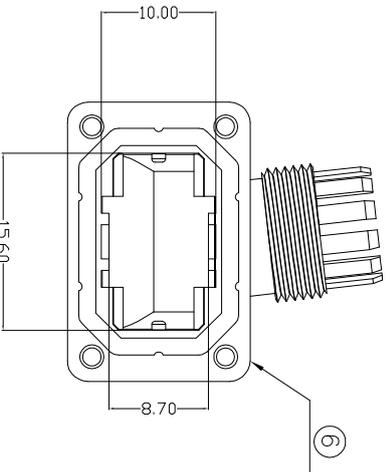
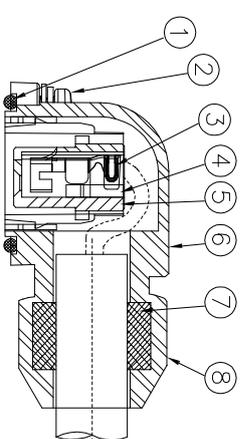






ROHS COMPLIANT



Voltage Current Rating: 5 AMP.
 Dielectric Withstanding Voltage: 500V AC
 Contact Resistance: 30 m Ω Max.
 Insulation Resistance: 500M Ω Min.
 Temperature Range: -20°C to +85°C


ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS
8	GLAND NUT	SYNTHETIC RESIN	COLOR: BLACK	1PCS
7	BUSHING	SYNTHETIC RESIN	COLOR: BLACK	1PCS
6	HOOD	SYNTHETIC RESIN	COLOR: BLACK	1PCS
5	SOCKET INSULATOR	SYNTHETIC RESIN	COLOR: BLACK	1PCS
4	CARD	SYNTHETIC RESIN	COLOR: BLUE	1PCS
3	TERMINAL	COPPER ALLOY	PLATING: G/F	4PCS
2	SCREW	STEEL	PLATING: Ni	4PCS
1	GASKET	SYNTHETIC RUBBER	COLOR: BLACK	1PCS

QUALITY SYMBOLS

CRITICAL MAJOR
 ZERO DEFECT S.P.C

Tolerance

±0.80
 ±0.50
 ±0.25



NAME: JN4 4P Waterproof Endcode Plug

CONNECTOR

REV: A

SCALE: N:1

DATE: 2019/10/09

东莞市箐国电子有限公司

PART NO. B01-0041154-01

DRAW BY CHK BY APP BY

DRAWING NO. B01-028

DATE: 2019/10/09

2019/10/09新版发行

APPROVER King Zhou

DESCRIPTION

DATE

8

7

6

5

4

3

2

1