



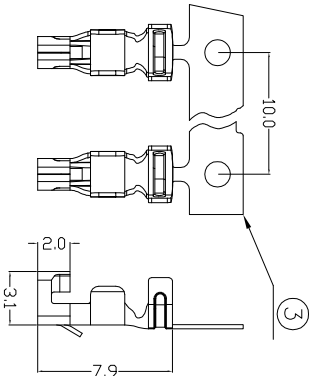




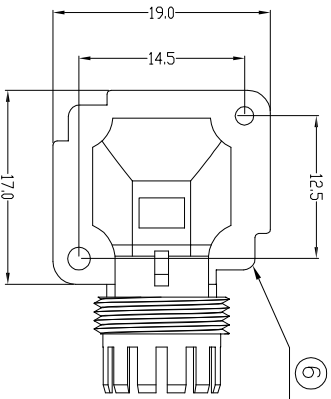
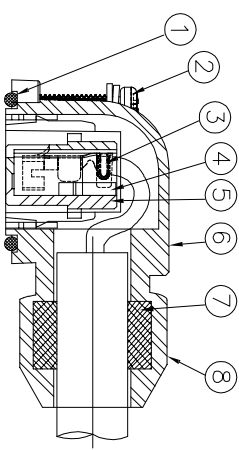





ROHS COMPLIANT

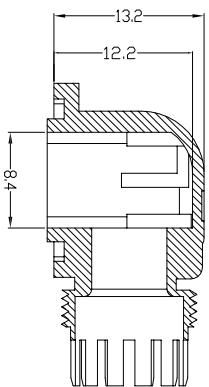

Voltage Current Rating:5 AMP.
Dielectric Withstanding Voltage:500V AC
Contact Resistance:30 mΩ Max.
Insulation Resistance:500MΩ Min.
Temperature Range:−20℃ to +85℃

8	GLAND NUT	SYNTHETIC RESIN	COLOR:BLACK	1PCS
7	BUSHING	SYNTHETIC RESIN	COLOR:BLACK	1PCS
6	HOOD	SYNTHETIC RESIN	COLOR:BLACK	1PCS
5	SOCKET INSULATOR	SYNTHETIC RESIN	COLOR:BLACK	1PCS
4	CARD	SYNTHETIC RESIN	COLOR:BLUE	1PCS
3	TERMINAL	COPPER ALLOY	PLATING:G/F	2PCS
2	SCREW	STEEL	PLATING:NI	2PCS
1	GASKET	SYNTHETIC RUBBER	COLOR:BLACK	1PCS
ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS

QUALITY SYMBOLS

□: MAJOR

△: CRITICAL

▽: ZERO DEFECT

Tolerance

±0.80

±0.50

±0.25

NAME: UN4 2P Waterproof Endcode Plug

REV: A

SCALE: N:1

DATE: 2019/10/09

PART NO. B01-0021154-01

CHK BY APP BY

DAWN HU KING ZHOU

DRAWING NO. B01-027

东莞市箐国电子有限公司

DATE DESCRIPTION APPROVER