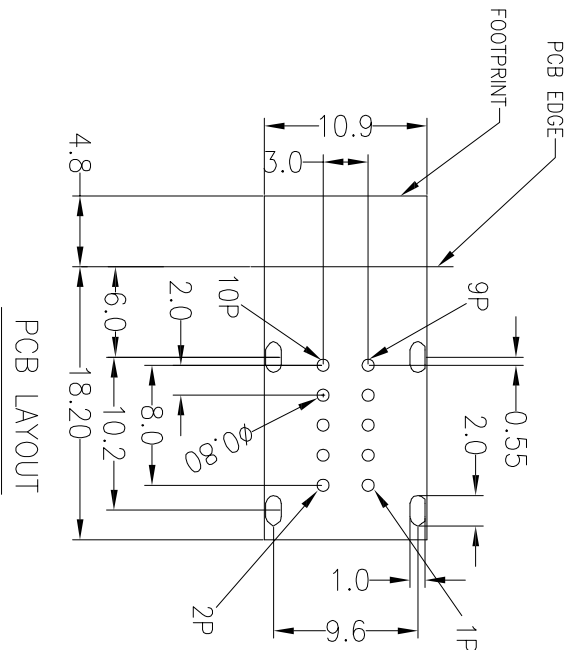
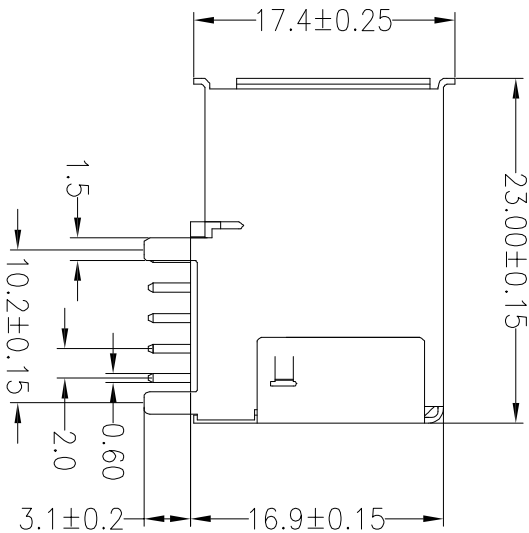
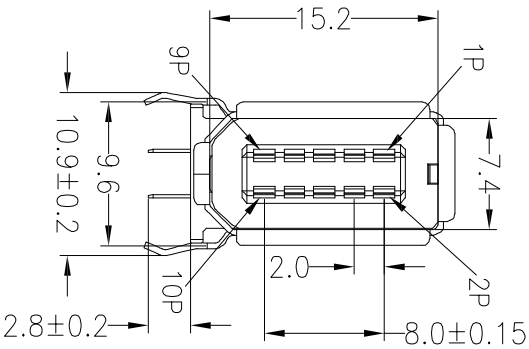


Voltage Current Rating:1.5 AMP.
Dielectric Withstanding Voltage:500V AC
Insulation Resistance:1000M Ω Min.
Temperature Range:-25℃ to +85℃

3	SHELL	COPPER ALLOY	PALTING:NI	
2	HOUSING	PBT+30%GF	COLOR:BLACK	
1	TERMINAL	COPPER ALLOY	CONTACT AREA:G/F	
ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS

			QUALITY SYMBOLS		Tolerance		NAME: SM-10 Female R/A DIP Type				PART NO.		B01-010013AN-01	
			☐ :	☒ :	X.	±0.50	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO. B05-025
					.X	±0.30	SCALE:	N:1	DATE:	2019/11/06	JINGLI	KING ZHOU		
A	Δ	2019/11/06	NEW ISSUE		JINGLI	CRITICAL MAJOR	∇ : ∇ :	东莞市箐国电子有限公司						
SIDE	DATE	DESCRIPTION	APPROVER		ZERO DEFECT	S.P.C	 							