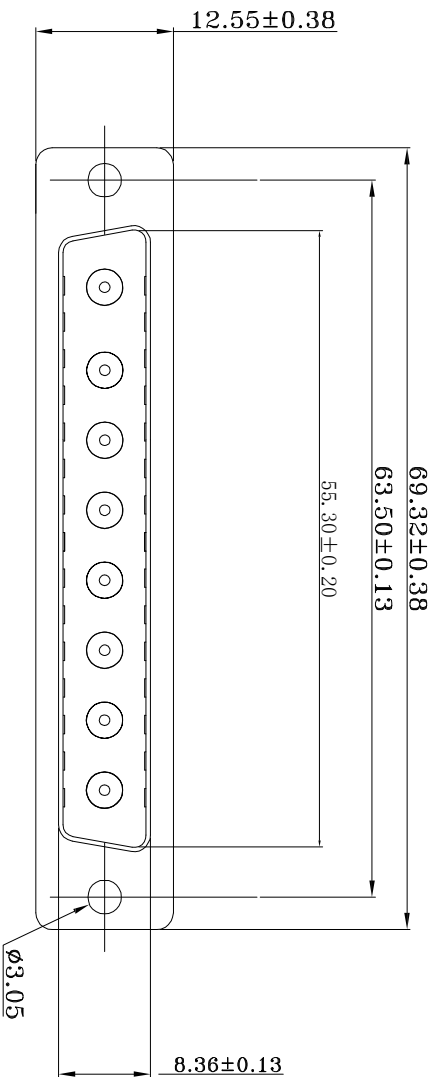


MATERIALS AND FINISH

SHELL : STEEL MATERIAL, TIN FINISHED
CONNECTOR INSULATOR : PBT THERMOPLASTIC,
30% GLASS FILLED, UL 94V-0 RATED, BLACK COLOR
HIGH POWER CONTACT MATERIAL: BRASS, 15u" GOLD PLATED

ELECTRICAL CHARACTERISTICS

HIGH POWER CONTACT CURRENT RATING : 10 OR 20 OR 40 AMPS
HIGH POWER CONTACT RESISTANCE : 2.7 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE :
1000 V AC FOR 1 MINUTE
INSULATION RESISTANCE : 5000 MEGAOHMS MIN.
TEMPERATURE RATING : -55°C ~ +125°C

PART NO:

B08-8W831140-X1

Current Rating: _____

A = 10 AMPS Dim.A ϕ 1.7
B = 20 AMPS Dim.A ϕ 2.8
C = 30 AMPS Dim.A ϕ 3.2
D = 40 AMPS Dim.A ϕ 4.6

A	QUALITY SYMBOLS		Tolerance		NAME: D-SUB 8W8 Male CONNECTOR (客户用图)		PART NO. B08-8W831140-X1	
		☐ :	☒ :	X.	REV: A	UNIT: mm	DRW BY: DAW NHU	CHK BY: KING ZHOU
		CRITICAL	MAJOR	.X	SCALE: NONE	DATE: 2020/05/10	DAW NHU	KING ZHOU
		ZERO DEFECT	S.P.C	.xx	DRAWING NO. 1198-008			
SIDE		DATE	DESCRIPTION	APPROVER				

东莞市箐国电子有限公司