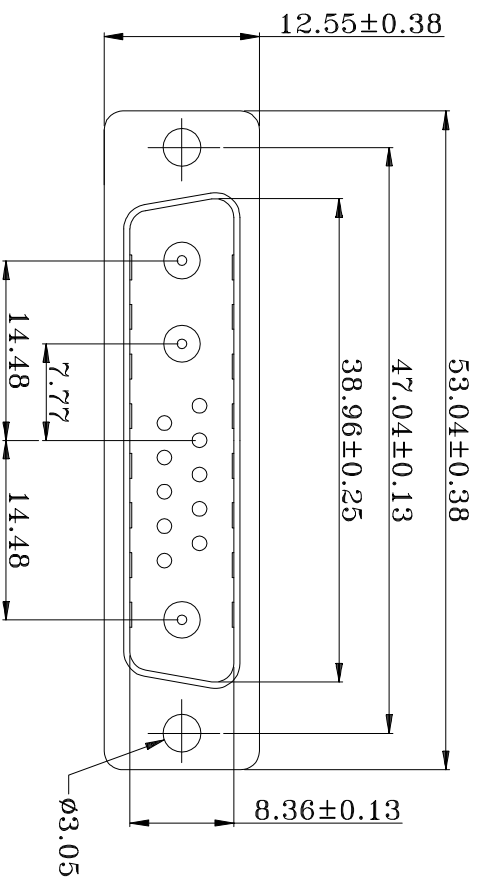



High Power Contact Current Rating:
10,20 or 40AMPS
High Power Contact Resistance:
2.7 Milliohms Max.
Dielectric Withstanding Voltage:
1000V AC For 1 Minute
Insulation Resistance:5000MΩ Min.
Temperature Range:-25°C to +85°C

PART NO:

B08-AW331140-X1

Current Rating:

A = 10	AMPS	Dim.A	ø1.7
B = 20	AMPS	Dim.A	ø2.8
C = 30	AMPS	Dim.A	ø3.2
D = 40	AMPS	Dim.A	ø4.6

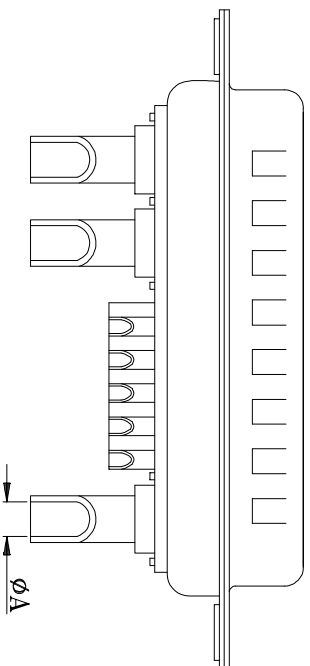

ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS
4	HOUSING	PBT+30%GF	COLOR: BLACK	
3	REAR SHELL	SPCC	PLATING: Sn	
2	FRONT SHELL	SPCC	PLATING: Ni	
1	TERMINAL	BRASS	TERMINAL FINISH: FULL GOLD FINISHED 2u"	

			QUALITY SYMBOLS		Tolerance		NAME: High-Power 13W3 Male Solder Type				PART NO.	B08-AM331140-X1		
			☐ :	☒ :	X.	±0.50	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO
			CRITICAL MAJOR		.X	±0.30	SCALE:	N:1	DATE:	2012/04/22	JINGLI	KING ZHOU		
A	△	2012/04/22	NEW ISSUE		JINGLI	.XX	东莞市箐国电子有限公司							
SIDE	DATE	DESCRIPTION	APPROVER		ZERO DEFECT	S.P.C								

东莞市箐国电子有限公司