


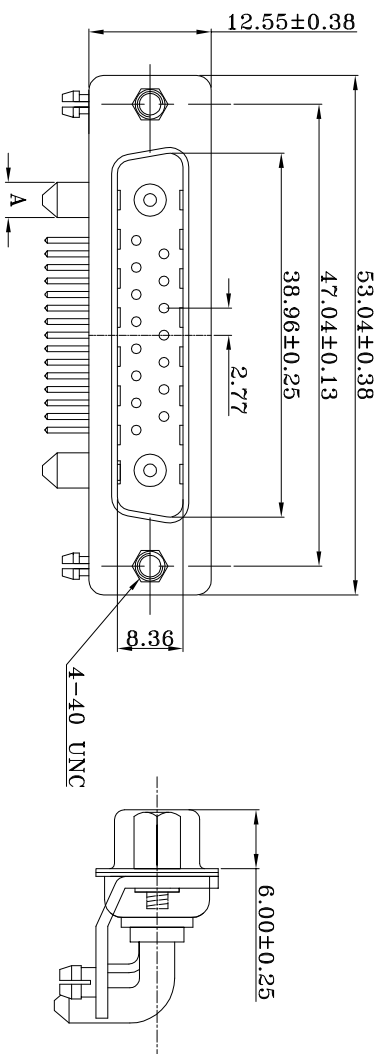


High Power Contact Current Rating:
10,20 or 40AMPS
High Power Contact Resistance:
2.7 Milliohms Max.
Dielectric Withstanding Voltage:
1000V AC For 1 Minute
Insulation Resistance:5000M Ω Min.
Temperature Range:-25°C to +85°C

PART NO: B08-AW25X14D-X1

HOUSING COLOR: _____
1:BLACK
3:GREEN
5:WHITE

CURRENT RATING: _____

A = 10 AMPS	Dim.A	Ø1.7	Dim.B	Ø2.2
B = 20 AMPS	Dim.A	Ø2.8	Dim.B	Ø3.3
C = 30 AMPS	Dim.A	Ø3.2	Dim.B	Ø3.7
D = 40 AMPS	Dim.A	Ø3.7	Dim.B	Ø4.2

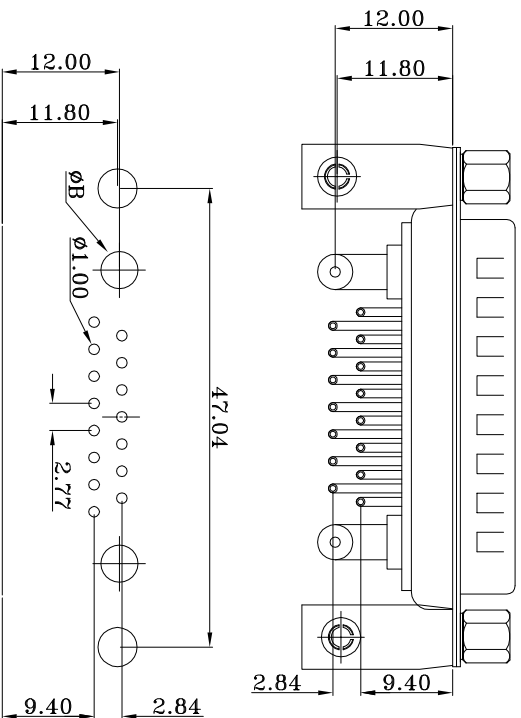

PCB LAYOUT

Technical drawing of a PCB layout showing dimensions and component placement. The drawing includes a top view and a side view. The top view shows a rectangular board with dimensions 12.00, 11.80, 47.04, 2.84, 9.40, and 12.55±0.38. It features a central component with dimensions 47.04±0.13, 38.96±0.25, and 2.77. There are also dimensions for the mounting holes: 8.36 and 4-40 UNC. The side view shows a component with a height of 6.00±0.25. The drawing is labeled 'PCB LAYOUT'.

High Power Contact Current Rating:
10.20 or 40AMPS
High Power Contact Resistance:
2.7 Milliohms Max.
Dielectric Withstanding Voltage:
1000V AC For 1 Minute
Insulation Resistance:5000MΩ Min.
Temperature Range:-25℃ to +85℃

PART NO:
B08-AW25X14D-X1

HOUSING COLOR:
1:BLACK
3:GREEN
5:WHITE

CURRENT RATING:
A = 10 AMPS Dim.A ø1.7 Dim.B ø2.2
B = 20 AMPS Dim.A ø2.8 Dim.B ø3.3
C = 30 AMPS Dim.A ø3.2 Dim.B ø3.7
D = 40 AMPS Dim.A ø3.7 Dim.B ø4.2

ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS
6	JACKSCREWS	BRASS	PLATING: Ni	
5	HOUSING	PBT+30%GF	COLOR: WHITE	
4	RIVETED INSERT	BRASS	PLATING: Ni	
3	REAR SHELL	SPCC	PLATING: Sn	
2	FRONT SHELL	SPCC	PLATING: Ni	
1	TERMINAL	BRASS	TERMINAL FINISH: FULL GOLD FINISHED 2u"	

东莞市箐国电子有限公司