


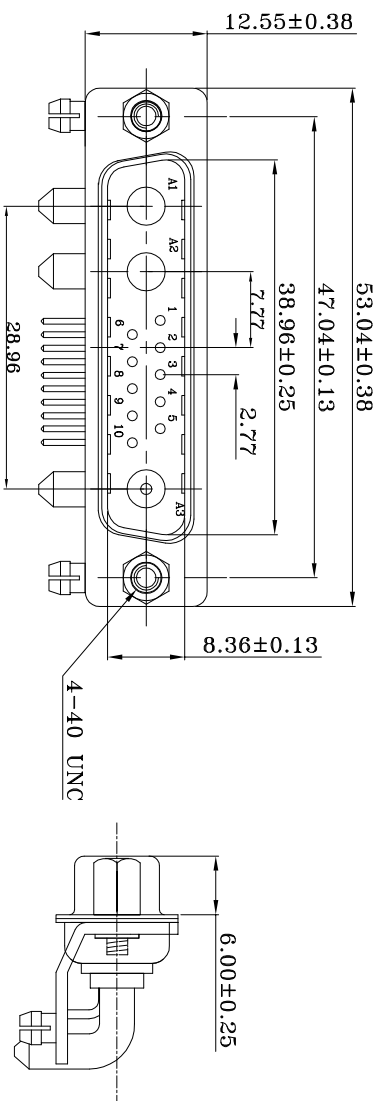

High Power Contact Current Rating:
10,20 or 40AMPS
High Power Contact Resistance:
2.7 Milliohms Max.
Dielectric Withstanding Voltage:
1000V AC For 1 Minute
Insulation Resistance:5000M Ω Min.
Temperature Range:-25 $^{\circ}$ C to +85 $^{\circ}$ C



PART NO: B08-AW35X14D-X1

HOUSING COLOR:—

1:BLACK
3:GREEN
5:WHITE

CURRENT RATING:

A = 10	AMPS	Dim.A	$\phi 1.7$	Dim.B	$\phi 2.2$
B = 20	AMPS	Dim.A	$\phi 2.8$	Dim.B	$\phi 3.3$
C = 30	AMPS	Dim.A	$\phi 3.2$	Dim.B	$\phi 3.7$
D = 40	AMPS	Dim.A	$\phi 3.7$	Dim.B	$\phi 4.2$

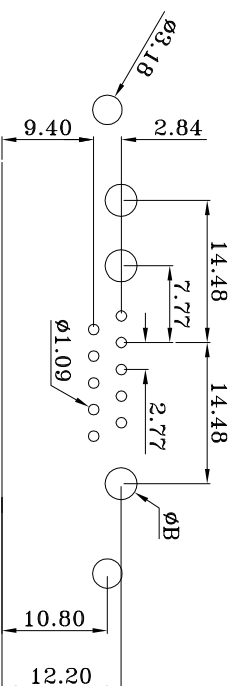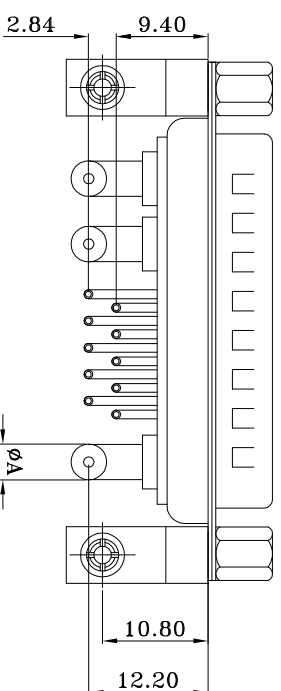

PCB LAYOUT

6	JACKSCREWS	BRASS	PLATING: NI	
5	HOUSING	PBT+30%GF	COLOR: WHITE	
4	RIVETED INSERT	BRASS	PLATING: NI	
3	REAR SHELL	SPCC	PLATING: Sn	
2	FRONT SHELL	SPCC	PLATING: NI	
1	TERMINAL	BRASS	TERMINAL FINISH: FULL GOLD FINISHED 2u"	
ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS

			QUALITY SYMBOLS		Tolerance		NAME: 13W3 Male R/A Type With Bracket+Nut		PART NO.		B08-AW35114D-X1		
			☐ :	☒ :	x.	±0.50	REV:	A	UNIT: mm	DRW BY	CHK BY	APP BY	DRAWING NO.
					.x	±0.30	SCALE:	N:1	DATE: 2017/05/13	JINGLI	KING ZHOU		B08-045
					.xx	±0.25							
			CRITICAL MAJOR										
			JINGLI										
			NEW ISSUE										
			2017/05/13										
			Δ										
A													
SIDE	DATE		DESCRIPTION	APPROVER	ZERO DEFECTS,P.C		东莞市箐国电子有限公司						

东莞市箴国电子有限公司