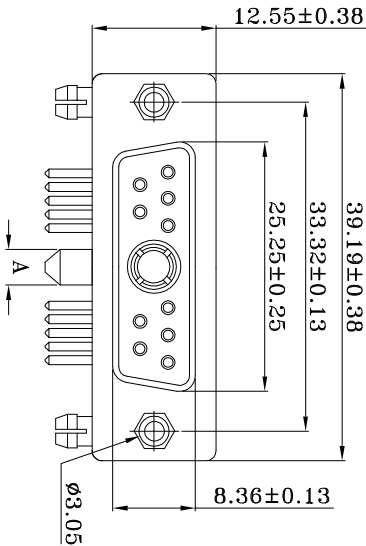
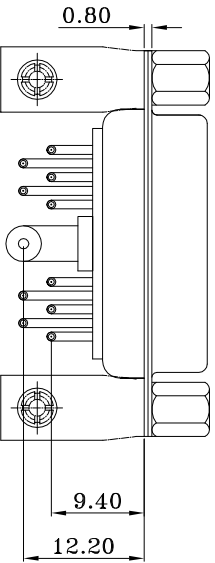



8	7	6	5	4	3	2	1																																																																							
F	High Power Contact Current Rating: 10,20 or 40AMPS High Power Contact Resistance: 2.7 Milliohms Max. Dielectric Withstanding Voltage: 1000V AC For 1 Minute Insulation Resistance:5000MR Min. Temperature Range:-25℃ to +85℃							F																																																																						
E								E																																																																						
D								D																																																																						
C	PART NO: B08-AW16X14D-X1 HOUSING COLOR: 1:BLACK 3:GREEN 5:WHITE CURRENT RATING: A = 10 AMPS Dim.A Ø1.7 Dim.B Ø2.2 B = 20 AMPS Dim.A Ø2.8 Dim.B Ø3.3 C = 30 AMPS Dim.A Ø3.2 Dim.B Ø3.7 D = 40 AMPS Dim.A Ø3.7 Dim.B Ø4.2							C																																																																						
B	 PCB LAYOUT							B																																																																						
A	<table><tr><td colspan="2">QUALITY SYMBOLS</td><td colspan="2">Tolerance</td><td colspan="3">NAME: 11W1 Female R/A Type With Bracket+Nut</td><td>PART NO.</td><td>B08-AW16114D-X1</td><td rowspan="4">DRAWING NO. B08-044</td></tr><tr><td>☐</td><td>CRITICAL</td><td>☒</td><td>MAJOR</td><td>X.</td><td>±0.50</td><td>REV: A</td><td>UNIT: mm</td><td>DRW BY</td><td>CHK BY</td><td>APP BY</td></tr><tr><td>☒</td><td>ZERO DEFECTS,P.C</td><td>☐</td><td></td><td>.xx</td><td>±0.30</td><td>SCALE: N:1</td><td>DATE: 2017/05/13</td><td>JINGLI</td><td>KING ZHOU</td><td></td></tr><tr><td colspan="2"></td><td colspan="2"></td><td></td><td>±0.25</td><td colspan="5"> 东 莞 市 箐 国 电 子 有 限 公 司 </td></tr><tr><td colspan="2">DATE</td><td colspan="2">DESCRIPTION</td><td colspan="2">APPROVER</td><td colspan="5"></td></tr><tr><td colspan="2">8</td><td colspan="2">7</td><td colspan="2">6</td><td colspan="2">5</td><td colspan="2">4</td><td colspan="2">3</td><td colspan="2">2</td><td colspan="2">1</td></tr></table>							QUALITY SYMBOLS		Tolerance		NAME: 11W1 Female R/A Type With Bracket+Nut			PART NO.	B08-AW16114D-X1	DRAWING NO. B08-044	☐	CRITICAL	☒	MAJOR	X.	±0.50	REV: A	UNIT: mm	DRW BY	CHK BY	APP BY	☒	ZERO DEFECTS,P.C	☐		.xx	±0.30	SCALE: N:1	DATE: 2017/05/13	JINGLI	KING ZHOU							±0.25	东 莞 市 箐 国 电 子 有 限 公 司					DATE		DESCRIPTION		APPROVER							8		7		6		5		4		3		2		1		A
QUALITY SYMBOLS		Tolerance		NAME: 11W1 Female R/A Type With Bracket+Nut			PART NO.	B08-AW16114D-X1	DRAWING NO. B08-044																																																																					
☐	CRITICAL	☒	MAJOR	X.	±0.50	REV: A	UNIT: mm	DRW BY		CHK BY	APP BY																																																																			
☒	ZERO DEFECTS,P.C	☐		.xx	±0.30	SCALE: N:1	DATE: 2017/05/13	JINGLI		KING ZHOU																																																																				
					±0.25	东 莞 市 箐 国 电 子 有 限 公 司																																																																								
DATE		DESCRIPTION		APPROVER																																																																										
8		7		6		5		4		3		2		1																																																																