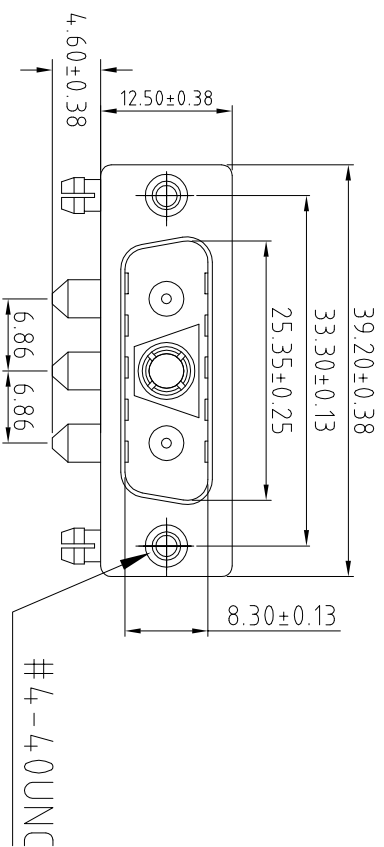




High Power Contact Current Rating:
10,20 or 40AMPS
High Power Contact Resistance:
2.7 Milliohms Max.
Dielectric Withstanding Voltage:
1000V AC For 1 Minute
Insulation Resistance:5000MΩ Min.
Temperature Range:-25°C to +85°C

PART NO:

B09-3V35114D-X1

Current Rating: _____

A = 10	AMPS	Dim.A	$\phi 1.7$	Dim.B	$\phi 2.2$
B = 20	AMPS	Dim.A	$\phi 2.8$	Dim.B	$\phi 3.3$
C = 30	AMPS	Dim.A	$\phi 3.2$	Dim.B	$\phi 3.7$
D = 40	AMPS	Dim.A	$\phi 3.7$	Dim.B	$\phi 4.2$

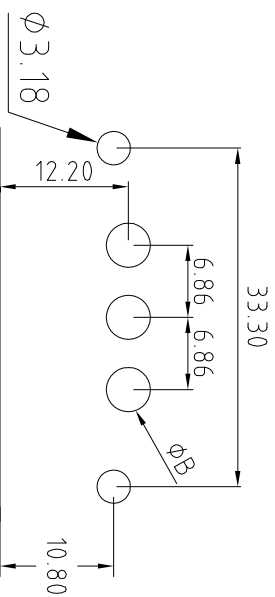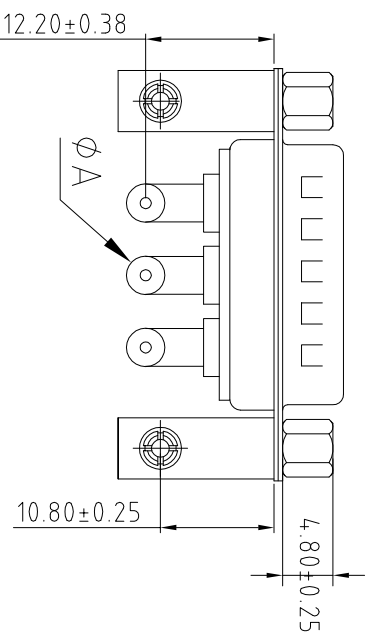

PCB LAYOUT

6	JACKSCREWS	BRASS	PLATING: NI	
5	HOUSING	PBT+30%GF	COLOR: WHITE	
4	RIVETED INSERT	BRASS	PLATING: NI	
3	REAR SHELL	SPCC	PLATING: Sn	
2	FRONT SHELL	SPCC	PLATING: NI	
1	TERMINAL	BRASS	TERMINAL FINISH: FULL GOLD FINISHED 2u"	
ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS

			QUALITY SYMBOLS	Tolerance	NAME: 3V3 Male R/A Type With Bracket+Nut		PART NO.	B09-3V35114D-X1		
			☐ : ☒ :	x. ±0.50	REV: A	UNIT: mm	DRW BY	CHK BY	APP BY	DRAWING NO.
			CRITICAL MAJOR	.x ±0.30	SCALE: N:1	DATE: 2019/09/04	JINGLI	KING ZHOU		B09-007
Δ	2019/09/04	NEW ISSUE		.xx ±0.25						
SIDE	DATE	DESCRIPTION	APPROVER	☒ : ☒ :	东莞市箐国电子有限公司					
			ZERO DEFECT S.P.C	 						

东莞市箐国电子有限公司