

<

- ELECTRICAL CHARACTERISTICS

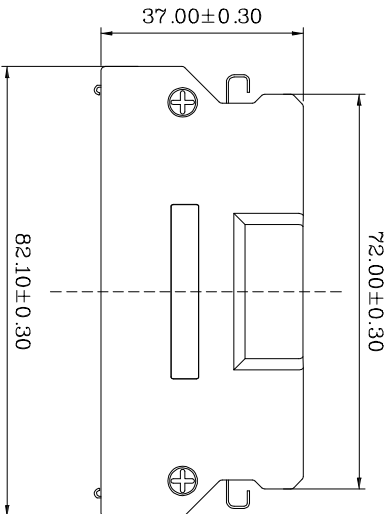

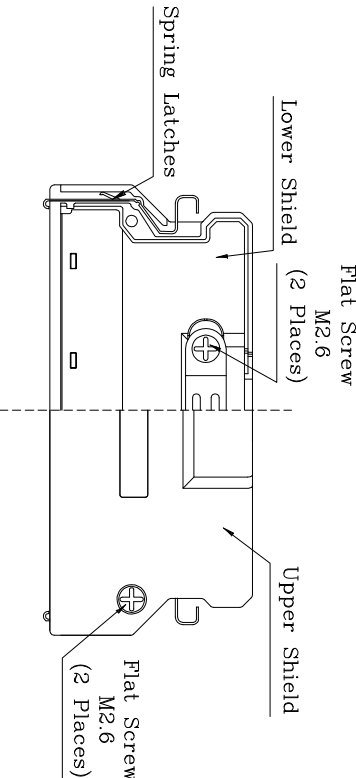
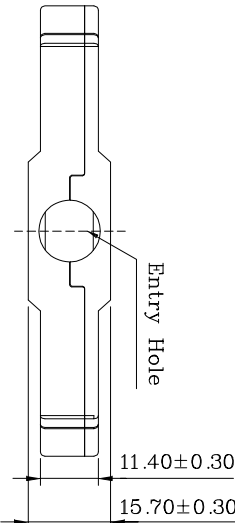
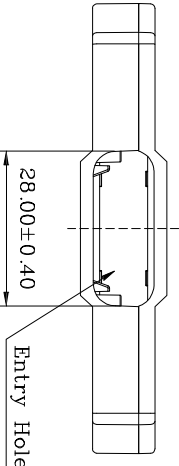
Contact Current Rating: 1 Amp

Dielectric Withstanding Voltage: 500V AC/Min

Insulation Resistance: 500M Ω /Mim

Contact Resistance: 35mΩ/Max

Operation Temperature: $-55^{\circ}\text{C} \sim +105^{\circ}\text{C}$

8		7	6	5	4	3	2	1
								
								
								
FEATURES: ● Round cable straight exit ● Strain Relief Staple With Spring latches ● Back shell desing by Die-Cast ● Excellent EMI/RFI protection								
MATERIALS: ● Back Shell: Zinc plated nickel over copper ● Spring latches:stainless Steel ● Screw: steel nickel plated over copper ● Cable Clipper: steel nickel plated								
								
								
								
PART NO: BXX-100NN8N3-XX TYPE:_____ 02= HPDB Type 03= HPCN Type ENTRY HOLE SIZES:_____ 1A = <DD 11.0mm> 1D = <DD 14.0mm> 2H = <DD 28×11mm>								
QUALITY SYMBOLS ☐ : ☒ : CRITICAL MAJOR ZERO DEFECT S.P.C Tolerance NAME: SCS1 100P Male Metal Hood With Latch PART NO. BXX-100NN8N3-XX REV: A UNIT: mm DRW BY CHK BY APP BY DRAWING NO. B03-100N SCALE: N:1 DATE: 2020/04/12 DAWN HU KING ZHOU								
DATE: 2020/04/12新版发行 DESCRIPTION: King Zhou SIDE: 8 7 6 5 4 3 2 1								

东莞市箐国电子有限公司