

NOTES:

- ELECTRICAL CHARACTERISTICS**
- Contact Current Rating: 1 Amp
- Dielectric Withstanding Voltage: 500V AC
- Insulation Resistance: 500MΩ/Min
- Contact Resistance: 35mΩ/Max
- Operation Temperature: -45°C ~ +85°C

4	COVER	PBT+30%G.F. (UL 94V-0)	COLOR:BLACK	
3	HOUSING	PBT+30%G.F. (UL 94V-0)	COLOR:BLACK	
2	SHELL	SPCC (t=0.50mm)	Ni Plating	
1	TERMINAL	PHOSPHOR BRONZE(t=0.25mm)	CONTACT AREA: Au G/F SOLDER AREA: Sn 100u" UNDER-PLATING: Ni 50u"	

QUALITY SYMBOLS

□ : ☒ :
CRITICAL MAJOR



▽ : ▽ :
ZERO DEFECT S.P.C

Tolerance	NAME:	SCSI 68P Male Solder Type for cable	PART NO.	B03-068311E0-01
X. ∅0.50	REV:	A	DRW BY	CHK BY
.X ∅0.30	SCALE:	N:1	DATE:	2020/01/14
.XX ±0.25			DAMN HU	KING ZHOU

东莞市箐园电子有限公司

8	7	6	5	4	3	2	1
DATE	DESCRIPTION	APPROVER	ZERO DEFECT	S.P.C			
2020/01/14	新版发行	King Zhou					

8	7	6	5	4	3	2	1
SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT	S.P.C		
△	2020/01/14	新版发行	King Zhou				

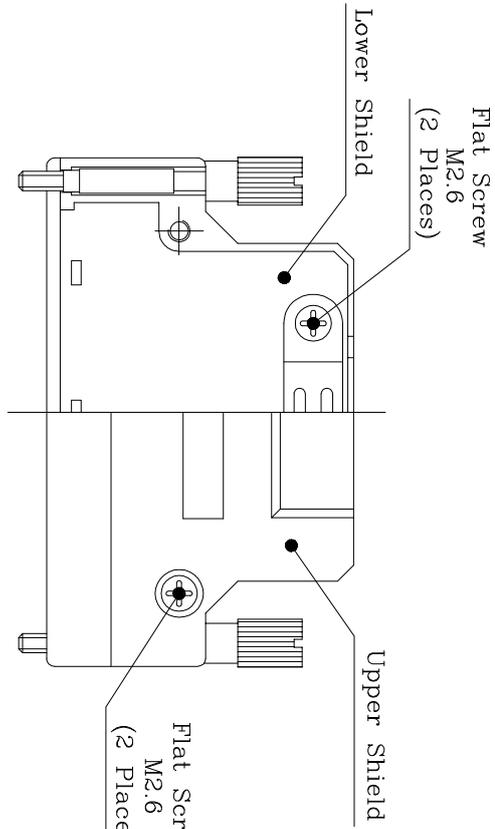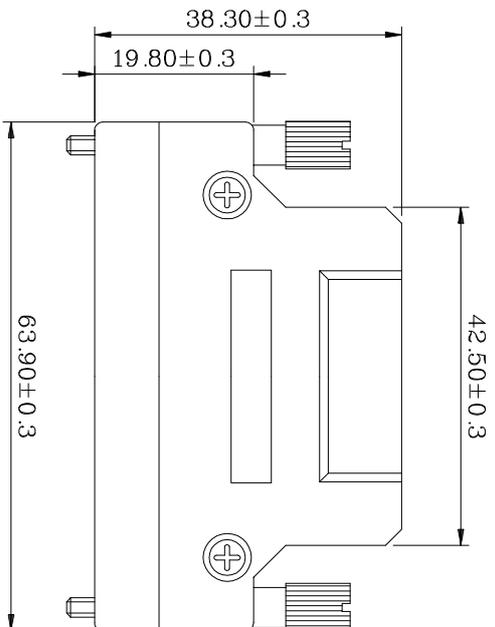

• PART NO.:




B03-068NN8NX-X0

THREADS FINISHES:

- 7: jackscrews M2.6
- 8: jackscrews #2-56
- 9: jackscrews #4-40

ENTRY HOLE SIZES:

- B:11.0
- E:14.0

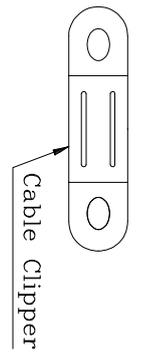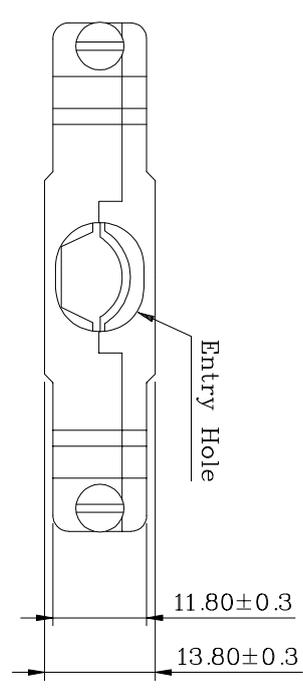

ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS
4	CABLE CLIPPER	STEEL	PLATING: NI	
3	FLAT SCRW	STEEL	PLATING: NI	
2	JACK SCRW	STEEL	PLATING: NI	
1	BACKSHELL	ZINC ALLOY	PLATING: NI	

QUALITY SYMBOLS

□: :
 :
 CRITICAL MAJOR

▽: :
 :
 ZERO DEFECT S.P.C

Tolerance

X.	±0.80
.X	±0.50
.XX	±0.30

NAME: SCS 68P Male ZINC Hood Screw Type

REV: A

SCALE: N:1

PART NO. B03-068NN8NX-X0

APP BY

DRAWING NO. B03-049

东莞市箐国电子有限公司

DATE	DESCRIPTION	APPROVER	ZERO DEFECT	S.P.C
2009/06/05	新板发行	King Zhou	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>