

Contact Current Rating: 0.5 Amp
 Dielectric Withstanding Voltage: 500V AC/Min
 Insulation Resistance: 500MΩ/Min
 Contact Resistance: 35mΩ/Max
 Operation Temperature: -45°C ~ +85°C



4	COVER	PBT+30%GF. (UL 94V-0)	COLOR:BLACK
3	HOUSING	PBT+30%GF. (UL 94V-0)	COLOR:BLACK
2	SHELL	SPCC (t=0.50mm)	Ni Plating
1	TERMINAL	PHOSPHOR BRONZE(t=0.25mm)	CONTACT AREA: Au 50" SOLDER AREA: Sn 1000" UNDER-PLATING: Ni 50u"

NAME:	SCSI-II 100P Male Solder Type		PART NO.	B03-05031E0-01
REV:	B	UNIT:	mm	APP BY
SCALE:	N:1	DATE:	2021/06/15	DRAWING NO.
		DRAWN BY	KING ZHOU	B03-0503



QUALITY SYMBOLS	Tolerance
□: CRITICAL	x. ±0.50
⊠: MAJOR	.x ±0.30
▽: ZERO DEFECT	.xx ±0.15

东莞市箐国电子有限公司

DATE	2021/06/15 新版发行	APPROVER	King Zhou
DESCRIPTION			



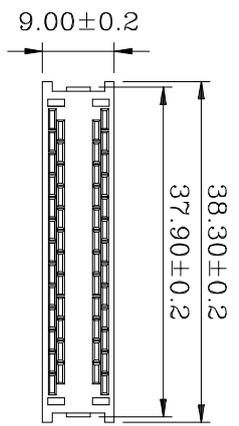
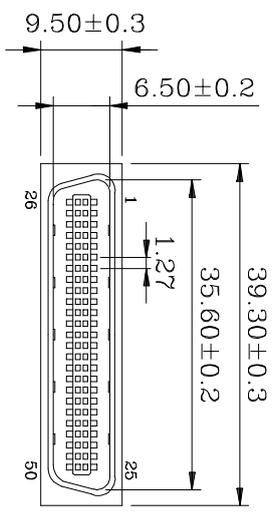


Contact Current Rating: 0.5 Amp
 Contact Withstanding Voltage: 500V AC/Min
 Insulation Resistance: 500MΩ/Min
 Contact Resistance: 35mΩ/Max
 Operation Temperature: -45°C ~ +85°C

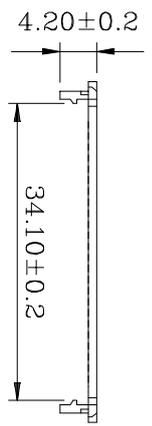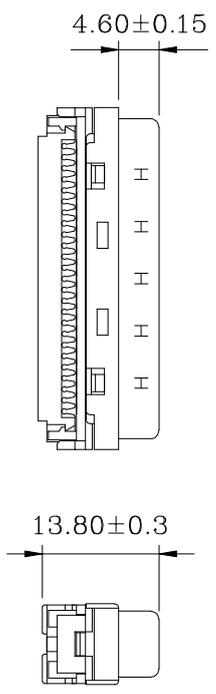

Termination Cover
(1 Places)

PART NO: B03-050111E0-X0

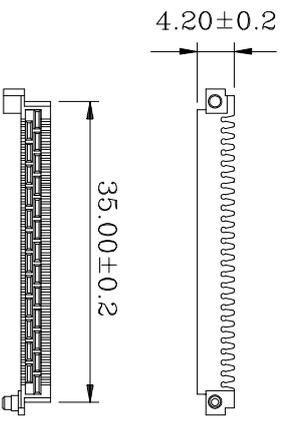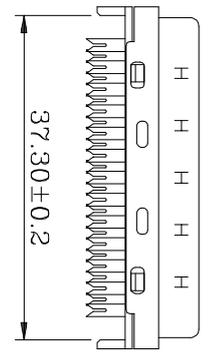

Wire Holder
(2 Places)

WIRE HOLDER: _____
 28AWG or 30AWG WIRE
 6 = 0.62mm
 7 = 0.75mm
 9 = 0.90mm

4	COVER	PBT+30%GF. (UL 94V-0)	COLOR:BLACK	
3	HOUSING	PBT+30%GF. (UL 94V-0)	COLOR:BLACK	
2	SHELL	SPCC (t=0.50mm)	Ni Plating	
1	TERMINAL	PHOSPHOR BRONZE(=0.25mm)	CONTACT AREA: Au 5u" SOLDER AREA: Sn 100u" UNDER-PLATING: Ni 50u"	

QUALITY SYMBOLS

Tolerance

NAME: SCS1 50P Male IDC Type For Cable
 PART NO. B03-050111E0-01

CRITICAL
 MAJOR
 ZERO DEFECT S.P.C

x.
 .x
 .xx

REV: B
 UNIT: mm
 DATE: 2021/06/15
 SCALE: N:1





APPROVER

King Zhou

DRW BY: CHK BY: APP BY: DRAWING NO. B03-0503



8	DATE	DESCRIPTION	APPROVER	5	4	3	2	1
A	2021/06/15新板发行		King Zhou					
A								
A								

东莞市箐国电子有限公司

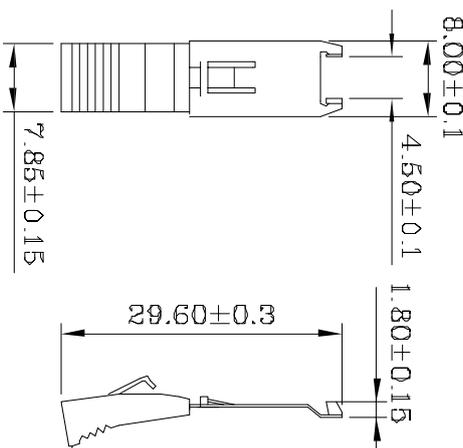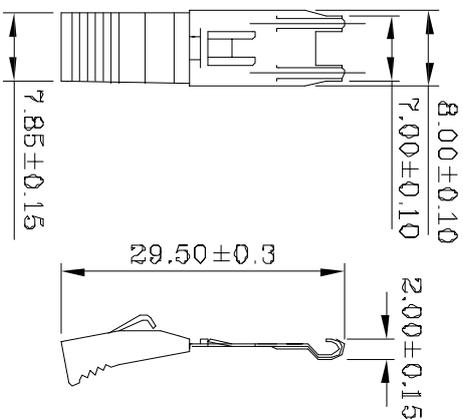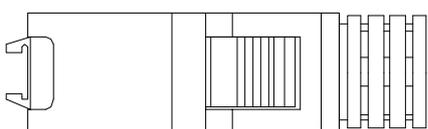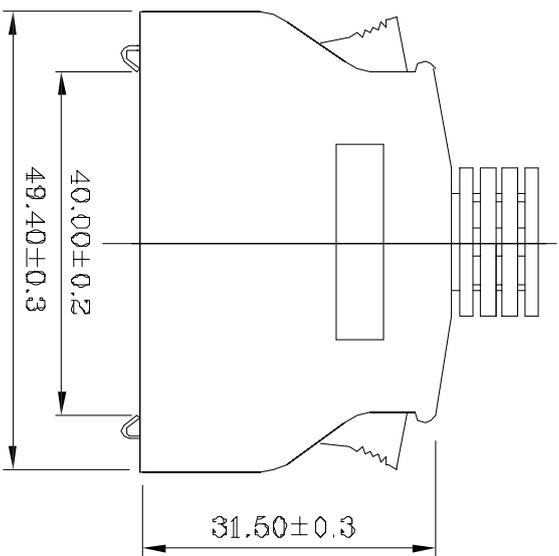

LS: Fish Hooks

SS: Flag Hooks

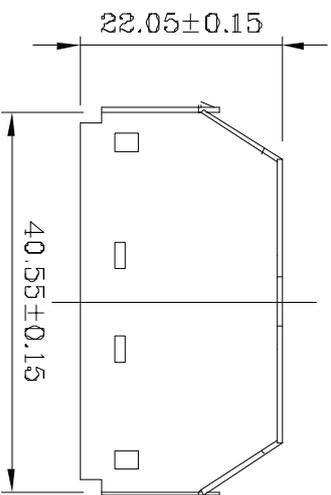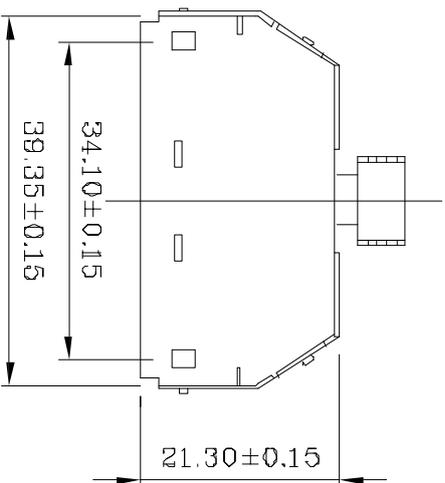

PART NO:

B03-050H11XX-X X

LATCH TYPE:

LS= FISH HOOKS
SS= FLAG HOOKS

COLOR:

A= BLACK
B= BEIGE

ENTRY HOLE SIZES:

9 = (DD 9.0mm)
A = (DD 10.5mm)

1	COVER	ABS. (UL 94V-0)	COLOR:BLACK
2	LATCH	STEEL	Ni Plating
3	SHELL	SPCC (t=0.50mm)	Ni Plating

ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS
------	-------	----------	---------	--------------

NAME: SCS1 50P Male ABS Hood Latch Type

REV: B UNIT: mm

SCALE: N:1 DATE: 2021/06/15

东莞市箐国电子有限公司

QUALITY SYMBOLS

□: MAJOR

△: CRITICAL

▽: ZERO DEFECT

Tolerance

x: ±0.50

x: ±0.30

.xx: ±0.15

DRW BY: KING ZHOU

CHK BY: KING ZHOU

APP BY: KING ZHOU

PART NO. B03-050H11XX-X X

DRAWING NO. B03-050H

APPROVER: King Zhou

DESCRIPTION: ZERO DEFECT S.P.C

DATE: 2021/06/15

DATE: 2021/06/15

DATE: 2021/06/15

DATE: 2021/06/15

DATE: 2021/06/15