
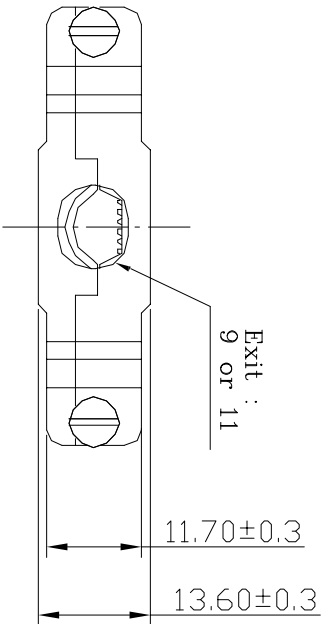


[illegible]

8		7		6		5		4		3		2		1																																																																																												
F																																																																																																										
39.30±0.3 34.85±0.2 5.70±0.2 9.30±0.3 26 50 1 1.27 25 38.30±0.15 37.90±0.15 Termination Cover (1 Places) Contact Current Rating: 0.5 Amp Dielectric Withstanding Voltage: 500V AC/Min Insulation Resistance: 500MΩ/Min Contact Resistance: 35mΩ/Max Operaion Temperature: -45°C ~ +85°C																																																																																																										
E																																																																																																										
5.00±0.15 15.30±0.3 5.00±0.15 34.10±0.15 4.20±0.1 Wire Holder (2 Places) 35.00±0.15 PART NO: B02-05011E0-X0 WIRE HOLDER: _____ 28AWG or 30AWG WIRE 6 = 0.62mm 7 = 0.75mm 9 = 0.90mm																																																																																																										
D																																																																																																										
C																																																																																																										
B																																																																																																										
A																																																																																																										
<table><tr><td colspan="2">A</td><td colspan="2"></td><td colspan="2">QUALITY SYMBOLS</td><td colspan="2">Tolerance</td><td colspan="2">NAME:</td><td colspan="2">SCSI-II 50P Male IDC Type For Cable</td><td colspan="2">PART NO.</td><td colspan="2">B02-05011E0-01</td></tr><tr><td colspan="2">A</td><td colspan="2"></td><td colspan="2">□ : MAJOR</td><td colspan="2">X. ±0.50</td><td colspan="2">REV: B</td><td colspan="2">mm</td><td colspan="2">DRW BY</td><td colspan="2">CHK BY</td><td colspan="2">APP BY</td><td colspan="2">DRAWING NO.</td></tr><tr><td colspan="2">A</td><td colspan="2">2021/06/15新板发行</td><td colspan="2">King Zhou</td><td colspan="2">.x ±0.30</td><td colspan="2">SCALE: N:1</td><td colspan="2">DATE: 2021/06/15</td><td colspan="2">DAWN HU</td><td colspan="2">KING ZHOU</td><td colspan="2"></td><td colspan="2">B03-0501</td></tr><tr><td colspan="2">SIDE</td><td colspan="2">DATE</td><td colspan="2">DESCRIPTION</td><td colspan="2">APPROVER</td><td colspan="2">ZERO DEFECT</td><td colspan="2">S.P.C</td><td colspan="2"></td><td colspan="5">东莞市箐国电子有限公司</td></tr><tr><td colspan="2">8</td><td colspan="2">7</td><td colspan="2">6</td><td colspan="2">5</td><td colspan="2">4</td><td colspan="2">3</td><td colspan="2">2</td><td colspan="2">1</td></tr></table>																A				QUALITY SYMBOLS		Tolerance		NAME:		SCSI-II 50P Male IDC Type For Cable		PART NO.		B02-05011E0-01		A				□ : MAJOR		X. ±0.50		REV: B		mm		DRW BY		CHK BY		APP BY		DRAWING NO.		A		2021/06/15新板发行		King Zhou		.x ±0.30		SCALE: N:1		DATE: 2021/06/15		DAWN HU		KING ZHOU				B03-0501		SIDE		DATE		DESCRIPTION		APPROVER		ZERO DEFECT		S.P.C				东莞市箐国电子有限公司					8		7		6		5		4		3		2		1	
A				QUALITY SYMBOLS		Tolerance		NAME:		SCSI-II 50P Male IDC Type For Cable		PART NO.		B02-05011E0-01																																																																																												
A				□ : MAJOR		X. ±0.50		REV: B		mm		DRW BY		CHK BY		APP BY		DRAWING NO.																																																																																								
A		2021/06/15新板发行		King Zhou		.x ±0.30		SCALE: N:1		DATE: 2021/06/15		DAWN HU		KING ZHOU				B03-0501																																																																																								
SIDE		DATE		DESCRIPTION		APPROVER		ZERO DEFECT		S.P.C				东莞市箐国电子有限公司																																																																																												
8		7		6		5		4		3		2		1																																																																																												
<table><tr><td colspan="2">B</td><td colspan="2">ITEM</td><td colspan="2">DESC.</td><td colspan="2">MATERIAL</td><td colspan="2">REMARKS</td><td colspan="2">PART REMARKS</td></tr><tr><td colspan="2">4</td><td colspan="2">COVER</td><td colspan="2">PBT+30%F. (UL 94V-0)</td><td colspan="2">COLOR:BLACK</td><td colspan="2"></td><td colspan="2"></td></tr><tr><td colspan="2">3</td><td colspan="2">HOUSING</td><td colspan="2">PBT+30%F. (UL 94V-0)</td><td colspan="2">COLOR:BLACK</td><td colspan="2"></td><td colspan="2"></td></tr><tr><td colspan="2">2</td><td colspan="2">SHELL</td><td colspan="2">SPCC (t=0.50mm)</td><td colspan="2">Ni Plating</td><td colspan="2"></td><td colspan="2"></td></tr><tr><td colspan="2">1</td><td colspan="2">TERMINAL</td><td colspan="2">PHOSPHOR BRONZE(t=0.25mm)</td><td colspan="2">CONTACT AREA: Au 5u" SOLDER AREA: Sn 100u" UNDER-PLATING: Ni 50u"</td><td colspan="2"></td><td colspan="2"></td></tr></table>																B		ITEM		DESC.		MATERIAL		REMARKS		PART REMARKS		4		COVER		PBT+30%F. (UL 94V-0)		COLOR:BLACK						3		HOUSING		PBT+30%F. (UL 94V-0)		COLOR:BLACK						2		SHELL		SPCC (t=0.50mm)		Ni Plating						1		TERMINAL		PHOSPHOR BRONZE(t=0.25mm)		CONTACT AREA: Au 5u" SOLDER AREA: Sn 100u" UNDER-PLATING: Ni 50u"																																				
B		ITEM		DESC.		MATERIAL		REMARKS		PART REMARKS																																																																																																
4		COVER		PBT+30%F. (UL 94V-0)		COLOR:BLACK																																																																																																				
3		HOUSING		PBT+30%F. (UL 94V-0)		COLOR:BLACK																																																																																																				
2		SHELL		SPCC (t=0.50mm)		Ni Plating																																																																																																				
1		TERMINAL		PHOSPHOR BRONZE(t=0.25mm)		CONTACT AREA: Au 5u" SOLDER AREA: Sn 100u" UNDER-PLATING: Ni 50u"																																																																																																				
A																																																																																																										

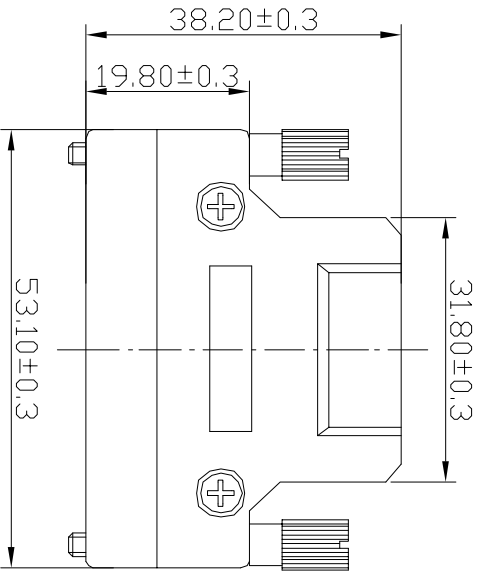

Contact Current Rating: 1 Amp
Dielectric Withstanding Voltage: 500V AC/Min
Insulation Resistance: 500MΩ/Min

Contact Resistance: 35mΩ/Max
Operation Temperature: -45°C ~ +85°C

Flat Screw
M2.6
(2 Places)


Back shell-1

Cable Clipper

Back Shell-2

Flat Screw
M2.6
(2 Places)

Jackscrew
(2 Places)



PART NO:

B03-050N11NX-XX

JACKSCREWS:

7 = M2.6
8 = 2-56#
9 = 4-40#

ENTRY HOLE SIZES:

90 = (CD 9.0mm)
1B = (CD 11.0mm)

1	COVER	ABS+30%F. (UL 94V-0)	COLOR:BLACK	
2	SCREW	STEEL	Ni Plating	
3	SHELL	SPCC (t=0.50mm)	Ni Plating	
ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS

QUALITY SYMBOLS

□ :

☒ :

CRITICAL

MAJOR

▽ :

▽ :

ZERO DEFECT

S.P.C

Tolerance

X. ±0.50

.X ±0.30

.XX ±0.15

NAME:

SCS 50P Mde ZINC Hood With Screw

PART NO.

B03-050N11NX-XX

REV:

B

UNIT:

mm

DRW BY

CHK BY

APP BY

DRAWING NO.

SCALE:

N:1

DATE:

2021/06/15

DAWN HU

KING ZHOU

B02-1003

东莞市箐国电子有限公司

△		
△		
△	2021/06/15新版发行	King Zhou
SIDE	DATE	DESCRIPTION
8	7	6
5	4	3
2	1	

8	7	6	5	4	3	2	1
---	---	---	---	---	---	---	---