
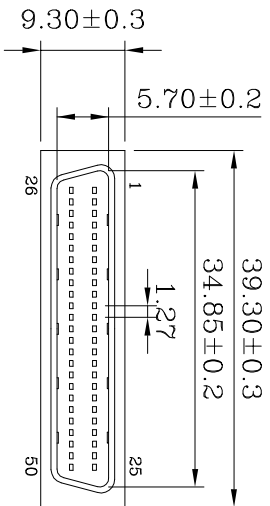
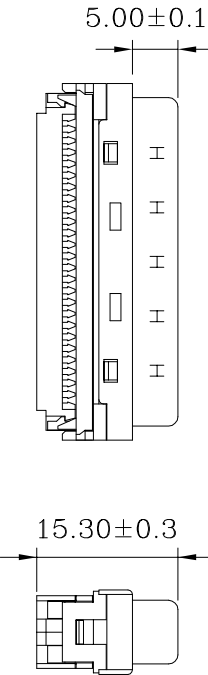

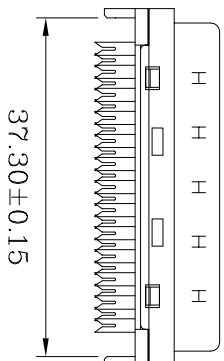





F	8	7	6	5	4	3	2	1																																																										
E	39.30±0.2 34.85±0.15 1.27 5.7±0.15 26 50																																																																	
D	9.3±0.2 16.4±0.3																																																																	
C	5.0±0.15																																																																	
B	<table><tr><td>4</td><td>COVER</td><td>PBT+30%G.F. (UL 94V-0)</td><td>COLOR:BLACK</td><td></td></tr><tr><td>3</td><td>HOUSING</td><td>PBT+30%G.F. (UL 94V-0)</td><td>COLOR:BLACK</td><td></td></tr><tr><td>2</td><td>SHELL</td><td>SPCC (t=0.50mm)</td><td>Ni Plating</td><td></td></tr><tr><td>1</td><td>TERMINAL</td><td>PHOSPHOR BRONZE(t=0.25mm)</td><td>CONTACT AREA:Au 50" SOLDER AREA:Sn 1000" UNDER-PLATING:Ni 50"</td><td></td></tr></table>								4	COVER	PBT+30%G.F. (UL 94V-0)	COLOR:BLACK		3	HOUSING	PBT+30%G.F. (UL 94V-0)	COLOR:BLACK		2	SHELL	SPCC (t=0.50mm)	Ni Plating		1	TERMINAL	PHOSPHOR BRONZE(t=0.25mm)	CONTACT AREA:Au 50" SOLDER AREA:Sn 1000" UNDER-PLATING:Ni 50"																																							
4	COVER	PBT+30%G.F. (UL 94V-0)	COLOR:BLACK																																																															
3	HOUSING	PBT+30%G.F. (UL 94V-0)	COLOR:BLACK																																																															
2	SHELL	SPCC (t=0.50mm)	Ni Plating																																																															
1	TERMINAL	PHOSPHOR BRONZE(t=0.25mm)	CONTACT AREA:Au 50" SOLDER AREA:Sn 1000" UNDER-PLATING:Ni 50"																																																															
A	<table><tr><td colspan="2">QUALITY SYMBOLS</td><td colspan="2">Tolerance</td><td colspan="4">NAME: SCS-II 100P Male Solder Type</td><td colspan="2">PART NO. B02-050311C0-01</td></tr><tr><td>□ :</td><td>☒ :</td><td>X.</td><td>±0.50</td><td>REV:</td><td>B</td><td>UNIT:</td><td>mm</td><td>DRW BY</td><td>CHK BY</td><td>APP BY</td><td>DRAWING NO.</td></tr><tr><td>CRITICAL</td><td>MAJOR</td><td>.x</td><td>±0.30</td><td>SCALE:</td><td>N:1</td><td>DATE:</td><td>2021/06/15</td><td>DAMN HU</td><td>KING ZHOU</td><td></td><td>B02-0503</td></tr><tr><td>ZERO DEFECT</td><td>S.P.C</td><td>.xx</td><td>±0.15</td><td colspan="8">东莞市箐国电子有限公司</td></tr><tr><td>SIDE</td><td>DATE</td><td colspan="2">DESCRIPTION</td><td colspan="2">APPROVER</td><td>5</td><td>4</td><td>3</td><td>2</td><td>1</td><td></td></tr></table>								QUALITY SYMBOLS		Tolerance		NAME: SCS-II 100P Male Solder Type				PART NO. B02-050311C0-01		□ :	☒ :	X.	±0.50	REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	CRITICAL	MAJOR	.x	±0.30	SCALE:	N:1	DATE:	2021/06/15	DAMN HU	KING ZHOU		B02-0503	ZERO DEFECT	S.P.C	.xx	±0.15	东莞市箐国电子有限公司								SIDE	DATE	DESCRIPTION		APPROVER		5	4	3	2	1	
QUALITY SYMBOLS		Tolerance		NAME: SCS-II 100P Male Solder Type				PART NO. B02-050311C0-01																																																										
□ :	☒ :	X.	±0.50	REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.																																																							
CRITICAL	MAJOR	.x	±0.30	SCALE:	N:1	DATE:	2021/06/15	DAMN HU	KING ZHOU		B02-0503																																																							
ZERO DEFECT	S.P.C	.xx	±0.15	东莞市箐国电子有限公司																																																														
SIDE	DATE	DESCRIPTION		APPROVER		5	4	3	2	1																																																								

8		7		6		5		4		3		2		1																																																																																							
F																																																																																																					
 Contact Current Rating: 0.5 Amp Dielectric Withstanding Voltage: 500V AC/Min Insulation Resistance: 500MΩ/Min Contact Resistance: 35mΩ/Max Operaion Temperature: -45°C ~ +85°C																																																																																																					
E																																																																																																					
 																																																																																																					
D																																																																																																					
  PART NO: B02-05011E0-X0 WIRE HOLDER: _____ 28AWG or 30AWG WIRE 6 = 0.62mm 7 = 0.75mm 9 = 0.90mm																																																																																																					
C																																																																																																					
 Wire Holder (2 Places)																																																																																																					
B																																																																																																					
 																																																																																																					
A																																																																																																					
<table><tr><td colspan="2">A</td><td colspan="2">QUALITY SYMBOLS</td><td colspan="2">Tolerance</td><td colspan="2">NAME:</td><td colspan="2">PART NO.</td><td colspan="2">B02-05011E0-01</td><td colspan="2">DRAWING NO.</td></tr><tr><td colspan="2">A</td><td colspan="2">□ : MAJOR</td><td colspan="2">X. ±0.50</td><td colspan="2">REV: B</td><td colspan="2">DRW BY</td><td colspan="2">CHK BY</td><td colspan="2">APP BY</td></tr><tr><td colspan="2">A</td><td colspan="2">2021/06/15 新版发行</td><td colspan="2">.x ±0.30</td><td colspan="2">DATE: 2021/06/15</td><td colspan="2">DAWN HU</td><td colspan="2">KING ZHOU</td><td colspan="2">B03-0501</td></tr><tr><td colspan="2">SIDE</td><td colspan="2">DATE</td><td colspan="2">DESCRIPTION</td><td colspan="2">APPROVER</td><td colspan="2">ZERO DEFECT</td><td colspan="2">S.P.C</td><td colspan="2"></td></tr><tr><td colspan="2">8</td><td colspan="2">7</td><td colspan="2">6</td><td colspan="2">5</td><td colspan="2">4</td><td colspan="2">3</td><td colspan="2">2</td></tr><tr><td colspan="16">东莞市箐国电子有限公司</td></tr></table>																A		QUALITY SYMBOLS		Tolerance		NAME:		PART NO.		B02-05011E0-01		DRAWING NO.		A		□ : MAJOR		X. ±0.50		REV: B		DRW BY		CHK BY		APP BY		A		2021/06/15 新版发行		.x ±0.30		DATE: 2021/06/15		DAWN HU		KING ZHOU		B03-0501		SIDE		DATE		DESCRIPTION		APPROVER		ZERO DEFECT		S.P.C				8		7		6		5		4		3		2		东莞市箐国电子有限公司															
A		QUALITY SYMBOLS		Tolerance		NAME:		PART NO.		B02-05011E0-01		DRAWING NO.																																																																																									
A		□ : MAJOR		X. ±0.50		REV: B		DRW BY		CHK BY		APP BY																																																																																									
A		2021/06/15 新版发行		.x ±0.30		DATE: 2021/06/15		DAWN HU		KING ZHOU		B03-0501																																																																																									
SIDE		DATE		DESCRIPTION		APPROVER		ZERO DEFECT		S.P.C																																																																																											
8		7		6		5		4		3		2																																																																																									
东莞市箐国电子有限公司																																																																																																					

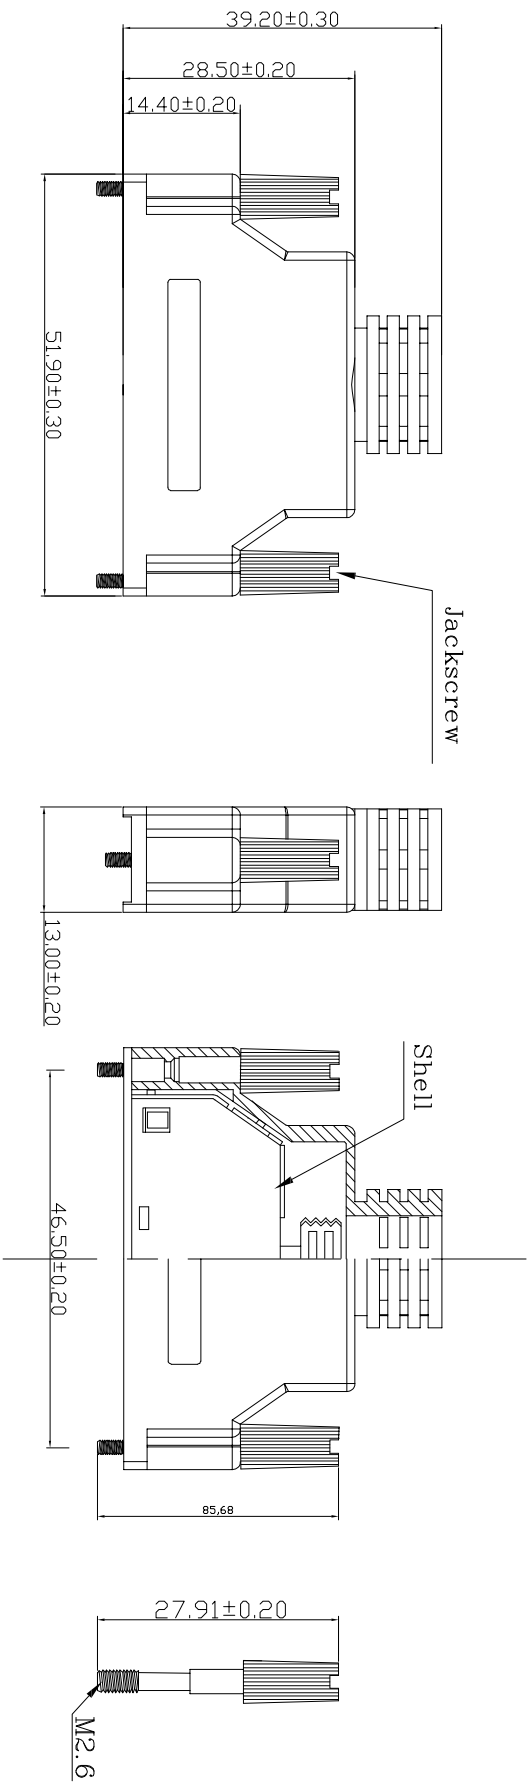

Contact Current Rating: 1 Amp
Dielectric Withstanding Voltage: 500V AC/Min
Insulation Resistance: 500MΩ/Min
Contact Resistance: 35mΩ/Max
Operation Temperature: -45°C ~ +85°C

PART NO:


B03-050N11NX-X1

JACKSCREWS:

7 = M2.6
8 = 2-56#
9 = 4-40#

ENTRY HOLE SIZES:

9 = (DD 9.0mm)
A = (CD 10.5mm)

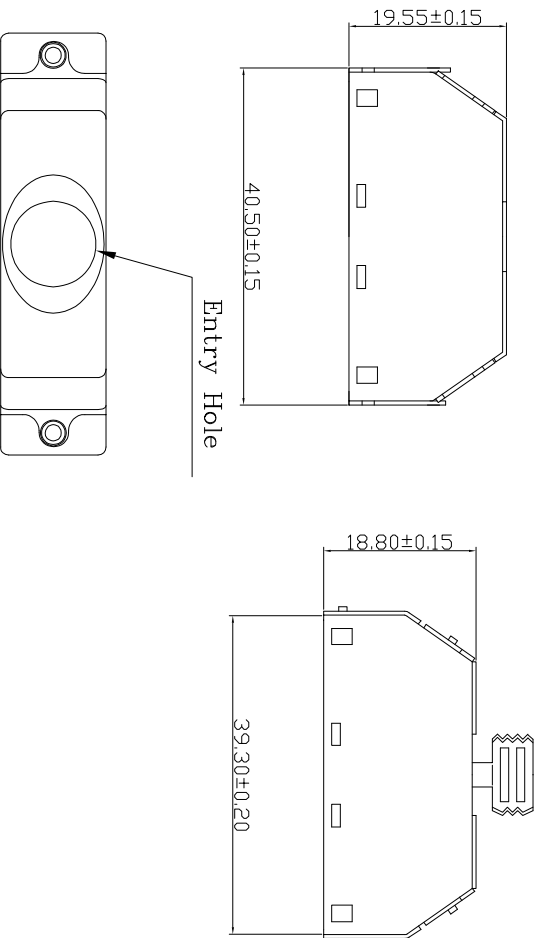

ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS
1	COVER	ABS+30%G.F. (UL 94V-0)	COLOR:BLACK	
2	SCREW	STEEL	Ni Plating	
3	SHELL	SPCC (t=0.50mm)	Ni Plating	

NAME:	SCS 50P Male ABS Hood For Cable	PART NO.	B03-050N11NX-X1	DRAWING NO.	B02-1003
REV:	B	UNIT:	mm	CHK BY	APP BY
SCALE:	N:1	DATE:	2021/06/15	DAWN HU	KING ZHOU

东莞市箐国电子有限公司

QUALITY SYMBOLS	☐ : ☒ : CRITICAL MAJOR ZERO DEFECT S.P.C
Tolerance	X. ±0.50 X. ±0.30 .xx ±0.15
APPROVER	King Zhou

DATE	2021/06/15新版发行
SIDE	8