



REV.	DESCRIPTION	DATE
△	電線の外径は5.5mmから、5.2mmに変更しました。	2021-01-15
△		

RoHS

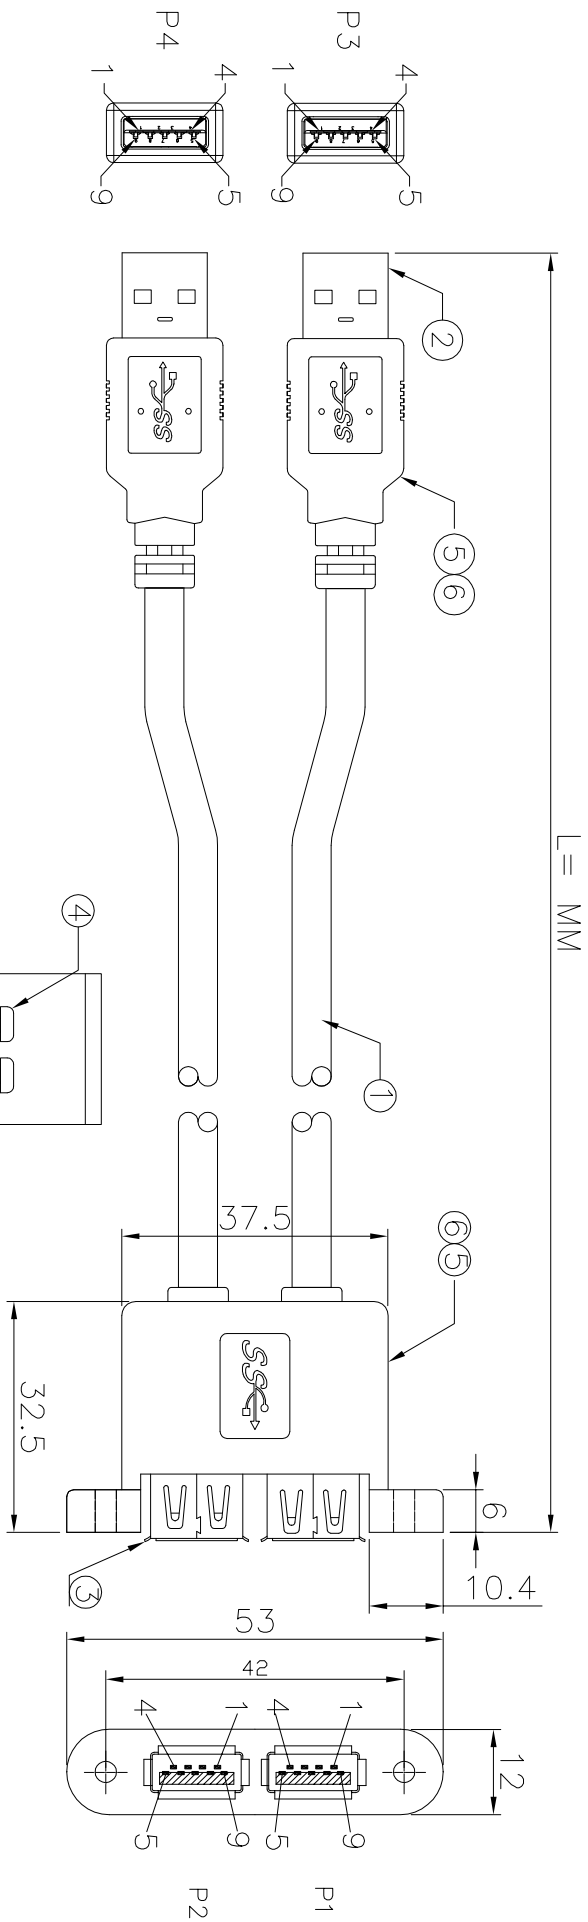

- NOTE:
1. 100% OPEN & SHORT WIRE TEST;
 2. CONTACT RESISTANCE 2ohm Max;
 3. INSULATION RESISTANCE 10M ohm Min;
 4. HI-POT DC 300V;

Port NO	LENGTH	REMARK
1	LKU30A1001-A	L=1000MM ±20
2	LKU30A1002-A	L=2000MM ±30
3	LKU30A1003-A	L=2500MM ±35
4	LKU30A1004-A	L=3000MM ±40

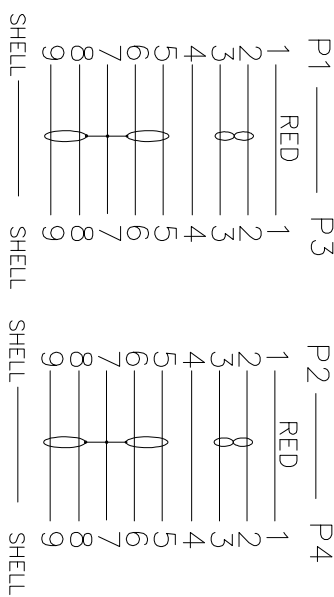

6	OVER MOULD	TPE BLACK 90A	NA						
5	MOULD	PE	NA						
4	SCREW+NUT	SCREW M3*10 + NUT M3*2	2PCS						
3	CONNECTOR	USB 3.0 A Female Au:G/F Blue	2PCS						
2	CONNECTOR	USB 3.0 A Male Au:G/F Blue	2SET						
1	WIRE	UL20276 (USB3.0) (1P#28+AE)*2+2C#24+1P#28+AEB(AL) OD:5.2MM Black TPE Jacket(Rating TEMP:-40℃~+100℃)	2PCS						
NO.	MATERIAL.P/N	DESCRIPTION	Q'TY	VENDOR	APPROVED:				

东莞市箐国电子有限公司

UNLESS OTHERWISE SPECIFIED
TOLERANCE: x.xx ± .x; angles ± .x

DESCRIPTION: 2 x (USB 3.0 A-M to A-F) Adapter Cable

CUSTOMER P/N: LKU30A100X-A

PRODUCT NO.: DWG NO: 20190802-02

SCALE: NONE

REV: X/0

UNIT: mm

DATE: 20.06.19

SHEET: 1 of 1