


Voltage Current Rating: 3 AMP.
 Dielectric Withstanding Voltage: 1000V AC
 Insulation Resistance: 1000M Ω Min.
 Temperature Range: -45°C to +85°C

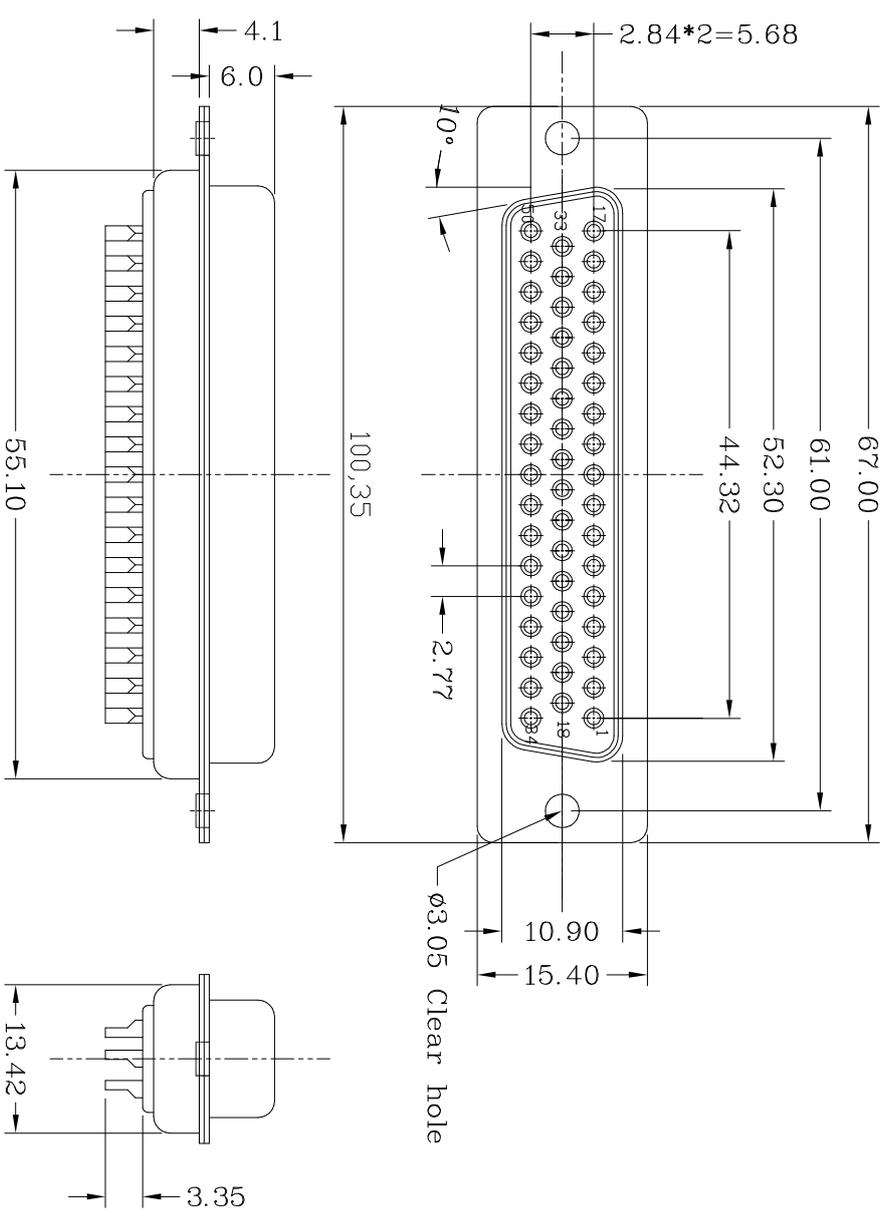

PART NO: B04-0504X14N-02
 HOUSING COLOR: 1 = BLACK
 5 = WHITE

4	REAR SHELL	SPCC	PALTING:Sn	
3	FRONT SHELL	SPCC	PALTING:NI	
2	HOUSING	PBT+30%GF	COLOR:SEE PART NO.	
1	TERMINAL	COPPER ALLOY	CONTACT AREA:G/F	
			SOLDER AREA:Sn	

NAME:	D-SUB 50P 母头焊接式 (车针)				PART NO.	B04-0504X14N-02	REMARKS	
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	AD1-002
SCALE:	N:1	DATE:	2012/08/12	DAWN HU	KING ZHOU			

东莞市箐围电子有限公司

QUALITY SYMBOLS	<input type="checkbox"/> : CRITICAL	<input checked="" type="checkbox"/> : MAJOR
Tolerance	X: ±0.50	.X: ±0.30
	∇: ZERO DEFECT	S.P.C

DATE	2012/08/12新版发行	APPROVER	King Zhou
DESCRIPTION			

DATE	2012/08/12新版发行	APPROVER	King Zhou
DESCRIPTION			