


REV.	DESCRIPTION	DATE
△		
△		

RoHS

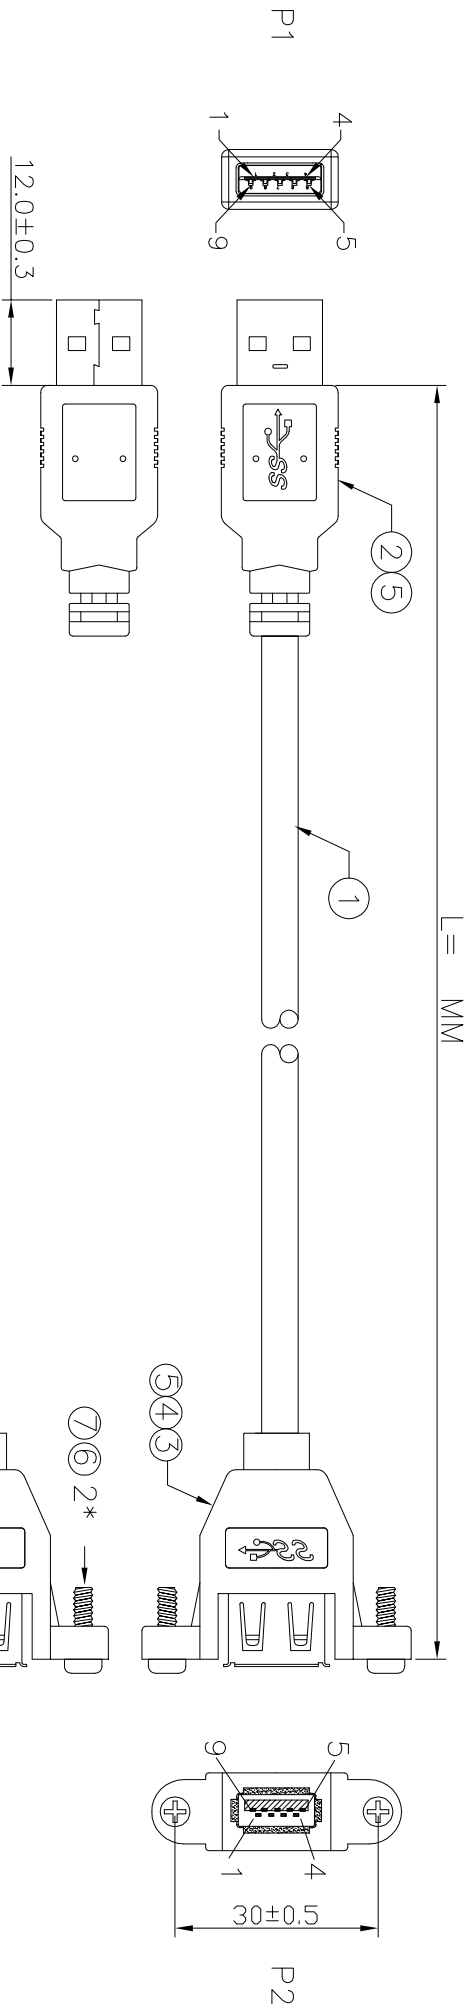

PIN OUT

P1	P2
1 RED	1
2 WHITE	2
3 GREEN	3
4 BLACK	4
5 BLUE	5
6 YELLOW	6
7 DRAIN	7
8 PURPLE	8
9 ORANGE	9
SHELL DRAIN+BRAID	SHELL

NOTE:

1. 100% OPEN & SHORT WIRE TEST;
2. CONTACT RESISTANCE 2ohm Max;
3. INSULATION RESISTANCE 10M ohm Min;
4. HI-POT DC 300V;

7	SCREW	4*10MM M.3 SCREW	2PCS		UNLESS OTHERWISE SPECIFIED TOLERANCE X.X ± ; X.X ± ; angles ± ; DESCRIPTION: USB 3.0 A/M TO A/F With Screw Cable
6	NUT	M.3 NUT	2PCS		
5	PVC	45P BLACK PVC	—		
4	PE	PE	—		
3	CONN.	USB(3.0) A TYPE FEMALE White Insulation PIN/1u" PLANT-SHEEL	1PCS		
2	CONN.	USB(3.0) A TYPE MALE White Insulation PIN/1u" PLANT-SHEEL	1PCS		DRAWN: CHECKED: APPROVED: CUSTOMER P/N: LKU30AMAF02-XXM PRODUCT NO.: DWG NO: 20190617-02 REV: X/O UNIT: mm DATE:19.06.17
1	CABLE	UL20276 (USB3.0) (1P#28+AE)*2+2C#24+1P#28+AEB(AL) OD=5.5MM BLACK PVC Jacket	—		
NO.	MATERIAL.P/N	DESCRIPTION	Q'TY	VENDOR	

东莞市箐国电子有限公司